

60p

YOUR COMPUTER

APRIL 1982

Vol.2 No.4

Adventure on ZX-81

Vic-20 expansion

ZX-81 ports

BBC graphics

Hi-res on Vic-20

ZX-81 sorting



**Win Memotech 64K
RAM for ZX-81**

PERSONAL COM

LONELY Genie I Microcomputer, early eighties, with large peripheral family but currently unattached, would like to meet interesting, attractively packaged software, Genie or Tandy specification, for programming, problem solving, entertainment and long-lasting friendship. Reply in confidence. Box No RS232.

ANSWERING MACHINES

Office certified

LON
intel
vated

ATTI
wish
may
mar

SO
me
(mu
tion.
hum

MAI
to
wait
wis



ingenious ...but lonely!

Buying your first Genie I microcomputer is just the start of a long and enthralling adventure, for it won't be long before you will want to expand your system with some of the wide range of peripherals which make up the complete Genie System.



Firstly there is the **Expansion Box**, which immediately expands your Genie's capacity to 32K RAM, and up to 48K RAM if required. It can be connected to 4 disk drives, a printer, RS232 interface or S100 cards.

Then there is the **Printer**,

a compact unit with 80 column, 5 x 7 matrix print-out, which connects to your Genie through the Expander, or via the Parallel Printer Interface.



The **Disk Drive** gives you greater storage capacity and full random access file handling, with the option of double-density through a special adapter. New Dual Disk Drive now available!



Finally, there is Genie's very own **12" Monitor**, a must if you want to let the rest of the family watch their T.V. in peace! Available in B & W or green tube.



The supreme advantage of the Genie I system is its compatibility with the TRS 80, which means that literally 1000's of pre-recorded programs are already available, just waiting to be plugged into your Genie!

The recent improvements in the Genie system, including Extended Basic, sound unit and machine language monitor, make it the ideal system for the committed hobbyist, and an excellent and easy-to-use educational tool.



**SPECIAL TECHNICAL GENIE
HOT - LINE ON 0629 4995**

for all your technical advice and service back-up on any aspect of the Genie system direct from the experts!

Please send me FREE, 16 page colour brochure on the Genie Computer System. I enclose 25p postage.

Name

Address

Telephone YC-82

**LOWE
electronics**

Chesterfield Road,
Matlock,
Derbyshire DE4 5LE.
Telephone: 0629 4995.
Telex: 377482 Lowlec G.

YOUR COMPUTER

| | | | | | |
|---|----|--|----|---|----|
| YOUR LETTERS: | 15 | SORTING ON THE ZX-81: | 37 | VIC-20 HIGH RESOLUTION: | 57 |
| Feminist input; cleaning chips; BBC Micro. | | David Lawrence examines the pros and cons of different sorting programs and discovers why some programs take much longer than others to perform the same task. | | Nick Hampshire shows how to write a high-resolution point-plotting program. | |
| NEWS: | 16 | BASIC DIALECTS: | 40 | HANDICAPPED COMPETITION: | 61 |
| Floppy discs for the Atom; Timex to make ZX-81 in U.S.; Apple Olympics; London computer summer school. | | The first in a series of articles by Tony Edwards on converting Basic programs from one dialect to another. | | A competition to design a microcomputer aid for the handicapped by John Dawson. | |
| COMPUTER CLUB: | 19 | BBC GRAPHICS: | 42 | RESPONSE FRAME: | 65 |
| Orpington Computer Club announces its associate membership scheme. | | Jeremy Ruston explains how to change the colour of a picture or diagram without redrawing it on the screen. | | Answers to your technical queries. | |
| VIC-20 ADD-ONS: | 20 | ATOM LINE LABELLING: | 45 | FINGERTIPS: | 67 |
| Tim Hartnell reviews the range of Vic-20 add-ons, from joysticks to motherboards, and decides which offer the best value. | | The Atom line-labelling system makes simple renumbering possible without using Goto or Gosub. Roy Burgin examines the intricacies of line labelling. | | David Pringle introduces more calculator programs and looks at simple statistical functions. | |
| ADVENTURE ON THE ZX-81: | 24 | GAME: | 48 | SOFTWARE FILE: | 71 |
| How to write your own Adventure program by Graham Thomson. | | Nim — two programs, one for the ZX-81 and one for the Apple II, on this ancient game by David Lawrence and Sean Overend. | | Eight pages of your programs featuring the Video Genie, ZX-80/81, Vic-20, Atom and others. | |
| INTERVIEW: | 28 | | | COMPETITION CORNER: | 83 |
| Brendon Gore talks to John Baxter, Commodore's U.K. marketing manager, about the Vic-20. | | | | Result of the Troll Plague competition and another puzzle with a £15 book token as prize. The Memotech 64K RAM crossword falls between pages 18 and 19. | |
| ZX-81 I/O PORTS REVIEW: | 32 | | | | |
| Stephen Adams looks at the growing number of input/output ports available for the ZX-81. | | | | | |

Cover photograph by Stephen Oliver.

Editor
DUNCAN SCOT

Assistant Editor
BRENDON GORE

Staff Writer
BILL BENNETT

Production Editor
TOBY WOLPE

Production Assistants
MEIRION JONES
JOHN LIEBMANN

Editorial Secretary
LYNN COWLING

Editorial: 01-661 3144

Advertisement Manager
PHILIP KIRBY 01-661 3127

Advertisement Executives
KEN WALFORD 01-661 3139
BILL ARDLEY 01-661 3127

Midlands Office
DAVID HARVETT 021-356 4838

Northern Office
RON SOUTHALL 061-872 8861

Advertisement Secretary
MANDY MORLEY

Publishing Director
CHRIS HIPWELL

Your Computer, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.
Typesetting by In-Step Ltd, London EC1.
Printed by Riverside Press Ltd, Whitstable, Kent.

Subscriptions: U.K. £8 for 12 issues.
©IPC Business Press Ltd 1982

Published by IPC Electrical-Electronic Press Ltd, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01-661 3500 Telex/grams: 892084 BIPRESG.

EDITORIAL

ON AVERAGE, a company has been formed every second day for the past year to supply and make software and hardware add-ons for the ZX-81. It is an impressive record and one from which some of the well-established computer companies could learn a great deal. It happened because the price of the ZX-81 was sufficiently low to create a new market of first-time buyers, most of them with very limited budgets.

Clive Sinclair knew that he was taking a big risk when he launched his ZX range of computers at the start of 1980: he had to strike a delicate balance between the power of his computers and setting a price low enough to attract the consumer markets. Luckily for all of us he struck the right formula. It is an obvious, if risky, recipe which, when it works, brings very high rewards, as can be seen from the rise in Sinclair's revenue from £4 million to £30 million in one year. Unfortunately, it is a formula which is only tried rarely by other companies.

Before the home-computer market really took off, most of the computers sold in Britain were American. The Americans regarded Britain as a wonderful market, mainly because they could sell computers over here at roughly twice the price they could sell them in the States. They did not sell them in vast quantities, but the profit margins compensated for that admirably. The dealers, and the manufacturers, always justified the high prices on the grounds that it was the only way they could afford to provide an acceptable back-up service. There was never, however, the slightest evidence that the service we were offered in the U.K. was any better than that offered in the States.

It is a mystery quite how Britain came to be regarded as a country where one could get away with over-pricing. The same arrangement pervades the motor-car industry in which an average car can cost up to £3,000 more than it would on the Continent. The British arm of Ford has said that but for the high prices it can charge in Britain it could not afford to keep its British manufacturing plants running at anything like the present level.

This is a peculiarly British problem for which, to a large extent, we are all to blame for allowing it to happen. The solution also lies in our hands: where we encounter products which are clearly over-priced, we must clearly state that we will not buy them until the price falls to a reasonable level. Take the market for Sinclair products as your guideline. We know that tapes of games packs can be sold quite profitably for between £5 and £10. We know that a 16K RAM pack can be sold for as little as £35. Some products will be better than others and might be more expensive but they should be in the same range.

As new machines enter the market we will all have to be careful not to allow a surreptitious hike in prices. Take the Sinclair norm as your yardstick and barter. ■

Step by step with the computer system designed for tomorrow.

- * 6502 Microprocessor
- * 2K Monitor TANBUG
- * Intelligent socket accepts keypad or full ASCII Keyboard
- * Chunky Graphics and Lower Case Options
- * Connects to unmodified B/W or Colour TV

For the first time buyer or experienced user, Microtan 65 is a superb route into personal computing. If you are looking for a sophisticated machine with the capability of expansion into a professional system, then this is the

Microtan 65
£79.00 Ready +VAT Built
£69.00 Kit +VAT

and allow graphics to be built up on the screen at a resolution of 64 rows by 64 columns.

Lower Case Option

To extend the character set to 128 characters, allows for real descenders on lower case characters and a set of extra symbols and characters for simple graphics.

Microtan Accessories

20-way Hex keypad MPS 1 Basic power supply

Aerial connector lead

Full ASCII Keyboard

MPS 2 Full system

power supply

Mini — motherboard

Microtan is available ready-built or as a kit. We recommend that you should have some soldering experience before attempting the Microtan Kit, although if you do run into problems you can make use of our "Get you Going" service

(telephone for details).


TANEX

- * 7K Static Ram
- * 10K Microsoft Basic
- * 32 Parallel I/O lines
- * 1 Serial I/O port
- * XBUG
- * Cassette Interface

The first step in expanding your system. Tanex provides the extra facilities necessary for the serious programmer. Memory expansion: Tanex has provisions for up to 7K of static RAM and up to 14K of EPROM using 2716 or 2732 chips.

XBUG and BASIC

XBUG is a 2K extension to TANBUG that contains a mnemonic assembler and disassembler and cassette firmware running at 300 Baud CUTS, standard or high speed, 2400 Baud Tangerine standard with 6 character filenames. Tangerine have taken out a full O.E.M. licence for Microsoft BASIC, the microcomputer industry standard, this is a full feature implementation with interrupt and machine code handling, and a superb program editor.

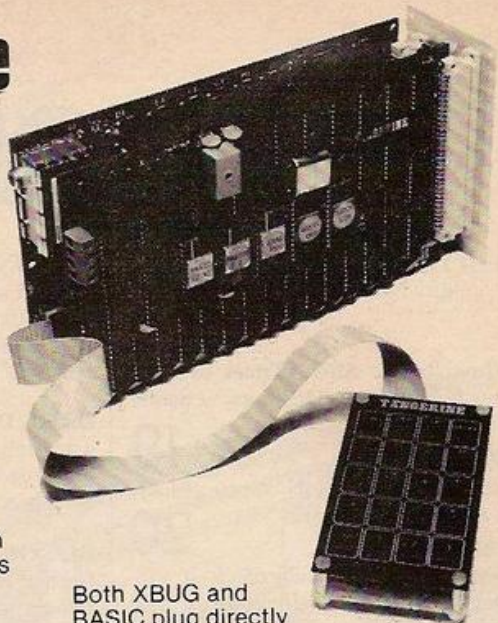

Both XBUG and BASIC plug directly into Tanex and are supplied with comprehensive user manuals.

Parallel I/O

When fully expanded Tanex includes two V.I.A.s (Versatile Interface Adaptors) which implement the cassette interface and the parallel I/O ports. Software in TANBUG V2.3 enables you to plug in and use a Centronics type printer. The two V.I.A.s also contain counter timers that can be used for a variety of applications enhanced by the use of the integral handshake facilities.

Serial I/O

Also on the expanded board is a serial I/O port that can be used to interface RS232 or 20Ma loop terminals or VDU's, again all controlled by TANBUG V2.3.



computer for you. Step by step with the computer system designed for tomorrow. . . .

6502 Microprocessor

Probably the most popular CPU (central processing unit) for personal computers, having a powerful instruction set and architecture.

2K Monitor TANBUG

The built-in 'mind' of the machine, TANBUG controls all system functions and gives comprehensive machine-code facilities. Functions include: set and clear breakpoints, single step through program, execute program, copy block of memory, modify memory locations and much more.

Intelligent keyboard socket

For absolute beginners we can supply an easy to use 20-way Hex keypad; for the more experienced user there is a full typewriter style ASCII keyboard. Either way, Microtan will work out exactly which type you are using and act appropriately.

Chunky Graphics Options

For drawing simple lines and graphs, or for animated games, Chunky Graphics is a low cost answer. This set of chips plug into the Microtan board

tangerine
 computer systems ltd
 Forehill Works, Ely,
 Cambs. CB7 4AE.

TO: TANGERINE COMPUTER SYSTEMS LTD.,
 FOREHILL WORKS, ELY, CAMBS. CB7 4AE.

PLEASE SEND ME:

- ☐ MICROTAN 65, READY BUILT £92.35 incl. VAT and P&P.
- ☐ MICROTAN 65 KIT £80.85 incl. VAT and P&P.
- ☐ TANEX (MIN CONFIG) KIT £50.95 incl. VAT and P&P.
- ☐ TANEX (MIN CONFIG) ASSEMBLED £62.45 incl. VAT and P&P.
- ☐ EXPANDED TANEX KIT £104.66 incl. VAT and P&P.
- ☐ EXPANDED TANEX ASSEMBLED £116.16 incl. VAT and P&P.
- ☐ PLEASE SEND ME THE NEXT SIX ISSUES OF TANSOFT GAZETTE AT £15.00.

I enclose my cheque for £.....
 or debit my Access/Barclaycard

Signature

Name

Address

(Block capitals please) YC

We are only 30 minutes from CENTRAL LONDON

and only a few minutes from
Your Postbox

Why not try our new Mail Order Service?

See us at
Stands 661, 659, 657
Computer Fair

ACORN ATOM



Assembled from
£155.25
(While stocks last)

BBC MICROCOMPUTER



For details of availability
Phone 0708-60725


WE ARE DEALERS FOR
ACORNSOFT, ADVENTURE
INTERNATIONAL, ATARI,
AUDIOGENIC, AVALON HILL,
BUG BYTE, COMMODORE,
PROGRAM POWER & THORN/
EMI SOFTWARE.

VIC-20



£199.99

ATARI 400 & 800



From £299.95 & £599.95

STOP PRESS: NOW IN STOCK
THE BBC PUBLICATION "THE COMPUTER BOOK" £6.75

All prices include V.A.T. Add £3.00 P&P per order
For further information send large S.A.E.




Computers for All



72 North Street, Romford, Essex. Tel: 0708 752862

it's here at last!

NEW

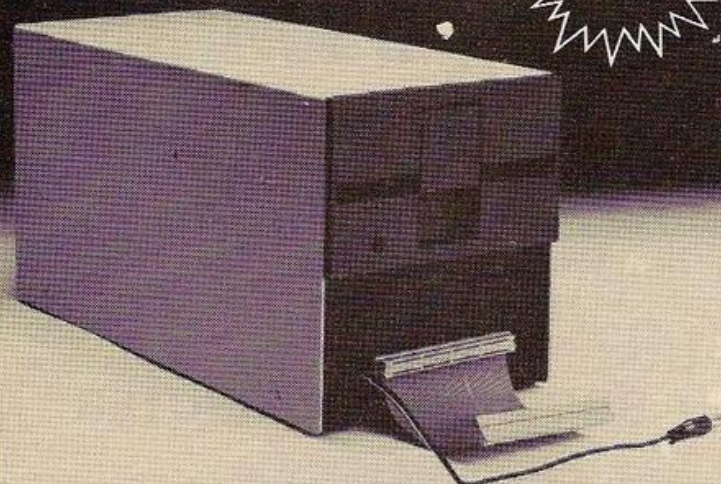

Upgrade your atom with our new low cost disc pack only £299 plus VAT

- 40 - track single-sided 5 1/4" disc drive
- power supply to run both the disc pack and a fully expanded Atom
- disc controller card with 4K DOS ROM
- 3k bytes of static RAM
- 64-way Euro-connector plug and cable
- full operating instructions and manual

The disc controller is based on the Intel 8271 chip. This highly intelligent device minimises the amount of control software and memory requirement and so allows phenomenal high speed operation. Both software and hardware has been vigorously tested and proved very, very reliable.

You will need an Atom with bus buffers and indirect edge connectors. The mail order price is £350 including VAT post, packing and insurance, the price at your Atom dealer £345.

If you do not have a dealer near you just write to us at the address below, or credit card holders can ring Cambridge (0223) 245200 and order directly.



Acorn Computers Ltd.,
Fulbourne Road,
Cherry Hinton, CAMBRIDGE

Disc pack for the atom

The disk operating system (DOS) decodes the following commands used to control the storage of files on disk:-

- * CAT catalogue files on disk
- * LOAD load image of memory contents as file
- * SAVE save image of memory contents as file
- * DELETE delete file from disk
- * SPOOL store all printer characters on disk
- * EXEC read characters from disk as if from keyboard

The DOS also replaces the cassette operating system vectors as used by BASIC to allow the use of the following commands in Atom BASIC:-

- LOAD load BASIC program from disk
- SAVE save BASIC program to disk
- FOUT open file for output
- FIN open file for input
- SHUT close file
- EXT find extent of file
- PRT find value of pointer into file
- PUT put number to file
- BPUT put byte to file
- SPUT put string to file
- GET get number from file
- BGET get byte from file
- SGET get string from file

These commands provide full random access of up to 5 disk files simultaneously.

Brand new colour board NOW YOUR LIFE CAN BE MORE COLOURFUL!

£39

The board fits inside the Atom and generates colour output suitable for all makes of monitors and TV's.

Two colour palettes can be achieved Red, Yellow, Green, Blue and White, Cyan, Magenta, Orange. In text modes this provides green on blue or orange on black displays.

Three outputs are provided:-

- Red, Green, Blue drives at TTL levels with a composite sync, the polarity of which may be link selected.
- A 1v composite video in monochrome only.
- A PAL encoded signal on Channel 36 suitable for feeding into the aerial socket on a domestic television.

You can fit the board yourself using a fine soldering iron or your dealer will fit it for you. The board can be used in a minimum Atom with the existing power supply, or if used in a maximum Atom a 5V externally regulated supply will be necessary.

Available from all Acorn Dealers or direct from Acorn at £45.24 inc VAT and p+p. Credit card holders can ring (0223) 245200 and place their orders direct.



Acorn Computers
Fulbourne Road,
Cherry Hinton, Cambridge

Use Your Atom for~

Planning Writing Estimating
Scheduling Calculating Recalculating Erasing
Revising Critical Path Analysis....
With ATOMCALC only £39.10 inc. VAT

| REFERENCE | COST | VAT | TOTAL |
|-----------|-------|-------|--------|
| FOOD | 63.39 | 0.00 | 63.39 |
| JAG | 12.00 | 1.80 | 13.80 |
| ELECT. | 33.20 | 4.98 | 38.18 |
| PHONE | 7.10 | 1.06 | 8.16 |
| RENT | 95.85 | 14.33 | 110.18 |
| PETROL | 47.10 | 7.06 | 54.16 |
| INSURE | 20.11 | 3.46 | 23.57 |
| EXPENSES | | | 314.99 |
| INCOME | | | 325.00 |
| SAVING | | | 10.01 |

What is it?

Atomcalc is supplied as a plug-in 4k ROM with an all-purpose planning and modelling program. It is so easy to use - if you can use a calculator you can use Atomcalc. No programming skill needed.

The ROM creates an enormous grid of columns and rows like a ledger. All you do is to enter the headings and formula once and Atomcalc does the rest. Supplied with a very detailed 30pp user handbook.

What will it do?

Atomcalc can cope with anything from a household budget to company accounts. You set up a series of automatic calculating functions like totalling or percentages. Then fill in the columns with your figures and the program produces the answers. If you want to change one figure in the calculation it immediately changes the relationship of all the other figures involved. So, for example, you can see what effect on profit a 5% increase in sales might have or a 10% increase in production, or a 3% drop in transport.

And do not forget you can print them out on an optional printer or store them on tape.

How Can I Buy One?

Go to your Atom Dealer, or if there are none in your area just send a cheque for £39.10 (incl. VAT and P & P) to the address below. Credit Card holders can ring Cambridge (0223) 316039 and order direct.

Dept. I-6 Acornsoft Ltd, 4a Market Hill, CAMBRIDGE.

ACORNSOFT



ACORNSOFT

ACORN DEALERS

**For all the latest Atom hardware
and software
contact the dealers below**

Personal Computers
20 Wellington Square
AYR
(0292) 285082

Gamer
24 Gloucester Road
BRIGHTON
(0273) 698424

Computer Shack
14 Pittville Street
CHELTENHAM
(0242) 584343

Cardigan Electronics
Chancery Lane
CARDIGAN
(0239) 614483

H.C.C.S.
541 Durham Road
Low Fell
GATESHEAD
(0632) 821924

The Centre of Sound
120 Notting Hill Gate
LONDON W11
(01-727) 0511

Arden Personal Computers
166 Park Road
PETERBOROUGH
(0733) 47767

3D Computers
230 Tolworth Rise South
SURBITON
(01-337) 4317

Broadway Electronics Ltd
The Broadway
BEDFORD
(0234) 213639

Cambridge Computer Store
1 Emmanuel Street
CAMBRIDGE
(0223) 65334

Vixon Computer Systems
49 Grimsby Road
CLEETHORPES
(0472) 58561

Microage
135 Hale Lane
EDGWARE
(01-959) 7119

P.J. Equipments Ltd
3 Bridge Street
GUILDFORD
(0483) 504801

Euro-Cal
55/56 High Holborn
LONDON WC1
(01-405) 3113

**R.D.S. Electrical
(Portsmouth) Ltd**
157/161 Kingston Road
PORTSMOUTH
(0705) 812478

Computer Plus
47 Queens Road
WATFORD
(0923) 33927

Microcentre Ltd
Commercial House
19 Station Road
BOGNOR REGIS
(0243) 82779/828108

**M.D. Wright Data
Services Ltd**
13 Vernon Place
CANTERBURY
(0227) 69090

Datron Micro Centre
Duckworth Square
DERBY
(0332) 380085

Silicon Centre
21 Comely Bank Road
EDINBURGH
(031-332) 5277

D A Computers
184 London Road
LEICESTER
(0533) 549407

N.S.C. Computing Shops
29 Hanging Ditch
MANCHESTER
(061-832) 2269

Computers For All
Romford Computer Shop
72 North Street
ROMFORD
(0708) 752862

Datex Micros
193 Tarring Road
WORTHING
(0903) 39290

Eltec Services Ltd
231 Manningham Lane
BRADFORD
(0274) 491372

Cardiff Micro Centre
46 Charles Street
CARDIFF
(0222) 373072

**Lendac Data Systems
Ltd**
8 Dawson Street
DUBLIN
(0001) 372052

Northern Computers
Churchfield Road
Frodsham
Nr WARRINGTON
(0928) 35110

Group 70
208 Maybank Road
South Woodford
LONDON E18
(01-505) 7724

Q-Tek Systems Ltd
2 Daltry Close
Old Town
STEVENAGE
(0438) 65385

Datron Micro Centre
2 Abbydale
SHEFFIELD
(0742) 585490

ZX81/ 16K SOFTWARE

"STARTREK"

16K STARTREK: Exciting space adventure game including klingons starbases, phasors, 8x8 galaxy, 4-levels of play, long and short range scanners, etc.

"SUPER-WUMPUS"

16K SUPER-WUMPUS: Can you hunt and catch the mysterious wumpus in his underground labyrinth? Intriguing underground adventure.

"GRAPHIC GOLF"

16K GRAPHIC GOLF: Test your golfing skills on SILVERSOFT'S 18-hole golf course. Many hazards including lakes, trees, streams, rough, etc.

"GAMES PACK 1"

16K GAMES PACK 1: Fantastic value for money, nearly 50K of programs on one cassette. Five games including "Real Time Graphic" Lunar Lander, Starwars, Hammurabi, Minefield, Mastermind.

Prices: £4.95 each cassette; £8.95 any two.

Programs wanted, excellent royalties.

"3D-MYSTERY MAZE"

16K 3D MYSTERY MAZE: Amazing three dimensional maze. Walk through the maze in 3-dimensions, ultra-fast machine code display, hundreds of different mazes.

"ZOMBIES"

Can you escape from the man-eating zombies by leading them into the pits?

VIC 20 SOFTWARE COMING SOON!

Cheques/POs payable to "SILVERSOFT".

Name

Address

**See us at Stand V20
Computer Fair**

CVG 4/82

SILVERSOFT (Dept. CVG)
40 Empress Avenue, Ilford, Essex.
Tel: 01-518 0877

MICRO-80

UK Subscription Dept.

24 Woodhill Park Pembury Tunbridge Wells Kent TN2 4NW

GET THIS free software offer when you subscribe to MICRO-80 — The specialist magazine for TRS-80 and VIDEO GENIE.

LOOK AT the programs you get FREE when you subscribe . . .

★ **Level I in Level II** — Convert your Level II TRS-80 to operate as a Level I machine. Opens a whole new library of software for your use.

★ **Copier** — Copies Level II System tapes, irrespective of where they load in memory. Copes with multiple ORG programs.

★ **Z80 MON** — A low memory, machine language monitor which enables you to insert OP codes, edit memory, punch system tapes etc.

★ **Improved Household Accounts** — Powerful enough to be used by a small business.

★ **80 Composer** — A music generating program which enables you to play music via your cassette cord.

★ **Plus Two Games** — Poker and Cube (a version of the Rubiks cube for Disk users) and don't forget MICRO-80 is now available in monthly cassette edition as well — all the published programs each month ready to load on cassette.

Please enrol me for an annual subscription and send me my FREE cassette program. I enclose £16.00 ☐ (magazine only) or £43.60 ☐ (magazine and cassette edition).
(enclose your cheque/P.O. made payable to MICRO-80 and send to the above address)
Software offer, and cassette edition prices applies to U.K. residents only. Overseas subscription rates on application.

Name

BLOCK CAPITALS PLEASE

Address

YC 4/82

SOFTWARE FOR THE VIC 20

PR SOFTWARE — dedicated to the finest value in software for the VIC — bring you PRCI:

6 Programs on 1 cassette for only £7.50

- | | |
|-----------------|---|
| 1. War! | Your artillery and defences, their tanks — a fight to the finish. |
| 2. Smashout | Colour, sound and skill to break through that wall. |
| 3. Blackjack | VIC's big day. |
| 4. Logic | Break the colour code before VIC breaks you! |
| 5. Pick-up-game | Match of the day? |
| 6. Alarm clock | Clock, chime, alarm, snooze. |

All programs run on the unexpanded VIC20

Please send.....copies of PRCI at £7.50 each inc. p&pp

I enclose cheque/PO for £.....

NAME.....

ADDRESS.....

PR SOFTWARE
28 THE FAIRWAY, SOUTH RUISLIP,
MIDDLESEX HA4 0RY

SPOCK: "Computer! Calculate the value of Pi to ten thousand decimal places"
COMPUTER: "Working..."

CAN YOUR COMPUTER SPEAK?

The **WIDEBAND SPEAKEASY** speech synthesiser adds voice response to any computer with a parallel port including PET, APPLE, expanded ATOM, HORIZON etc.

for Only £69 + VAT

- * UNLIMITED VOCABULARY
- * EASY TO PROGRAM
- * LOW MEMORY OVERHEAD
- * COMPLETE MANUAL WITH DICTIONARY, SAMPLE SOFTWARE AND TUTORIAL ON SPEECH PRODUCTION.



Also includes high flux speaker and power supply, all housed in high quality wood cabinet, with volume control and rear pitch control.

Programmed with simple phonetic codes. Apart from the obvious applications of voice response in manufacturing, testing, blind terminals etc., this product also teaches a great deal about linguistics and speech production.

Software is available in BASIC and Z-80 and 6502 assembly for direct input in PHONETIC SPELLING closely related to the ARPABET international phonetic alphabet.

For your nearest dealer contact:

WIDEBAND PRODUCTS, CAMBRIDGE RD.,
ORWELL, ROYSTON, HERTS. TEL: 0223 208017

A subsidiary of Sands-Whiteley Research and Development

ZX81 MEMORIES with a DIFFERENCE

ANNOUNCING THE END OF THE FLOPPY RAM PACK! — Now, for the first time, all you need to fit up to a full 56K of low power memory INSIDE your ZX81 (as is normal with more expensive personal computers), is a screwdriver. Experience has shown that the two commonest causes of ZX81 memory add-on failure are:

1. Lack of rigidity in the connection to the expansion port.
2. Inadequate regulated power supply.

Both these problems have been overcome with our low-power, internally fitting INCREMENTAL and MAXIMEM memories.

INCREMENTAL 1.2

The truly expandable memory system that starts you off at a price you can afford but places no restrictions on your future expansion.

- EASY TO FIT — The uniquely designed board plugs straight in to the existing microprocessor (CPU) socket on ZX81 board (See page 162 of ZX81 manual) so, following the instructions provided, you simply open up the ZX81 case, unplug the CPU and plug it into the memory board, then plug the memory board into the vacant CPU socket. Four additional bolts fit through existing holes in ZX81 board to give high rigidity/reliability. Simple to follow instructions makes child's play of fitting (and removing).

- TRULY EXPANDABLE — Expandable up to 16K bytes in increments of 2K simply by plugging in memory chips — but does not stop there! Plug and socket switches allow running in conjunction with external memory add-ons — e.g. with Sinclair 16K RAM pack to give up to 32K and with 32K and 48K packs to give up to 48K and 56K (max poss) respectively. Full instructions provided.

- ULTRA LOW POWER — A full 16K takes typically less power than existing 1K Sinclair RAM (about 40mA).

- ECONOMICAL — Incremental 1.2 with one 2K chip giving 3K of RAM costs only £16.43 (plus V.A.T.) and you won't have to throw it away when you want more memory.

- MONEY BACK GUARANTEE — Return within 14 days of receipt secures full refund of price of goods.

Introducing the new —

MAXIMEM 1.1

The ZX81 microprocessor can address a maximum of 64K of memory directly. More than this would require frequent additional statements in programs to switch between different memory banks. 8K of this 64K is already taken up by the Sinclair ROM (containing the Operating system program and Basic interpreter) thus leaving a maximum RAM capacity of 56K (= 64K-8K). The MAXIMEM 1.1 attains this upper limit in one bound by utilising the latest in high density, ultra-low-power memory. Board design is similar and fitting identical to the Incremental memory described above.

Orders and enquiries to: East London Robotics, Finlandia House, 14 Darwell Close, East Ham, London E64BT. Or call us on 01-471 3308.

| ORDER FORM | | | |
|------------|---|----------------|-------|
| Quantity | Item | Price per item | Total |
| | Incremental 1.2 socketed for max of 8K | £10.50 | |
| | Incremental 1.2 socketed for max of 16K | £11.50 | |
| | 2K CMOS 6116 memory chips | £4.93 | |
| | Maximem 1.1 56K memory | £93.50 | |
| | 15% VAT | | |
| | TOTAL | | |

NOTE: Postage 50p for orders under £15

I enclose a cheque/postal order payable to East London Robotics for £.....

Name:.....

Address:.....

JUST RELEASED!
Exciting new
learning programs for
ZX81 (16K) users!

NOW YOU CAN LEARN STATISTICS ON YOUR ZX81 (16K)!

The first true computer-assisted learning programs for Statistics, on the ZX81 and sold on high-quality cassettes.

Step-by-step learning method

Ideal for use in schools, colleges, and for any ZX81 users interested in furthering their education.

Now Available

1. PROBABILITY THEORY — 3 COUNTING RULES.
2. COUNTING AND THE PROBABILITY OF AN EVENT WITH DISTRIBUTION HISTOGRAMS.
3. MEASURES OF CENTRAL TENDENCY, DEVIATION AND VARIABILITY — MEAN, MEDIAN, MODE, STANDARD DEVIATION ETC.
4. CHI-SQUARE AND CONTINGENCY TABLES.
5. FISHER'S EXACT TEST.

These are the first five in this series of over twenty tapes.

CASSETTES ONLY £7 EACH (OR £33 FOR FIVE) INCLUDING FREE WORKBOOK!

**ONLY AVAILABLE FROM:
ALTIM TRADING LIMITED
29 ENDELL STREET, COVENT GARDEN
LONDON WC2H 9BA
Tel: 01-836 3309**

Personal Callers welcome (by prior appointment)

ORDER NOW! Please allow up to 28 days for delivery. Please make cheques payable to: ALTIM TRADING LTD.

State number of tape(s) required (at £7 each, or £33 for five) or send S.A.E. for further details of this series, to address above.

SAVE £2 ON SET OF 5 TAPES!

4K GRAPHICS ROM



Some of the graphics now possible on the ZX81.
See other page (4K Graphic ROM)

dK'tronics

See us at Stand V4
Computer Fair

ZX 80/81 HARDWARE/SOFTWARE

ZX KEYBOARD

Now with repeat key and facilities to add numeric pad. The keyboard has all the 80/81 functions on the keys, and will greatly increase your programming speed. It is fitted with push type keys as in larger computers.

The keyboard has been specially designed for the Sinclair computer and is supplied ready-built. It also has facilities for 3 extra buttons which could be used for on/off switch, reset, etc. £27.95. Numeric add on £10.



4K GRAPHICS ROM

The dK Graphic module is our latest ZX81 accessory. This module, unlike most other accessories fits neatly inside your computer under the keyboard. The module comes ready built, fully tested and complete with a 4K graphic ROM. This will give you 448 extra pre-programmed graphics, your normal graphic set contains 64. This means that you now have 512 graphics and with there inverse 1024. This now turns the 81 into a very powerful computer, with a graphic set rarely found on larger more expensive machines. In the ROM are lower case letters, bombs, bullets, rockets, tanks, a complete set of invaders graphics and that only accounts for about 50 of them, there are still about 400 left (that may give you an idea as to the scope of the new ROM). However, the module does not finish there; it also has a spare holder on the board which will accept a further 4K of ROM/RAM. This holder is fitted with a 1K/2K RAM and can be used for user defineable graphics so you can create your own custom charactor sets. £29.95.

MEMORY 80/81

16K RAM

Massive add-on memory for 80/81. £32.95.

16K KIT-A-KIT VERSION

of a 16K Ram. Full instructions included. All memory expansions plug into the user port at the rear of the computer. 16K RAM £42.95 16K KIT £32.95

2K & 4K RAM

Static Ram memory expansion for the 80/81. They both work with onboard Ram i.e. 4K plus onboard = 5K. This is the cheapest small memory expansion available anywhere. 2K RAM £14.95. 4K RAM £19.95.

IO PORT

Interface your computer with the real world, our IO port has holders to add up to 6K of RAM. £12.95.

16K 81 SOFTWARE

As seen at the ZX Microfair.

DEFLEX This totally new and very addictive game, which was highly acclaimed at the Microfair, uses fast moving graphics to provide a challenge requiring not only quick reaction, but also clever thinking. One and two player versions on same cassette. £3.95

3D/3D LABYRINTH You have all seen 3D Labyrinth games, but this goes one stage beyond; you must manoeuvre within a cubic maze and contend with corridors which may go left/right/up/down. Full size 3D graphical representation. £3.95.

CENTIPEDE. This is the first implementation of the popular arcade game on any micro anywhere. Never mind your invaders, etc., this is positively stunning, the speed at which this runs makes ZX invaders look like a game of simple snap. £4.95.
Graphic ROM Software Centipede. The graphic ROM version of our popular Centipede game. The only real version of Space Invaders on the ZX81.

dK'tronics

23 Sussex Road, Gorleston,
Great Yarmouth, Norfolk.
Telephone: Yarmouth (0493) 602453

SPACE FIGHTER

(6K + 3Kgr)
Super High-speed "Defender" game. 5 types of intelligent aliens. Repeating laser cannon, smart bombs, hi-score, rankings, bonus pts., 6 skill levels. Exciting sound effects. **£8.95**

COWBOY SHOOT-OUT

(12K)
Full feature, two-player, arcade shooting game. Cactus plants, moving chuck wagons, animated cowboys. Superb graphics & sound. **£6.95**

WARLORDS

(12K)
Another hi-speed arcade game with the medieval touch. Defend your castle & destroy your opponent's. Play against computer or other player. Exciting graphics. **£6.95**

MUNCHYMAN

(6K)
Outrun the munchers (or puckmen). Eat your way to a high points score and confrontation with the SUPER-MUNCHERS!! **£4.95**

ATOMSTORE

(12K +)
General purpose 'database' filing & printing program. User-defined fields. Variable field & record length. Highly economical. Use for names & addresses, product lists, price list — any data file. File search, printing & saving options. **£8.95**

ACORN ATOM

CHESS

(12K)
Improved graphics, plays back or white, mid-game level changes, look ahead up to 8 moves, offensive, normal & defensive play. 10 sub-levels, castling, "En passant" by player. Rejects illegal moves. Take back moves & action replay with take-over. Set up problem games. **ONLY £9.95**

ASTROBIRDS

(12K)
NEW version of this incredible GALAXIAN style game. Fantastic sound effects! Screaming missiles & swooping bird-men. NOW DOUBLE SPEED OPTION. The best game on the market. **£8.95**

INVADER FORCE

(12K)
Terrific version of 'Space Invaders' 4 types of invaders, mother ship, great sound, hi-score, 6 skill levels. **£8.95**

LUNAR LANDER

(12K)
Superb version of this arcade game, incl. long & short range scan, limited fuel supply. **£8.95**

3D ASTEROIDS

(6K + 2Kgr)
Steer through the rolling, hurtling asteroids. Excellent real life graphics. **£8.95**

MARTIANS

(12K + VIA)
Use your force field to stop them landing. Beware the imposters. Needs quick reactions. **£7.95**

CONSTELLATION

(12K + Fl.Pt)
Turn your ATOM into a telescope. View the stars from any point in the N. Hemisphere. 448 stars in 50 constellations instantly plotted against the night sky. Zoom in & out, raise & lower angle, rotate clockwise & anti-clockwise. **£8.95**

EXTRA MEMORY — Low power chips as recommended by Acorn 2 x 2114L — **£3.25**

WRITTEN ANY PROGRAMS? — WE PAY 20% ROYALTIES!

*****SPECIAL OFFER** — Deduct £1 per cassette when ordering 2 or more. ***

Please add 55p/order P & P + VAT @ 15%

Send Sae for FULL CATALOGUE

PROGRAM POWER

5, Wensley Road,
Leeds LS7 2LX.
Tel. (0532) 683186.



ATOM ADVENTURE

ALL THE EXCITEMENT,
INTRIGUE AND FRUSTRATION
OF A MAIN-FRAME ADVENTURE!

CRAMMED INTO A 12K ATOM

Explore the tortuous forests, dark caverns & castle dungeons. Beware the maze of twisting tunnels and the desert wastelands. Outwit the predators. Rescue the PRINCESS and carry off the treasures.

Great skill & imagination are required to play this excellent game & you may still never exhaust all the possibilities. By devising methods of condensing messages, the author has been able to include many features which would otherwise be available only on much larger computers.

Start your Adventure now — **£8.95**
(+ VAT & 55p P & P)

from:

PROGRAM POWER
5, Wensley Road,
Leeds LS7 2LX.
(Tel. 0532 683186)



**SPECIAL
ANNOUNCEMENT**

Acorn Atom

PROGRAMMER'S TOOL-BOX

A packed 4K EPROM (fits Utility Socket) containing:-

1200 BAUD CASSETTE OPERATING SYSTEM
Visible Load and Save routine

- PLUS**
- *TRACE(X) — controlled execution, line no. display
 - *STEP — single step execution
 - FIND — any string of chars. in program
 - VAR — list variables
 - LVAR — print variables
 - AUTO X,Y — automatic line numbering (any start, any step)
 - RENUMBER X,Y — any start, any step
 - DELETE X to Y — any range to line nos.
 - (*VIA chip required) HEX — Hex and ASCII Dump.
 - IHEX — Hex Dump in Instruction format.
- PLUS Additional BASIC statements**
- READ DATA & RESTORE
 - KEY X — scans keyboard-input to variable
 - INKEY \$X — scans keyboard-input to string variable
 - IF... THEN... ELSE
 - WHILE... ENDWHILE
 - CURSOR X,Y — position cursor as required
 - ON ERROR
 - BEEP X,Y — sound a note-any duration, any pitch
 - ZERO — zeroes all basic variables
 - POP — close out sub-routine
 - STOP — Useful debugging instruction.

Suitable for any memory size. Greatly enhances the Atom's existing facilities.

Real Value at £24.50 + VAT & 25p P&P

5, Wensley Road, Leeds LS7 2LX
Tel. (0532) 683186

Send S.A.E. for details
& full catalogue.
(State Atom)

**PROGRAM
POWER**



COMPUTER USER AIDS

**** ANNOUNCE THEIR OWN UK101 DISK SYSTEM ****

1. Double sided PCB.
2. Cables to and from UK101 and disc.
3. No soldering — ready built.
4. Complete with DOS.
5. Simply add drive.
6. Absolutely NO extras required.
7. Includes PSU as well!

At a price within the reach of everyone: only £143+ VAT (disc drive extra)

- * Orders are now being taken
- * RESERVE your system NOW!
- * Send NO CASH until advised
- * User group members have priority
- * Disc drives at discount rates

SOFTWARE FOR UK101 - ACORN ZX81 - VIC

Send SAE for complete library

SPECIAL OFFER

Fantastic price reductions on ALL Epson and Microline Printers

LOOK — EPSON MX80(T) — £329.00+ VAT
EPSON MX80FT — £359.00+ VAT

With FREE paper with every unit — and discounts go right through the range.
EVEN EPSON MX100 — £529.00+ VAT

**See us at Stand 428
Computer Fair**

BARCLAYCARD AND ACCESS WELCOME

14 CHARLTON ROAD, ROMFORD, ESSEX RM2 5BD. Tel: (0708) 64954

ZX80

JRS SOFTWARE

19 WAYSIDE AVENUE, WORTHING, SUSSEX, BN13 3JU
TELEPHONE WORTHING 65691 (Evenings and Weekends only)

ZX81

16K RAM PACK £35 (469.95)

Fully built, tested and guaranteed
Black case
No 'wobble' problems — fully supported by ZX81
Fully compatible with printer etc., etc.
Full refund if not delighted

(Please allow 14-21 days for delivery)

WHY PAY MORE



An **ESSENTIAL** addition to your 1K RAM ZX81 (or ZX80 8K ROM)
(please state which when ordering)

TOOLKIT (written by PAUL HOLMES)

Provides the following additional facilities:

Line renumber — you state starting number and increment value.
Search and replace — changes every occurrence of a character as you require.
Free space — tells you how many free bytes you have left

SPECIAL GRAPHICS ROUTINES

Hyper graphics mode — graphics never seen on a ZX81 before.
Open — instantly sets up as many empty print lines as you require. (1K version only)
Fill — used in conjunction with OPEN fills your screen instantly with your specified character
Reverse — changes each character on your screen to its inverse video.

TAPE ROUTINE — provides a system **WAIT** condition until a signal is received in the cassette ear jack — many uses!

All these routines are written in machine code and together take up only 164 BYTES of your precious RAM — an incredible achievement!!

The price is incredible too! ONLY **£3.95 (£7.90)** for cassette, including **FULL** instructions and example programs.

ALSO available 16K version ONLY **£4.95 (£9.90)** which includes all the above PLUS: GOTO's and GOSUB's included in line renumber.
Search for and list every line containing specified character.

16K VERSION

CASSETTE professionally recorded by SOUND NEWS STUDIOS

GAMES PACK — Beat this for value! — 5 x 16K programs PLUS 2 x 1K programs **£4.95**

3-D Battle (M/code-1K) — Fast-moving space battle with continuous count-down of energy units left. **(£9.90)**

City Bomb (M/code-1K) — Destroy the buildings and land your plane. Your fuel has nearly gone and you circle the city lower and lower.

Warp Wars (Basic & M/code-16K) — Features realistic space-craft moved by M/code for (previously sold at Microfair with instant response. **£4.95**)
Sweet Tooth for £4.95)

Snake (Basic-16K) — A game of thought and skill. Pass through all the marked squares without crossing or doubling back on your path, but watch out for the expanding black blob.

Sweet Tooth (Basic & M/code-16K) — M/code routines used to move your fat face-round the screen and gobble the sweets.

PLUS Slalom and Black Holes (previously sold together for £4.95)

OVERSEAS CUSTOMERS PLEASE NOTE

Payment may be made in Sterling (Money Order available at your bank) or P.U.S. (U.S.A. customers only).

ALL GOODS SENT AIRMAIL

2 DAY SHOW

3RD ZX MICROFAIR

CENTRAL HALL, WESTMINSTER, LONDON SW1

Friday 30th April 1982 (12.30—8.30pm)

Saturday 1st May 1982 (10.00—6.00pm)

EVERYTHING FOR THE ZX80/ZX81

- The ZX MICROFAIR is a market-place which does for ZX products what your local market does for fruit and veg — it gives you good quality, wide selection and low prices in a friendly, informal atmosphere.
- The show is run by other ZX users at low cost to you and to exhibitors, so you get bigger discounts and the chance to see the small supplier and prototypes as well as leading firms (Sinclair Research will be there).
- The ZX MICROFAIR is the only show EXCLUSIVELY for ZX products and services. You'll be amazed at the wide range — it's a real Aladdin's Cave of software, hardware, books, mags, educational and user groups and all for the Sinclair.

THE BIGGEST SELECTION ANYWHERE

- Choose from hundreds of programs in BASIC and M/C — arcade games, chess/board games, Adventure, educational scientific, business, home finance and many NEW programs.
- Thinking of hardware expansion? See them in action first. Selection of K/Bs, budget memory, I/O, sound, colour, hi-res, graphics, speech, discs, printers and new products all within your price range.
- Bring and Buy Sale, Buffet and Showguide.
- Nearest tube: St. James' Park

LOW PRICE ADMISSION: Adults-60p, Under 14-40p
Under 10s (with mum or dad) Free (they'll answer technical queries)
Advance tickets: (Friday only) Adults-£1, Children-50p
(cheques payable to ZX MICROFAIR) available from:

Organiser: **Mike Johnston, 71 Park Lane, Tottenham, London N17 0HG**
(Apologies if you had to wait to see the last show.
That's why we've made it a two day show!)

· JUST OPENED · JUST OPENED · JUST OPENED ·

· LONDON'S ·
· HOME COMPUTER CENTRE ·

· ACORN ·




· BBC ·



· PET ·



· VIC ·

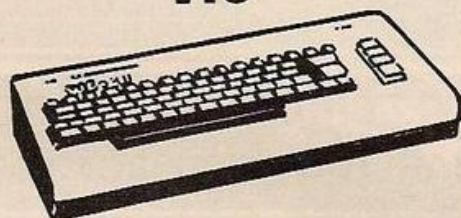

· GAMES · HOME FINANCE · EDUCATION ·
· ALL YOU NEED · ALL EXPLAINED ·

There's a fantastic choice of home computers on the market today. Each one brilliant in its own right. But which one's right for you?

The jungle stops here! At Microstore, we'll understand your requirements and advise you on the best model.

From business or household management, to education or entertainment, there's something for you. Hundreds of items and accessories on display.

Business Computers
Apple II and III

Talk your requirements over with a practical business man. Books, Disks, Printers, Programs, and all the back-up. Also full after-sales-service.

· Come and see them before you buy ·

MICROSTORE

· 327 · KING'S ROAD · LONDON · SW3 ·
· PHONE · 01 · 352 · 9291 ·

MICROSTORE

WHITE ON WHITE

As soon as I had bought my Vic-20, I started to hunt for software for it. The first book I found was *Basic computer games* by D. Ahl. To adapt them for the Vic, I had to give the screen sizes a good deal of thought — imagine what 24K Star Trek would be like with 22 columns — but I should not really have expected anything else.

This left me still needing to find a book written for the Vic. On the shelf of my local computer shop *Getting acquainted with your Vic-20*, by Tim Hartnell, published by Interface, seemed to fit my requirements perfectly. I gladly paid the £5.95 for this small paperback. How wrong I was — after entering just four programs, I realised the mistake I had made.

First, there was Labyrinth: despite correcting the mistakes according to the loose sheet supplied with the book, I still found other programming errors, not to mention the typing mistakes. When run, I obtained a set of jumbled letters that ran from one syntax error to the next. I then entered the version of life. A very important semicolon was missing, causing the program to run off the screen.

Still trying my best to come to terms with this book, I entered Space Raider. The stars and the spaceship were white — perfectly normal, except that the background was also white. Poke 36879,8 rectified this oversight.

By now, I had given up, but a friend of mine decided to enter draughts. There seemed to be terrible problems with his array. However many times I checked the listings I could find no fault on my friend's behalf. The problem seemed to be in lines 5110 and 5150 — the formula was outside the specified range — even though I had changed the mistake given on the extra sheet in line 5150.

In fairness, some of the advice offered by the book is reasonably good, although it occasionally has a flavour of the ZX-81 about it. For example, it mentions that you can use line numbers up to 9999. That may be true for the ZX-81, but for the Vic-20 10000 is perfectly acceptable.

Mike Potter,
Rudlow,
Wiltshire.

ROUGH RESPONSE

I read with real horror the statement made by Tim Hartnell in *Response Frame* in the February 1982 edition under the heading ZX-81 Problems: "Cleaning the contacts very gently with emery paper".

I would like to point out that you should never use emery paper on the printed-circuit board contacts as it can damage and wear away the covering of gold. I have been in

computer engineering for some years and I have always cleaned the contacts with an ordinary ink or pencil rubber which must be grease free.

The way to use it is to rub the rubber over the contacts very lightly and if the rubber is clean of grease and oil, the deposit left will fast blow away.

Ian Wallace,
Enfield Lock,
Middlesex.

SINCLAIR'S SINS

My experience of the ZX-81 supports B Taylor's letter in the February issue of *Your Computer*. From July to November last year I received many assurances and five replacements for my first ZX-81. All these had the well-known fault,

$SQR\ 0.25 = 1.3591409$

together with others, for example:

$SQR\ (0.5 * 128) = 436.7852$

$SQR\ (0.25 * 256) = 436.7852$

$SQR\ (0.125 * 512) = 436.7852$

$1 - 1E-10 = 3$

$1000 - 1E-10 = 1024$

Since the distributing organisation was not able to find me a ZX-81 without these faults, I was informed that the ROM would be replaced. When I received the machine on December 23, after this repair, there was a different set of faults, for example:

$SQR\ 0.25 = 0.46901423$

$SQR\ (0.5 * 128) = 7.5042276$

$SQR\ (0.125 * 512) = 7.8525394$

$SQR\ 4 = 1.8760569$

$SQR\ 64 = 7.5042276$

I returned this ZX-81 on December 31 with, as usual, full details of the faults. I have, to date, received no repair, replacement or explanation; I have been sent an acknowledgement.

I hope D Adamson — see letter in the same issue — is not being complacent and has checked his ZX-81 for arithmetic faults. I question whether the ZX-81 is suitable for use in schools while these faults and others persist.

H Hack,
Henley on Thames.

INFALLIBLE ZX-81

Ian Copestake in *Your Letters*, February 1982, opens with the statement "Computers do not make mistakes? My ZX-81 does —". He should not blame the computer for a program error.

The various points he raises are explained when you realise that the computer works in binary and not decimal, even when decimal is read in it has to be converted to the binary scale. Only numbers which are integral powers of 0.5, such as 0.25 and 0.0625 will give a finite number of digits. All other numbers under unity correspond to recurring series.

Thus, when such numbers are entered into the computer, they are rounded off to fit into the finite

space allocated to storing the number. The program must be written to take this fact into account. The computer may not round off the way that will give the right answer when converted back.

Ian Copestake must have experienced this in line 20 because he wanted the interval to cover the range 0 to 1. If, however, the program had asked this, line 30 would have printed out up to 0.95 because the rounding off meant the numbers involved were slightly higher than needed.

However by increasing the range to a maximum of 1.01 as has been done in the program, the extra term of 1 is printed. If this had been done in lines 60 and 120 the first and third sets would have been completed. So that the evaluations match, you must ensure that the rounding off of the binary is done correctly. That can be done if a similar procedure modification is added to line 200 by writing

$Y = INT(10 * X + 0.01)$.

With regard to the plot statement, which plots to the nearest integer, when a 0.5 is involved the nearest integer is equally likely to be up or down. So, the results obtained are quite consistent. If it is important to always round in one direction, the program must include an instruction which will do this.

C E Stephenson,
Wimborne,
Dorset.

RAM FEEDBACK

With reference to Stephen Adams' recent review of ZX-81 memory extension packs: our 32K RAM pack does run with the standard ZX-81 power-supply unit sold with the machine. Sales of 2,000 of these expansion boards prove this. We are still selling 400 per month. Only 17 extra power-supply units, less than one per cent, demanded by customers.

As for the poor quality of the edge connector, we have changed our supplier. From April, we will be housing our RAM packs in an injection-moulded plastic case, to match the Sinclair ZX-81. The device will no longer suffer from 'wobbling' problems.

Audio Computers,
Southend-on-Sea,
Essex.

■ The ZX-81 power-pack was tried without success on the Audio Ram pack reviewed. As all the power is fed through the edge connector Audio's improvements may solve this.

Audio's own installation notes read: "You might find you tend to lose data after 6pm. This is because the drop in the mains voltage in your area is too critical".

Altering mains power packs is dangerous if you do not know what you are doing, so we did

not recommend this modification to those who did build the kit.

Stephen Adams.

CUBE CORRECTION

The Cubemaster program from February *Your Computer* is the best software-listing I have yet seen for the ZX-81. Unfortunately, a couple of bugs crept in.

Line 550 should read
 $LET\ C\$ = "RBWGYO"$

and in lines 4280, 4290, 4300 and 4310 the space should be taken out five characters back from the edge of the listings, that is the LS, LS, US and US should be closed up in the four lines.

Graham Mitchell,
Bromborough,
Wirral.

SILENT RUNNING

Since submitting the Silent Running program for the March publication I have discovered that the earlier ZX-81s had a faulty ROM which gave an inaccurate value for $.25 ** 2$. Recently Sinclair has modified the ROM to give the correct answer, but in doing so has moved some of the subroutines including the one in my program for initialising the submarine's position CD 19 15.

A book by Ian Logan claims that this routine is moved up the ROM by four bytes and now begins at 15 1D. So if anyone has had difficulty in running this program perhaps they would like to correct the listing for their ZX-81 to read:

16585 CD 1D 15
3E 21
CD 1D 15

S A Nicholls,
Kenysam,
Bristol.

FEMINIST INPUT?

Why is microcomputing a male preserve? There were 13 girls at Surrey's Reigate County in 1956 doing A-level mathematics, and only nine boys at the Grammar school. The very first person to go through our school in 1904, graduated with a mathematics degree 10 years later and taught it until she retired in 1956. The applications of a micro for women are wide.

I am no longer married, but in my experience most women handle the budget, fill in tax forms, rent and rate rebate forms; keep a stock of food, cleaning materials, children's play materials — a list of stock which would make an office manager reel in disbelief.

As soon as I can, I shall write programs, cover all these areas and some for my daughters to use for their needs. Perhaps in a few months I shall write an article entitled "Micros — a feminist input".

Carol Whiteside,
Alfred Road,
London.

Purpose-designed recorder aims to make light of loading

THE ECR-81 is a cassette recorder designed specifically for microcomputers such as the Sinclair ZX-80/81. It is fitted with a long-life head suitable for TDK high-bias Super Avilyn cassette tapes. Output level is preset, eliminating the need for volume adjustment. A write-protect microswitch avoids data loss

through accidental tape erasures.

The controls include fast forward and rewind tape search. Supplied with mains lead, DIN connector and certification tape, the ECR-81 costs £47.50 including VAT from Monolith Electronics Co Ltd, 5 to 7 Church Street, Crewkerne, Somerset. Telephone 0460-74321.



Your fingers will do the running at the computer Olympic games

BRITAIN'S first Olympics to be simulated on computer takes place in conjunction with Apple '82 — the national Apple user convention — at the Fulcrum Centre, Slough, Berkshire, on June 5 and 6. The 10 events feature the 100m., 400m., 1500m., 100m. hurdles, long jump, shot put, high jump, discus, javelin and pole vault. Each competition will be projected on to a giant TV screen using graphics operated from the computer keyboard.

Derek Meakin, chairman of the Apple Olympics organising committee, said: "We have chosen as the ultimate test of skill a multi-game program called Olympic Decathlon. It has been written by a computer genius, Timothy Smith, who has created vividly-animated graphics of athletes whose limb movements are controlled by using either a microcomputer keyboard or the games paddles.

"A good deal of skill is needed. In each event you interact with the animation in real time, which means that every second counts. The current world record for the various events is fed into the computer and points are awarded depending on the time it takes to complete the course or the length of the "throw".

Heats for the computer Olympics will be monitored by computer clubs throughout the U.K. Information about the heats and the finals can be obtained from Derek Meakin, Europa House, 68 Chester Road, Hazel Grove, Stockport, Cheshire, SK7 5NY. Telephone 061-456 8383.



Monitor for Sinclair

A VDU HOUSING designed specially for the ZX-81 has been introduced by Crofton Electronics Ltd. The unit comprises a refurbished 9in. Motorola monitor complete with its own power supply, a full-size QWERTY keyboard and the housing itself.

The keyboard incorporates a video amplifier which allows output to be fed directly to the video monitor. Two 3.5mm. jack sockets are provided for the connection of a tape recorder.

A ZX-81, 16K RAM pack and power supply will all fit inside the housing. A mains terminal block enables customers to use their own power supplies to run the ZX-81.

The housing costs £80 plus VAT with a used cathode-ray tube, or £90 plus VAT with a new tube. Anyone wishing to buy the housing with a ZX-81 already installed will be charged an additional £7.50, and will have to part-exchange his own ZX-81 and power supply.

Crofton Electronics Ltd is based at 35 Grosvenor Road, Twickenham, Middlesex, TW1 4AD. Telephone 01-891 1923/1513.

Tigress has triplets

THE TIGRESS, a triple-processor microcomputer, is being released on to the British market by Tangerine. A disc version running CP/M should be available towards the end of the first quarter of 1982, together with a number of standard CP/M software packages. A non-disc version, costing between £600 and £800, will also be released shortly.

A Z-80A with 64K RAM runs a disc-operating system such as CP/M, with a 6809 chip handling I/O and a dedicated graphics processor. The graphics processor controls a display memory of 96K RAM which is completely programmable.

The 6809 chip is loosely coupled to the Z-80A via a full-duplex eight-bit parallel port. Both the Z-80A and 6809 system buses are available for expansion and the 6809 is compatible with Microtan peripheral boards.

The Tigress will be sold by Tandata Marketing Ltd, Forchill Works, Forchill, Ely, Cambridgeshire, CB7 4AE. Telephone 0353-61161.

Floppy disc for Acorn Atom


ACORN COMPUTER has launched a 5.25in. mini-floppy disc unit for the Atom. Based on the Olivetti OPE FD-501 drive, the unit costs £345 including VAT and gives 92K of storage on a 40-track single-sided disc. The disc controller uses an Intel 8271 chip while the controller card has 4K DOS ROM and 3K static RAM.

More information is available from Acorn Computer Ltd, 4A Market Hill, Cambridge, CB2 3NJ. Telephone 0223-312772.

ZX-81 booklet

THE RAPID Reference Series booklet for the ZX-81 is designed to complement the official manual. It provides details of the ZX-81 keyboard character positions, print co-ordinates, string functions and graphics character set as well as notes on editing and machine code.

The Rapid Reference Series booklet for the ZX-81 costs 55p — postal order or cheque — from Softest, 10 Richmond Lane, Romsey, Hampshire, SO5 8LA.

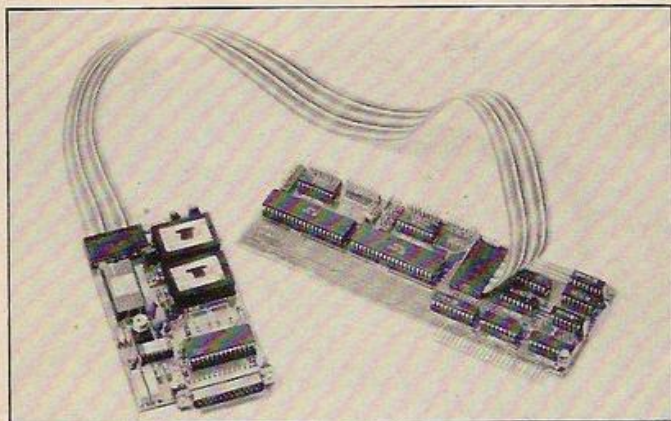

The U-A/D interface card for the Apple II includes an eight-channel high-speed 12-bit analogue-to-digital converter, 16 digital I/O lines and four counter timers. The A/D output is buffered and read into the computer via the control board as two eight-bit bytes. The control board provides eight input channels to the A/D and can also accept 16 single-ended inputs. Comprehensive documentation and sample programs are included. Full details from U-Microcomputers Ltd, Winstanley Industrial Estate, Long Lane, Warrington, Cheshire, WA2 8PR. Telephone: 0925-54117.

Experts and beginners can benefit from summer school

THE LONDON Computer Summer School is offering a series of weekly courses in microcomputing.

The courses are offered at elementary, intermediate and advanced levels to cater for people with all levels of experience. The elementary course should enable the novice to write simple programs in Basic. It covers an introduction to computer programming, variables and storage, simple loops, flow-charting and an introduction to graphics.

The intermediate course covers subroutines and functions, sequential file handling, matrix commands, sorting, graphics and debugging techniques. The advanced course includes Basic dialects, random-access files, structured programming techniques, introduction to assembler and machine-code programming and interfacing with the real world.

Commodore's Vic-20 is used as the standard machine in the school, with one machine for every two students. Each class has a maximum of 16 students and is taught by a qualified lecturer. Trained assistants are available to help students with practical work.

Anyone over the age of 13 can attend the courses, which are held at Middlesex Polytechnic's Trent Park site in Barnet, Hertfordshire. A brochure describing the courses is available from The London Computer Summer School, Mortimer House, 37-41 Mortimer Street, London, W1N 7RJ. Telephone 01-886 4292.

More for school ZX-81s

AVC SOFTWARE is marketing 12 educational programs for the 16K ZX-81. Seven of the programs are part of AVC's Hangman series and cover British geography, biology and physics. Each of these programs has 50 words, phrases or expressions to guess and contains cryptic graphic or verbal clues. These programs are completely idiot-proof, claims AVC.

Other AVC software includes three programs built around a rocket-launch game — the rocket takes off if all the questions are

answered correctly. These countdown programs have three levels of difficulty and cover multiplication tables, English similes and physics exercises.

In addition, AVC offers Angle, which provides practice with a large protractor, Graph, a sophisticated graph-plotting utility, and Madame ZX-81, a fortune-teller for fund-raising events.

More information from AVC Software, PO Box 415, Harborne, Birmingham, B17 0HD.

Software and hardware in U.S. sales and licence agreement

TIMEX IS TO manufacture and market Sinclair's range of microcomputers, peripherals and software throughout the U.S.

Under a new licensing agreement, Sinclair will receive royalties on all sales of its personal computer products in the States. The agreement also covers future developments of Sinclair microcomputers, both by Sinclair and Timex, and the use of Sinclair's own version of Basic.

Sinclair's own U.S. subsidiary will continue to sell the ZX-81 by mail order until Timex sales reach an agreed level. From that point, the Sinclair subsidiary will concentrate on marketing Sinclair's new flat-screen TV, which should be on the market by the last quarter of 1982.

This agreement between Sinclair and Timex extends a partnership which already exists in the U.K. Timex manufactures the ZX-81 at its plant in Dundee, Scotland, where production is currently running at

60,000 units a month, two-thirds for export.

With worldwide sales of the ZX-81 breaking the 300,000 mark in January, and sales of the add-on 16K RAM pack and ZX printer both averaging 10,000 a month, Clive

contained in 150 error texts, but these can be deleted to leave the error codes and additional working memory.

Metanic Comal-80 is available on tape or 5.25in. disc for £100 plus VAT from any MicroValue dealer. Further details and a list of dealers can be obtained from Gemini Microcomputers Ltd, Oakfield Corner, Sycamore Road, Amersham, Buckinghamshire. Telephone 02403-28321.

Courses linked to BBC project

THE MICROCOMPUTER Advisory Centre is offering an introductory course in programming for beginners. Micro enthusiasts will be able to practice on a Pet, Apple, BBC or CP/M machine for £2 an hour. The course will be linked with the BBC/NEC computer-literacy project.

A trial course, including an introductory talk, costs £10 for four hours' computing. Two students sharing a microcomputer are offered twice the time.

The Microcomputer Advisory Centre, which was set up by the South Bank Polytechnic last year, is based at Borough Road, London, SE1 0AA. Course details are available from the manager Jack Flatau. Telephone 01-928 8989, extension 2468.



SEIKOSHA

NEW
WIDER VERSION.
TAKES STANDARD
PAPER.

The Seikosha GP100A
Manufactured by the Seiko Company, Japan.

The micropriced microprinter

80 col dot graphics for around £215^{EX. VAT.}

DEALER
ENQUIRIES
WELCOME

Seikosha introduce the GP100A. A wider and updated version of the highly successful GP80. Now able to take standard width paper, the amazingly compact GP100A offers big printer performance at a fraction of the cost.

With a high quality output that includes full graphics capability, the Seikosha's proven reliability and variety of interfaces make the GP100A the ideal choice for hobbyists, educationalists and businessmen. Full service support is provided by DRG Business Machines' nationwide distributor network.

FEATURES INCLUDE:

- 80 col. 30 cps.
- Dot Matrix unihammer action.
- ACSII standard. 116 characters.
- Full graphics.
- Upper and lower case.
- Double width printing.
- Up to 10" paper width.
- Original + 2 copies.
- Tractor feed.
- Self testing.

INTERFACING for most systems:

- Standard: Centronics.
- Options: RS232C, Serial TTL, 20mA current loop. IEEE-488. Apple II, Sharp (GP100D).

DIMENSIONS:

- Depth - 9¼" (234mm)
- Width - 17¼" (420mm)
- Height - 5¼" (136mm)

OPTIONS:

- Pinch feed.

DRG
BUSINESS
MACHINES

Birmingham: Microcomputers at Laskeys, (021) 6326303. **Bradford:** Eltec Services Ltd., (0274) 491371. **Bristol:** Microcomputers at Laskeys, (0272) 20421. **Chester:** Microcomputers at Laskeys, (0244) 317667. **Edinburgh:** Microcomputers at Laskeys, (031) 5562914. **Frodsham (nr Warrington):** Northern Computers, (0928) 35110. **Glasgow:** Microcomputers at Laskeys, (041) 226 3349. **Leicester:** Kram Electronics, (0533) 27556. **Liverpool:** Microcomputers at Laskeys, (051) 236 2828. **London:** Microcomputers at Laskeys (W1), (01) 636 0845. **London:** C/WP Ltd. (SW1), (01) 828 3127. **London:** Chromasonic Electronics (N19), (01) 263 9493. **Manchester:** Microcomputers at Laskeys, (061) 832 6087. **Preston:** Microcomputers at Laskeys, (0772) 59264. **Sheffield:** Microcomputers at Laskeys, (0742) 750 971. **Watford:** Watford Electronics, (0923) 40588.

DRG (UK) Ltd, Reg No. 22419 England. (Peripherals & Supplies Division)
13/14 Lynx Crescent, Winterstoke Road, Weston-super-Mare, BS24 9DN. Tel: (0934) 416392.

Computer Club is here to encourage you to start your own local computer club or, if one already exists, to join it and become involved. Each month we will devote the page to new ideas from local clubs. We would like to hear of anything which has made a club a success, or of any projects or programs you are developing.

Send for the Orpington micro brigade

ORPINGTON Computer Club has started an associate-membership scheme for micro-computer enthusiasts throughout the U.K. The scheme, which costs £8 a year, allows members to receive the Kent club's newsletter and hardware and software reviews. Yet the scheme's most important benefit is that it allows associate members to make use of the club's technical advisory service.

Microcomputer users with both hardware and software problems can telephone Roger Pyatt, the club's secretary, seven days a week for advice. If Roger Pyatt cannot answer their queries directly, he will refer them to club members who specialise in such problems. Although the scheme only started in January this year, the club has already received enquiries from as far apart as Manchester and France.

The enthusiasts

The associate-membership scheme is designed for microcomputer enthusiasts who are unable to attend the club's weekly meetings.

Orpington Computer Club meets every Friday at 7.45 pm in a small hall at Christ Church, Charterhouse Road, just off the Orpington by-pass in Kent. Meetings are organised on a bi-weekly schedule. In the first week, between 8.00 and 9.00pm, members have a choice between a beginners' course in Basic and working on programs for the club's software project. A practical session follows where the newcomers attempt to put into practice the lessons of the first session. For more advanced members there is a course on Z-80 machine code.

The second week also offers members a choice of activities. In the first session members can either watch or take part in



Brendon Gore finds out why a draughty church hall off the Orpington by-pass attracts some of Britain's keenest hobbyists.

hardware and software demonstrations, or they can work at their own hardware projects such as making keyboards or analogue control ports.

After the refreshment break, there are either more demonstrations, further work on hardware projects or general discussions on programming and hardware tips.

Local society news

Hartlepool

THE HARTLEPOOL Amateur Computer Club held its first meeting at the Welfare Hall for the Blind, Hartlepool, on February 26. The club is looking for new members and will welcome anyone who is interested in computers. Full details from the secretary, David Jones, 11 McDonald Place, Hartlepool, Cleveland. Telephone (Hartlepool) 71020 or 66001 after 6.30pm.

BBC Micro User Group

BEEBUG, the recently formed independent user group for the BBC Micro, is launching its own newsletter in April. Devoted exclusively to the BBC Micro, the first issue will contain hardware and software tips, advice on upgrading the basic model, program listings for three-dimensional noughts and crosses and

Moonlander and an advice clinic to answer reader's questions. Membership costs £4.50 for six months or £8.50 for one year. For further details send a stamped, addressed envelope to Beebug, 35 St Julians Road, St Albans, Hertfordshire.

Aylesbury ZX Computer Club

THE AYLESBURY ZX Computer Club is designed to help members make the most of their Sinclair computers. The club has a library of software, books and periodicals, and provides a forum for the exchange of ideas, programs and hardware. Guest speakers and informal "teach-ins" cover a range of topics from machine code to members' own four-line programs. Membership costs £5 a year, or £2.50 for under-17s and over-65s. More information from Ken Knight. Telephone 0296 27446 during office hours.

A monthly newsletter, compiled by chairman Richard White, is distributed free to all members. Reports on some of the latest software and hardware are available for 25p, to cover postage and packaging.

Norman Lambert, head of the club's software group, is putting together an index of software programs.

The club's software reviews consist of a brief description of the program and how it works. The program's packaging, documentation, loading, on-screen instructions, facilities, ease of use, programming technique and usefulness are assessed on a scale from 0 to 10. Members are encouraged to write their own programs.

BBC referral service

Orpington Computer Club is also providing a referral service for the BBC Microcomputer. New and prospective owners of the BBC computers will be directed to the Orpington club.

Most of the club's 40 ordinary members own ZX-80/81s. Other machines owned by club members include a modified Nascom, a TRS-80 and a Superbrain. Richard White has a BBC Microcomputer on order.

The club has established a close relationship with the local branch of W H Smith. Club members help out on Saturdays, demonstrating the ZX-81 and answering technical questions. This benefits both parties, as it provides the staff at W H Smith with a back-up service and provides the club with a source for new members.

The club was only formed in May, 1981, but its credentials are well established. The entertainments officer at Bognor Regis, West Sussex, has contacted the club, asking for advice on how to set up a computer club.

Anyone wishing to join Orpington Computer Club, either as an ordinary or associate member, should write to the secretary, Roger Pyatt, 23 Arundel Drive, Orpington, Kent.

REVIEW

VIC ADD-ONS

Tim Hartnell tests an array of Commodore Vic add-ons which in many cases seem to be as remarkable for their high quality as for their high prices.

THERE IS A bewildering variety of add-ons available for the Vic-20; from a motherboard to U.S. cassette-based software, from joysticks to light-pens. Overall, the standard is good, but most products are marked by one characteristic — a very high price. For example, a cassette of two games — Code-maker and Code-breaker — imported from America retails for £14.95, and Commodore's — in my view very boring — fruit-machine program, Super Slot, sells for an incredible £19.95.

For those who have never used a Vic, connection is simplicity itself. The instructions in the manual are clear, and I immediately obtained a steady picture, with good colour, on exactly the same channel tuning used for my ZX-81 and Atom. The first picture you see tells you how much free memory is available — slightly less than 4K with the standard machine.

Additional cost

The computer costs £189, with the Commodore cassette player an extra £45. The Vic-20 demands its own, special cassette player, which adds to the cost of the basic unit. On the positive side, however, the reliability of Load/Save using the dedicated recorder is as good as any I have seen, including the Atari, and much better than the ZX-81. My only complaint about the computer is the irritatingly short video lead.

The Vic-20 dot-matrix printer produces a clear printout of programs. All colour commands and graphics are reproduced directly, which makes listings easy to read and re-enter. This tractor-feed printer offering 80 characters per line, 30 characters per second, costs around £230, and while very noisy, is a robust, reliable unit.



There are a variety of ways you can add memory to the Vic. At the bottom of the range is the 3K plug-in pack, which gives the user a total of 64K for £40.25 — an example of the high prices. This memory board allows the Vic to move the Basic and begin at 1024 — 0400 — as in the Pet, and makes possible the use of high-resolution in colour graphics.

A 19K memory expansion is available for £198 which has 16K battery-protected so that it will store programs for up to a year after turning the computer off. It incorporates a 4K removable module which has its own battery back-up circuit. There are many more memory options available in two device types:

NMOS for lower cost, and CMOS for lower power drain. Each type is offered in three memory sizes with or without a switchable 3K RAM in the lower address space. The CMOS units cost £82 for 8K, £103 for 8K plus 3K, £124 for 16K, £146 for 16K plus 3K, £167 for 24K, and £184 for 24K plus 3K.

Currah Computer Components of Hartlepool has produced a 220M mini-digital recorder which you can use with the Vic-20. The 220M is a non-volatile data storage system based on the Philips mini-digital cassette recorder. It is fully compatible with 6502-based micros, including the Vic. The machine features a read/write speed and data integrity comparable to discs at a fraction of the cost, and you would probably find use for it if you needed a good deal of memory — up to 64K per side, in fact — where access time was not critical.

The unit makes use of 21 extra Basic commands — such as NF "name" for New File, and KF "name" for Kill File — to

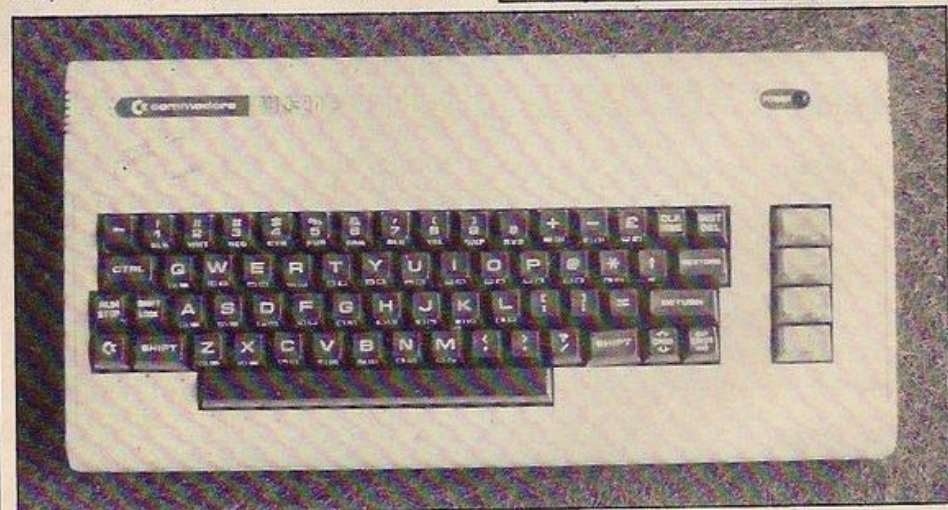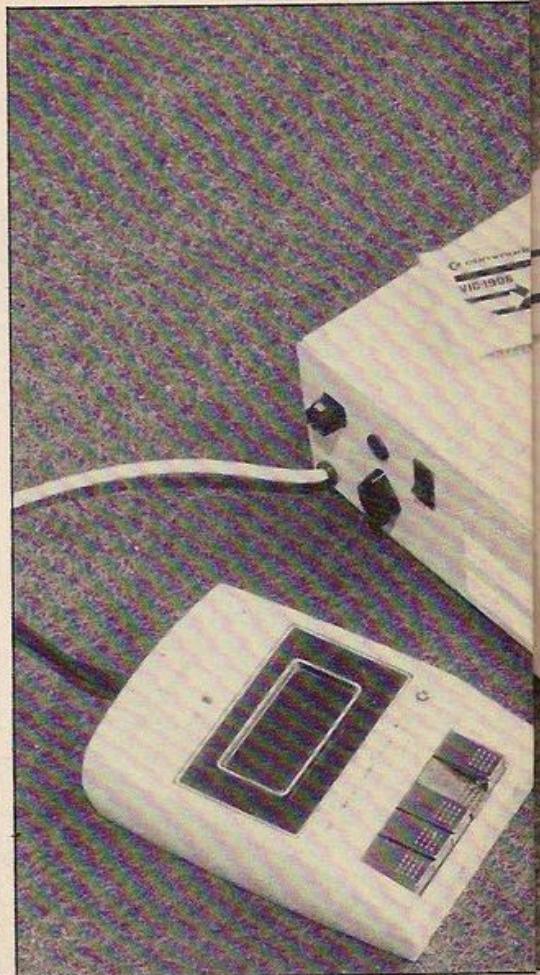

control the functions of the tape. Although conventional tapes are not renowned for high reliability, the Currah 220M, when I tested it, seemed to store data with 100 percent accuracy. Further information on the unit is available from Currah on 0429-72996.

Easy to program

The light-pen, which costs between £25 and £30, works in the normal and high-resolution modes on the Vic, allowing interaction with the Vic without using the keyboard. It is relatively easy to program, and after a little practice, effortless in operation. You can use the touch-sensitive "enter" contacts to prevent putting information into the Vic via the pen by accident.

At around £15 each, and resembling Tandy units, the joysticks must be bought as a single,

or as a pair. Two singles will not work as a pair unless modified.

I extensively tested four Commodore games cartridges which — like the memory — plug in at the back of the Vic on the right-hand side. Due to some design quirk, the slot at the back is larger than the cartridge, which means that a considerable amount of manipulation of the cartridges is necessary to fit them into place. Once that is done, there are no problems.

All four cartridges tested had a screen-adjust feature when first booted up, so you could use the cursor keys to position the picture exactly where you wanted it. The cartridges are attractively packaged with coloured pictures and two or three pages of instruction each. Despite their high price of £19.95, many Vic owners are sure to find they are a good investment.



Your task in *Superlander* is to set down successfully a very odd-looking spacecraft on the surface of a pock-marked planet. The simplest site is worth two points, the one with the middle degree of difficulty five points, and there are 10 points if you manage to land in the most difficult spot. The game is good to play, as the response from the function keys is immediate. The key f1 is for maximum thrust, f2 for medium and f3 for low thrust; the A key moves lander to the right, and D moves the craft to the left. The reaction of the spacecraft gives a good simulation of a body moving in space. It is extremely difficult to play.

In a number of games, I managed to land only once without exploding, and even then it was just on the easiest site — my landing was not good enough to gain bonus points. A frustrating game to play, and one in which you would probably lose interest once you had mastered it.

As with the other programs, the sound effects seemed to have been added as an afterthought. The graphics on all the packs tested were superb, but the sound generally consisted of one or two subroutines which were called endlessly during the game.

Worst cartridge

Super slot, a fruit machine with very good high-resolution graphics, was, in my opinion, the worst cartridge of all. You have no influence whatsoever on the outcome of the game; there are no hold or nudge facilities; all you can do is enter C for coin for each direction you wish to be a pay-off, and then press P to start the game. Interestingly, this game is the one which was demonstrated on

the Vic seen in the first program on the BBC's *Computer Programme*. Fortunately for Commodore, the game was not examined closely, and the sound was turned off.

In *Alien*, you fight off a number of little red beasts, who pursue you around a maze of green slabs. You have three minutes of each game in which to find and destroy all the aliens, which you do by burying them when they fall into holes you have cleverly dug. You have three lives, and the P, L, . and ; keys move you around the maze; the A digs holes and D fills them in. It is a good game to play, and one which I would have liked more time to master. This and *Superlander* tie, in my opinion, for equal second place of the four cartridges tested.

High-score feature

Avenger, — an almost standard Space Invaders — is far and away the best. Better-than-average use of sound enlivens a version of the pub favourite. The high-score feature encourages repeated plays, and as you spend longer with the program, you are rewarded by gradually improving your skill.

There are three types of aliens, worth 10, 20 and 30 points each, with the mothership appearing amid much bleeping on the loud-speaker once or twice a game. The mothership is worth a different number of points each time it is hit. You win a bonus laser base if you manage to top 1,500 points. This game is a good one to play with the joystick.

Arfon Micro produces the Vic Expansion Unit, which incorporates a new, more robust power supply, motherboard with seven cartridge sockets, and a 24V output for the

Arfon Printer. The cassette port and disc port are still totally usable, as are the joysticks. The modulator is held neatly at the rear of the expansion board.

All this is splendidly packaged in an aluminium shell which fits behind the Vic-20, allowing a monitor to sit on top of the unit. Arfon produces 3K, 8K and 16K RAM cartridges, as well as cartridges for music, speech and a clock. Total memory can be increased to nearly 30K with the Expansion Unit.

For about £50, you can use this interface to enable your Vic to drive a Qume daisywheel or a paper-tape puncher. The interface contains a power unit which can double the Vic's ability to support add-ons. It also has an external socket to allow the supply voltages +5V, +15V, -15V to be used for other devices such as the light-pen or printer.

Low-cost interface

For less than half the price of this unit, there is a low-cost, bi-directional RS-232 interface which is configured as a conventional pin-out to a 25-way D-type connector.

The £40 ROM Switchboard plugs directly into the memory expansion port to allow you to call up to four ROMs. It is particularly useful with the Vic toolkit — a £30 chip which gives the Vic programmer access to a similar set of commands as provided by the Pet toolkit, including Append, Auto and Renumber.

There is a whole range of additional Vic products available, such as a £18 port adaptor cable, a user-port splitter, a £33 games port multiplexor, which connects to the games port of the Vic and multiplexes pot X and pot Y lines under software control to allow multiple joysticks to be used. The range of cassette tapes seem expensive at £14.95 each: Codebreaker/Codemaker; Seawolf/Trap/Bounce-out and Monster Maze/Maths Hurdler. There are three books for the Vic owner: Nick Hampshire's *Vic Revealed*, which costs £10; *Learn Computer programming with the Commodore Vic*, by L R Carter and E Huzan for £1.95 and my own *Getting Acquainted With Your Vic-20*, £5.95.

CONCLUSIONS

- It is unfortunate that the prices of Vic add-ons and software seem higher, in some instances, than similar products for other computers of a similar price range. This may well be due to the slightly smaller market that the Vic enjoys compared with other computers in its class.
- The Vic is — apart from the broad graphics — an exceptionally well-designed machine, which invites programming experimentation.
- The value of the Vic is undoubtedly enhanced by the range of products now available for it.
- The computer and additional products were provided for this review by Adda Computers Limited, The Vic Centre, 154 Victoria Road, Acton, London, W3.

BUG-BYTE

SOFTWARE

ZX81

ATOM

ZX81

ADVENTURES

UTILITIES

GAMES PACKS

OTHERS

EDUCATIONAL

| | |
|-----------------------------------|--------|
| The Damsel and the Beast..... | £6.50 |
| Dictator | £9.00 |
| House of Gnomes | £7.00 |
| Startrek | £5.00 |
| ZXAS Assembler | £5.00 |
| ZXDB Disassembler/Debugger..... | £6.50 |
| RENUM Renumbering program | £4.00 |
| Program Pack 1 (1K) | £3.50 |
| Program Pack 2 | £3.50 |
| Program Pack 3 (1K) | £4.50 |
| Program Pack 4 | £4.50 |
| Program Pack 5 | £4.50 |
| Program Pack 6 | £4.50 |
| Program Pack 7 | £5.00 |
| Constellation..... | £8.00 |
| Whist..... | £4.00 |
| Multifile..... | £17.50 |
| Invaders..... | £4.00 |
| 1K Breakout..... | £4.50 |
| Videograph..... | £7.50 |
| Tables teaching and testing | £6.00 |

See us at Stand V16
Computer Fair

ATOM

| | | |
|--------------|-----------------|-------|
| CHESS | 12K | £9.00 |
| 747 | 12K FP | £8.00 |
| INVADERS | 12K | £8.00 |
| GALAXIAN | 12K | £8.00 |
| BREAKOUT | 4K | £4.00 |
| PINBAL | 6K | £4.50 |
| STAR TREK | 12K FP | £5.00 |
| LABYRINTH | 12K FP | £7.00 |
| BACKGAMMON | 8K | £7.00 |
| LUNAR LANDER | 12K | £5.50 |
| GOLF | 6K FP | £5.00 |
| DISASSEMBLER | 4K | £4.00 |
| TYPIST | 6K | £4.00 |
| LAST RUN | 7K | £3.00 |
| 2K PROGRAMS | 1, 2 & 3 (each) | £4.50 |

FP = FLOATING POINT ROM NEEDED

BUG-BYTE

SOFTWARE

B.B.C. MICRO VIC

BBC MICRO

SPACE WARP

The ultimate Star-Trek game — High resolution colour graphics, sound, real time. Probably the most sophisticated Trek type game available.

Supplied on cassette together with a 16 page manual, command reference chart and function key labels. For model B BBC Micro — Price £11.50.

BACKGAMMON

Standard Backgammon game for both model A & B. Fast computer responses. Playing instructions included. £8.00

THE BEEBON

A new magazine devoted exclusively to users of the BBC Micro, containing tested programs, features on programming, hardware, etc., reviews and much more. At least three substantial programs in each issue, written by professional programmers. Published every two months starting in May. Annual subscription (6 issues) £7.50.

VIC

VICMEN (For the unexpanded VIC)

£7.00

ANOTHER VIC IN THE WALL (Breakout-unexpanded VIC)

£7.00

VICGAMMON (3K expansion)

£7.00



ACCESS/BARCLAYCARD ORDERS ACCEPTED
ON 24-HOUR SERVICE ON 051 227 2642



All prices inclusive.

Dealer discounts available.

PLEASE SUPPLY:

NAME:

ADDRESS:


I ENCLOSE A CHEQUE/P.O. FOR:

OR, PLEASE DEBIT MY ACCESS/BARCLAYCARD NUMBER:

SIGNATURE:

BUG-BYTE, 100 THE ALBANY, OLD HALL STREET, LIVERPOOL L3 9UP

ADVENTURE

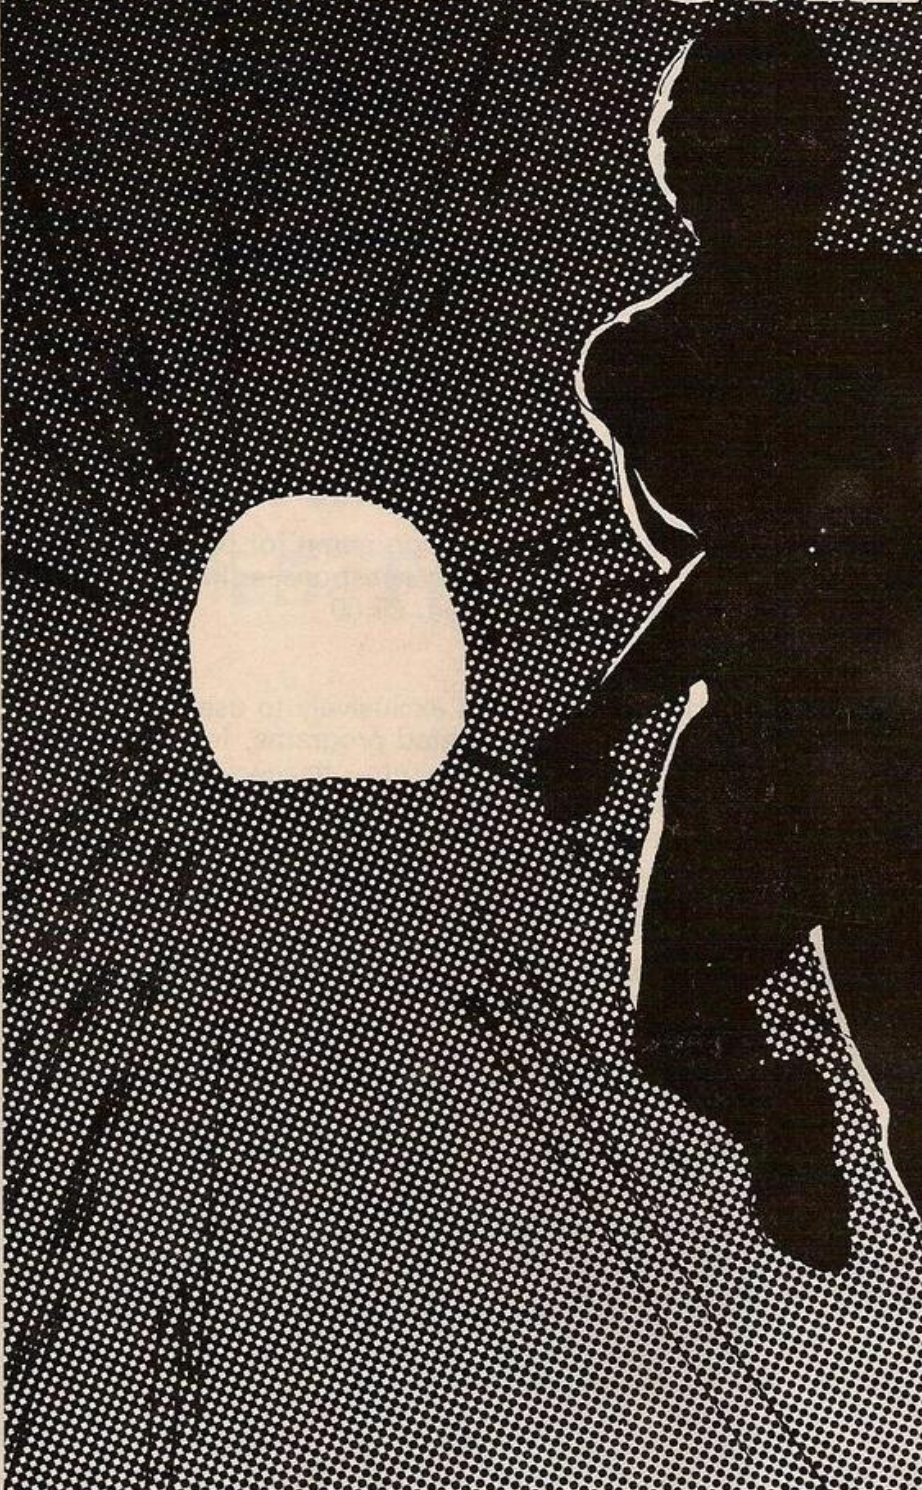

Adventure is the most popular microcomputer game. Although bought Adventures satisfy most appetites, many prefer to "grow their own". Graham Thomson provides budding Adventure authors with a complete Adventure kit for the ZX-81, enabling them to populate the computer world with their own demons.

IN THE DECEMBER 1981 issue of *Your Computer* my article on ZX-81 strings attempted to show how programs can be made more flexible by using the functions Code and CHR\$ to build lists and chains in a Dimensioned string. That article ended by saying that one example of the use to which I had put the techniques was a general-purpose Adventure program. Here is that program.

All Adventure games have the same fundamental structure. By means of one- or two-word instructions to the computer, the player moves from place to place in the Adventure

scene — which may be a magic cave with a maze of passages and caverns, a haunted house with many rooms and corridors, or an ancient city with houses, alleys and winding streets.

As you move from one place to another, the computer prints a description of the place you have reached, and the directions, north, south, east, west, top or down, that you can travel from there. At some of the places there are objects — treasure, keys and weapons. Some are useless; some score points if you can carry them back to a base; some are needed to pass obstructions placed in your path — locked doors and monsters, for example.

Thus, to make a general-purpose Adventure program the minimum requirement is a program to which we can describe:

- The places.
- The links between places — north, south, east, west, up or down.
- The objects and where they lie.

The program must recognise key words and take the correct action. For example, north means move from the current place to wherever, if anywhere, we reach by travelling north. "Get keys" mean pick up the keys and carry them. "Drop keys" means drop the keys at this place — if you are carrying them.

The Adventure-writing kit should, therefore, include the facility to build a dictionary of words and associated line numbers for the routines to process.

These are the basic functions of the program, so let us look at the program itself which is in ZX-81 Basic. First, the main variables:

O\$(5000) is the string in which the descriptions of objects and places, and the list of words are built. Figure 1 shows the format of an entry describing a place. Figure 2 is the format for an object entry and figure 3 for a word entry.

O\$(31) holds the two-byte binary indices which lead into S\$ for the object entries. The index to object number O is

$$256 * \text{CODE}(\text{O} \div 2) + \text{CODE} \text{ O} \div 2 + 1$$

So the first byte is unused and there is space for 15 objects.

P\$(101) holds the two-byte binary indices which lead into S\$ for the place entries. The index to place P is

$$256 * \text{CODE}(\text{P} \div 2) + \text{CODE} \text{ P} \div 2 + 1$$

As with O\$, the first byte is unused, so there is space for 50 places.

F is the next free byte pointer in S\$. This is initialised to 3, because the first two bytes of S\$ are reserved: S\$(1) is unused; S\$(2) is the number of the first object being carried.

S accumulates points scored for reaching given places or for carrying treasure back to base.

W1 is the address — the index in S\$ — of the first word entry, or head of chain. W2 is the index to the last word entry, or the tail of the chain.

P is the number of the current place.

IP is the index into S\$ of the current place entry.

Z\$, X\$ and Y\$ are used to input and process the commands. Z\$ is the full command, X\$ the first word, Y\$ the second word.

O is an object number.

IO is the index to the object O.

The main sections of the program are:

10 to 530: initialisation. They control the definition of the game, and start the game.

1000 to 1220: the main control for the game — they input and analyse the commands.

1400 to 1440: the subroutine to assist in command analysis by finding the next space in the command.

1500 to 1751: the subroutine to search the word chain for a match with X\$ — it accepts the first four characters as a match — and then returns with L set to the line number for processing this word, or with L set to zero if the word is not in the list. Lines 1720 to 1751 vary the response to an invalid command.

2000 to 2240: they handle the move from one place to another — the commands north, south, east, west, up or down.

2300 to 2330: these lines handle the Stop command which halts the game.

2350 to 2430: handle the Save command which suspends the game. Note that line 2340 is the entry for a Save during initial set-up of the game.

2500 to 2540: handle the Help command.

2800 to 2930: handle the Drop command.

3000 to 3120: handle the Get command which picks up objects.

3200 to 3220: handle the Score command.

3300 to 3360: handle the List command which reminds you what you are carrying.

4000 to 4180: during the set-up of game, these lines handle definition of a word and the associated line number.

4500 to 4830: during set-up, these lines handle definition of an object.

5000 to 5295: during set-up, these lines handle definition of a place.

5300 to 5350 and 5500 to 5700: the subroutines for defining descriptions and scores for places and objects.

5800 to 5820: set IP.

5900 to 5920: set IO.

6000 to 6170: the subroutine used by Drop and Get to move an object from the chain of objects being carried to

the chain of objects at this place, or vice versa.

6500 to 6690: search the chain of objects being carried, or, at this place, for the one named in Y\$.

6700 to 6780: print the long description for this place — P and IP.

6800 to 6830: print the short description for this place.

6900 to 7020: print the list of objects at this place, or being carried.

To set up a new Adventure game draw a diagram of your network of places, allocating a number to each place. Use number 1 for the home base — the place to which treasure must be brought to gain points. This does not need to be the starting point for the game.

Then decide which objects are involved and where they are to be at the start of the game. If you want to introduce any special words, write the code to handle them — the line numbers after 7020 are available for this purpose. The code for each special word must finish with Return. If you need to Print any messages, remember to Scroll first.

When you run the program, you will see a request asking what you want to do next — the options are:

- Places: define places.
- Objects: define objects.
- Words: define words.
- Go: start the game.
- Save: save what you have so far to cassette.

Select the Words option and define the following words and associated line numbers.

| Word | Line to Goto | |
|------|--------------|-------|
| N | 2000 | North |
| S | 2020 | South |
| E | 2040 | East |
| W | 2060 | West |
| U | 2080 | Up |
| D | 2100 | Down |
| Get | 2800 | |
| List | 3300 | |
| Help | 2500 | |
| Look | 6700 | |
| Save | 2350 | |
| Stop | 2300 | |

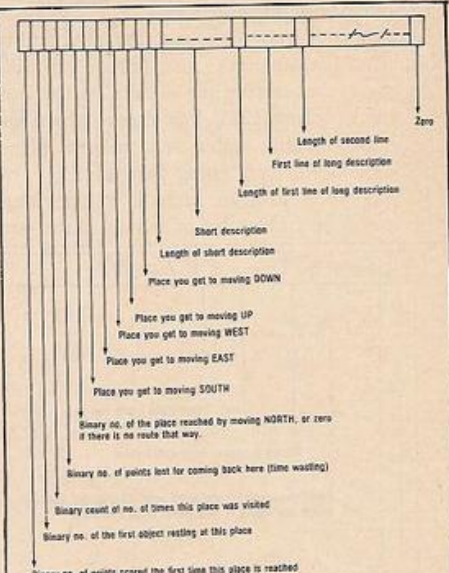


Figure 1.

Indicate the end of the list of words by entering 99. It is a good idea to select the Save option now so that you do not have to re-enter this fixed list of words for every game you define. After the Save, you can then reselect Words and continue defining any special words of your own. Note that you can make the game more friendly by including synonyms — say, both North and "N".

The order of entry of the words is the order of the search during command analysis, so put the most commonly-used ones first, as shown.

Then select the Places option, and define your network. This option asks for the place number, a short description of the place, a long description, a score — which is the number of points gained for reaching this place — the number of points lost for returning to it, and the numbers of the places reached by going N,S,E,W,U or D.

(continued on next page)

```

10 DIM S$(5000)
20 DIM O$(31)
30 DIM P$(101)
40 LET S$(1 TO 2)=" "
50 LET F=3
55 LET S=0
60 LET W1=S
65 LET W2=S
70 CLS
75 PRINT "F IS :F"
80 PRINT "WHAT NEXT?"
90 PRINT "PLACES,OBJECTS,WORDS,GO,SAVE"
100 INPUT Z$
110 IF Z$="PLACES" THEN GOSUB 5000
120 IF Z$="OBJECTS" THEN GOSUB 4500
130 IF Z$="WORDS" THEN GOSUB 4000
140 IF Z$="GO" THEN GOTO 500
145 IF Z$="SAVE" THEN GOSUB 2340
150 GOTO 70
500 PRINT "WHAT IS THE STARTING PLACE NO."
510 INPUT P
520 GOSUB 5800
530 GOSUB 6700
1000 INPUT Z$
1010 SCROLL
1020 PRINT Z$
1030 LET X$=""
1040 LET Y$=""
1050 IF Z$="" OR Z$=" " THEN GOTO 1000
1060 LET I=1
1065 LET Z=LEN Z$

```

```

1070 GOSUB 1400
1080 LET X$=Z$(1 TO K-1)
1090 LET I=K
1100 IF I>Z THEN GOTO 1200
1110 IF Z$(I)<>" " THEN GOTO 1140
1120 LET I=I+1
1130 GOTO 1100
1140 GOSUB 1400
1150 LET Y$=Z$(I TO K-1)
1200 GOSUB 1500
1210 IF L>0 THEN GOSUB L
1220 GOTO 1000
1400 LET K=I
1410 IF Z$(K)=" " THEN RETURN
1420 LET K=K+1
1430 IF K=Z THEN GOTO 1410
1440 RETURN
1500 LET I=W1
1510 LET J=LEN X$
1520 LET L=CODE S$(I+4)
1530 IF L<>J THEN GOTO 1550
1540 IF S$(I+5 TO I+4+L)=X$ THEN GOTO 1600
1550 IF J<4 OR L<4 THEN GOTO 1570
1560 IF S$(I+5 TO I+8)=X$(1 TO 4) THEN GOTO 1600
1570 LET I=256*CODE S$(I) + CODE S$(I+1)
1580 IF I=0 THEN GOTO 1710
1590 GOTO 1520
1600 LET L=256*CODE S$(I+2) + CODE S$(I+3)
1700 RETURN
1710 LET L=0
1720 LET I=INT (5*RND+1)


```

(listing continued on next page)

(continued from previous page)

The short description is one line only, and is limited to 21 characters. The long description is as many lines as you like — indicate the end of it, by entering End. For those directions which are invalid, enter zero as the place number you reach by going that way.

It is a good idea to include in the long description an indication of which routes are

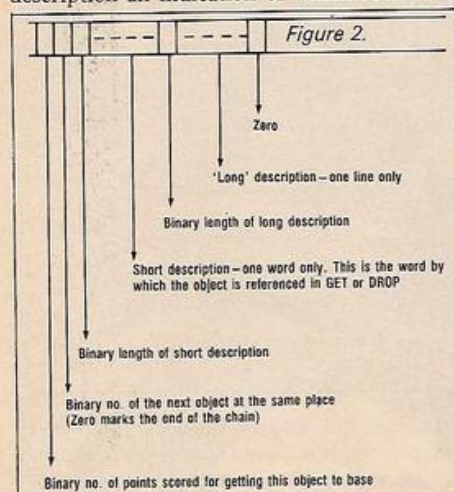


accessible. When you have finished entering place, reply 0 to the "Place no.?" prompt.

Now select the Objects option and define your objects. This option asks for the object number, a short description of one word only, a long description of one line of up to 32 characters, the score for carrying it back to base, and the initial place number for the object. When you have defined all the objects, enter 0 in reply to the "Object no.?" prompt.

When you now select the Go option, the program asks for the starting place number, prints the description, and waits for a command. When you have completed all that, enter Save so that the program copies itself on to the cassette. Whenever you reload your game, it will not start automatically by printing the description of the starting location.

As the game progresses, the long description is printed for the first time a place is reached. Thereafter, any return to the same place produces the short description.

You may want to build further program code to trap certain actions. For example, dropping fragile objects, or moving into dark places without a torch. Intercept points are

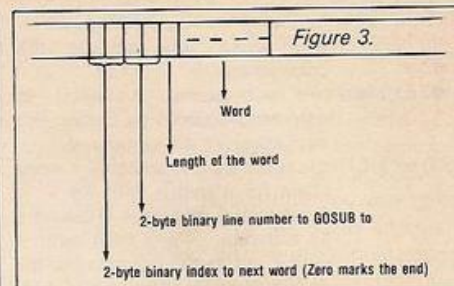

indicated in the listing by Rem statements:

```
2135 A — you are about to move from
      place number P to place number I.
2200,2220 B1,B2 — you must intercept at both
      — you have just arrived at place
      number P.
2890 C — you are about to Get object O.
3090 D — you are about to Drop object O.
```

In the cases of the "about to move, get or drop", if your additional code executes a Return, the action is cancelled. Otherwise your intercept code must end with a Goto on the line after the intercept. Activate your code by overwriting the Rem with a Goto.

The program leaves you slightly more than 4K on the 16K ZX-81 for your own code, or you could increase the sizes of S\$, O\$ and P\$.

(listing continued from previous page)

```
1730 SCROLL
1740 GOTO 1740+2*I
1742 PRINT "WHAT?"
1743 RETURN
1744 PRINT "SORRY, I DON'T UNDERSTAND THAT"
1745 RETURN
1746 PRINT "TRY ANOTHER WORD"
1747 RETURN
1748 PRINT "EH?"
1749 RETURN
1750 PRINT "WHAT DO YOU MEAN?"
1751 RETURN
1999 REM MOVE N,S,E,W,U,D
2000 LET I=4
2010 GOTO 2110
2020 LET I=5
2030 GOTO 2110
2040 LET I=6
2050 GOTO 2110
2060 LET I=7
2070 GOTO 2110
2080 LET I=8
2090 GOTO 2110
2100 LET I=9
2110 LET I=CODE S$(IP+I)
2120 SCROLL
2130 IF I=0 THEN GOTO 2230
2135 REM INTERCEPT A
2140 LET P=I
2150 GOSUB 5800
2160 LET A$=CHR$(CODE (S$(IP+2))+1)
2170 LET S$(IP+2)=A$
2180 IF A$=" " THEN GOTO 2210
2185 LET S=S+CODE S$(IP+3)
2190 GOSUB 6800
2200 REM INT. B1
2205 RETURN
2210 GOSUB 6690
2215 RETURN
2220 REM INT. B2
2230 PRINT "SORRY, YOU CAN'T GO THAT WAY"
2240 RETURN
2300 SCROLL
2310 PRINT "OK. USE CONT TO RESTART"
2320 STOP
2330 GOTO 6700
2340 LET X$="INIT"
2350 SCROLL
2360 PRINT "SETUP THE TAPE; TYPE NAME TO USE"
2370 SCROLL
2380 PRINT "START TAPE; TYPE NEWLINE"
```

```
2390 INPUT A$
2400 SAVE A$
2410 CLS
2420 IF X$<>"INIT" THEN GOTO 6700
2430 RETURN
2500 SCROLL
2510 PRINT "ALL I CAN DO TO HELP IS REPRINT"
2520 SCROLL
2530 PRINT "THE DESCRIPTION OF THIS PLACE."
2540 GOTO 6700
2800 IF Y$<>" " THEN GOTO 2840
2810 SCROLL
2820 PRINT "GET WHAT?"
2830 RETURN
2840 GOSUB 6520
2850 IF O=0 THEN GOTO 2890
2860 SCROLL
2870 PRINT "I SEE NO ";Y$
2880 RETURN
2890 REM INT. C
2895 GOSUB 6030
2900 IF R=0 THEN GOTO 2860
2904 IF P=1 THEN LET S=S+CODE S$(10)
2910 SCROLL
2920 PRINT "OK"
2930 RETURN
3000 IF Y$<>" " THEN GOTO 3040
3010 SCROLL
3020 PRINT "DROP WHAT?"
3030 RETURN
3040 GOSUB 6500
3050 IF O=0 THEN GOTO 3090
3060 SCROLL
3070 PRINT "YOU HAVE NO ";Y$
3080 RETURN
3090 REM INT. D
3095 GOSUB 6000
3100 IF R=0 THEN GOTO 3060
3110 IF P=1 THEN LET S=S+CODE S$(10)
3120 GOTO 2910
3200 SCROLL
3210 PRINT S
3220 RETURN
3300 LET O=CODE S$(2)
3310 SCROLL
3320 IF O=0 THEN GOTO 3350
3330 PRINT "YOU AREN'T CARRYING ANYTHING"
3340 RETURN
3350 PRINT "YOU HAVE : "
3360 GOTO 6950
4000 CLS
4005 FOR I=1 TO 10
```




```

4010 PRINT "WORD?";
4020 INPUT A$
4025 PRINT A$
4030 IF A$="99" THEN RETURN
4040 IF A$="" THEN GOTO 4020
4050 IF W1=0 THEN LET W1=F
4060 IF W2=0 THEN GOTO 4090
4070 LET A=INT (F/256)
4080 LET S$(W2 TO W2+1)=CHR$ A+CHR$ (F-256*A)
4090 LET S$(F TO F+1)=" "
4100 LET A=LEN A$
4110 LET S$(F+4)=CHR$ A
4120 LET S$(F+5 TO F+4+A)=A$
4125 PRINT "LINE NO. TO GO TO?";
4130 INPUT N
4135 PRINT N
4140 LET B=INT (N/256)
4150 LET S$(F+2 TO F+3)=CHR$ B+CHR$ (N-256*B)
4160 LET W2=F
4170 LET F=F+5+A
4175 NEXT I
4180 GOTO 4000
4500 CLS
4510 PRINT "OBJECT NO.?";
4520 INPUT O
4525 PRINT O
4530 IF O<=15 THEN GOTO 4560
4540 PRINT "TOO HIGH"
4550 GOTO 4510
4560 IF O<=0 THEN RETURN
4565 LET IO=F
4570 LET G=F
4580 LET A=INT (G/256)
4590 LET O$(2*O TO 2*O+1)=CHR$ A+CHR$ (G-256*A)
4600 LET F=F+2
4700 GOSUB 5500
4710 LET S$(G+1)=CHR$ O
4770 PRINT "1ST PLACE FOR IT?";
4780 INPUT P
4790 PRINT P
4800 GOSUB 5800
4810 LET S$(2)=CHR$ O
4820 GOSUB 6000
4830 GOTO 4500
5000 CLS
5010 PRINT "PLACE NO.?";
5020 INPUT N
5023 PRINT N
5025 IF N<=50 THEN GOTO 5030
5026 PRINT "TOO HIGH"
5027 GOTO 5010
5030 IF N<=0 THEN RETURN
5035 LET G=F
5036 LET A=INT (G/256)
5037 LET P$(2*N TO 2*N+1)=CHR$ A+CHR$ (G-256*A)
5040 LET F=F+10
5050 GOSUB 5500
5170 PRINT "LOSE 2ND?"
5180 INPUT A
5190 LET S$(G+3)=CHR$ A
5200 LET S$(G+1 TO G+2)=" "
5220 LET A$="NSEWUD"
5230 CLS
5240 PRINT "PLACES YOU GET TO?"
5250 FOR I=1 TO 6
5260 PRINT A$(I);
5270 INPUT A
5275 PRINT A
5280 LET S$(G+3+I)=CHR$ A
5290 NEXT I
5295 GOTO 5000
5300 PRINT A$
5310 LET L=LEN A$
5320 LET S$(F)=CHR$ L
5330 LET F=F+1+L
5340 LET S$(F-L TO F-1)=A$
5350 RETURN
5500 PRINT "SHORT DESCRIPTION?"
5510 INPUT A$
5515 LET F1=F
5520 GOSUB 5300
5530 PRINT "LONG?"
5540 INPUT A$
5550 IF A$="END" THEN GOTO 5590
5560 IF A$="" THEN GOTO 5540
5570 GOSUB 5300
5580 GOTO 5540
5590 PRINT "DO YOU WANT TO RETYPE ABOVE?"
5600 INPUT A$
5610 IF A$(1)="N" THEN GOTO 5640
5620 LET F=F1
5630 GOTO 5500
5640 LET S$(F)=" "
5650 LET F=F+1
5660 PRINT "SCORE?";
5670 INPUT A
5680 PRINT A
5690 LET S$(G)=CHR$ A
5700 RETURN
5800 LET IP=P*2
5810 LET IP=256*CODE P$(IP)+CODE P$(IP+1)
5820 RETURN
5900 LET IO=O*2
5910 LET IO=256*CODE O$(IO)+CODE O$(IO+1)
5920 RETURN
5999 REM DROP
6000 LET I=1
6010 LET K=IP
6020 GOTO 6050
6029 REM GET
6030 LET I=IP
6040 LET K=1
6050 LET A$=CHR$ O
6060 LET R=0
6070 LET B$=S$(I+1)
6080 IF A$=B$ THEN GOTO 6130
6090 IF B$="" THEN RETURN
6100 LET J=2*CODE B$
6110 LET I=256*CODE O$(J)+CODE O$(J+1)
6120 GOTO 6070
6130 LET S$(I+1)=S$(IO+1)
6140 LET S$(IO+1)=S$(K+1)
6150 LET S$(K+1)=A$
6160 LET R=1
6170 RETURN
6500 LET IO=1
6510 GOTO 6530
6520 LET IO=IP
6530 LET O=CODE S$(IO+1)
6540 IF O=0 THEN RETURN
6550 GOSUB 5900
6560 LET L=CODE S$(IO+2)
6570 LET A$=S$(IO+3 TO IO+2+L)
6580 IF L>LEN Y$ THEN GOTO 6610
6590 IF A$=Y$ THEN RETURN
6600 GOTO 6530
6610 IF LEN Y$<4 THEN GOTO 6530
6620 IF A$(1 TO 4)=Y$(1 TO 4) THEN RETURN
6630 GOTO 6530
6690 LET S=S+CODE S$(IP)
6700 SCROLL
6710 PRINT "YOU ARE IN:"
6720 LET I=IP+CODE S$(IP+10)+11
6730 LET L=CODE S$(I)
6740 IF L=0 THEN GOTO 6900
6750 SCROLL
6760 PRINT S$(I+1 TO I+L)
6770 LET I=I+L+1
6780 GOTO 6730
6800 SCROLL
6810 PRINT "YOU ARE IN ";
6820 LET L=CODE S$(IP+10)
6830 PRINT S$(IP+11 TO IP+10+L)
6900 LET IO=IP
6910 LET O=CODE S$(IO+1)
6920 IF O=0 THEN RETURN
6930 SCROLL
6940 PRINT "THERE IS HERE : "
6950 GOSUB 5900
6960 LET I=IO+3+CODE S$(IO+2)
6970 LET L=CODE S$(I)
6980 SCROLL
6990 PRINT S$(I+1 TO I+L)
7000 LET O=CODE S$(IO+1)
7010 IF O=0 THEN RETURN
7020 GOTO 6950

```


INTERVIEW MARKETING

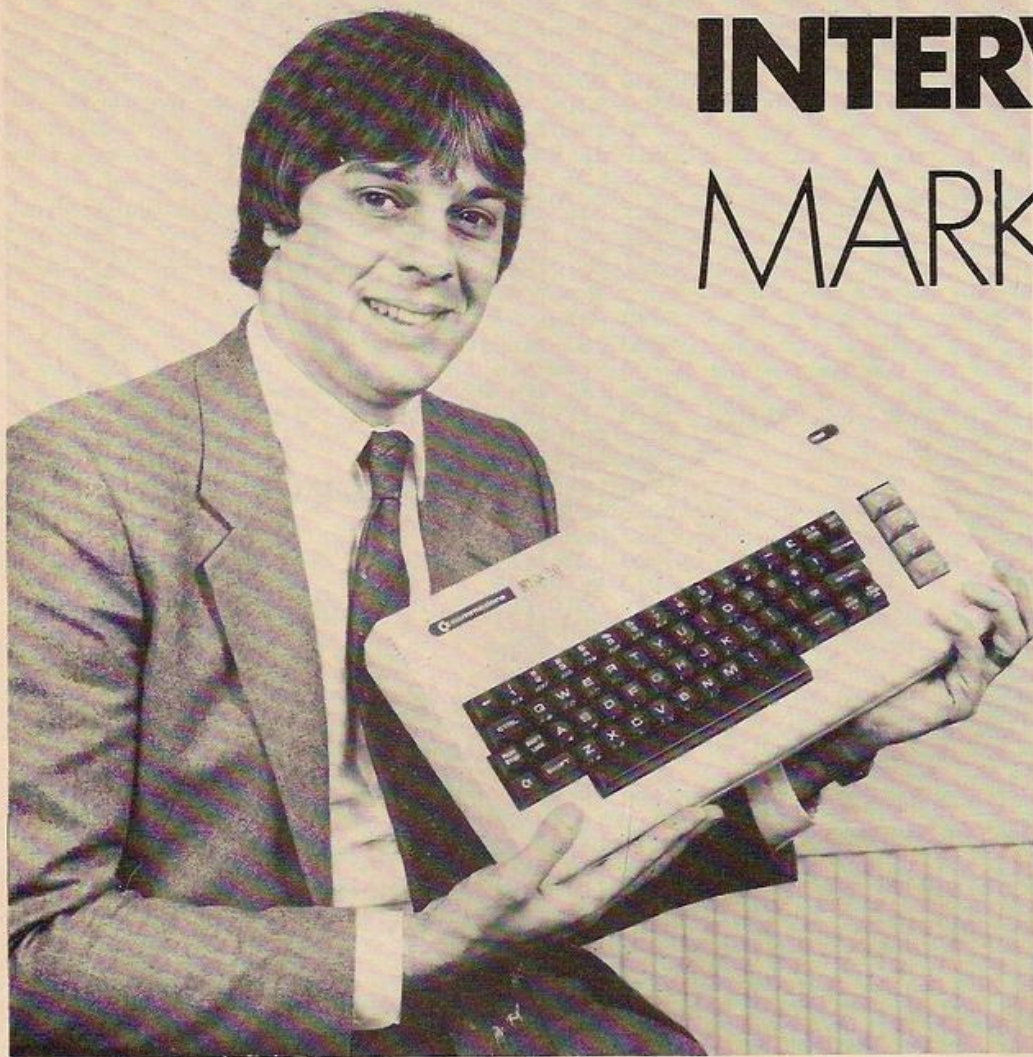

As the Vic-20 hits the U.K. market in volume, Brendon Gore talks to John Baxter, Commodore's marketing manager. More than anyone, he will decide when we will be able to buy the new Vic-40 and Ultramax micros.

MICROCOMPUTERS are a relatively new subject for John Baxter, Commodore's U.K. marketing manager. He started work as a management trainee for IPC, the periodical publishers, in the magazines department. During his stint at IPC he looked after a range of publications including the *Eagle* of Dan Dare fame, *New Musical Express*, *New Scientist* and *New Society*.

John Baxter then moved on to an advertising agency, Chetwynd-Haddons, before joining Whitbread as group marketing manager for the soft drinks division. Yet despite spending seven years with Whitbread, handling everything from Pepsi Cola to R White's lemonade, he felt that he wanted more of a challenge.

"I had a wonderful job at

Whitbread and I have no complaints about the company at all, but in the end I didn't find soft drinks exactly the most exciting market in the world", says Baxter.

An approach to Commodore led to an interview with Kit Spencer, Commodore's former general manager. The result was a switch from soft drinks to microcomputers.

"I don't claim to have any significant computer awareness of computer knowledge", says John Baxter. "I don't know how a chip works, I only know what it does. I'm not a programmer by any means, I've only learnt a smattering of Basic since I've been here, but I joined Commodore because I wanted to get into this kind of high-technology development area".

John Baxter's move to Commodore coincided with the company's plans for launching the Vic-20 on to the U.K. market. Unlike the Pet, the Vic-20 was aimed at the home and particularly the first-time user. It is still too early to judge its success, but the initial response has been encouraging.

In some ways the market for home computers is comparable to that for video recorders, explains Baxter. Price is often a determining factor. "About 10 years ago, when video machines cost between £1,500 and £2,000, the only people who bought them were businessmen and indus-

trialists. As video recorders became cheaper, a few more people began to buy them, but when the price hit about £500 the market really took off.

"There is a certain price-break on most new, high-technology

'Digital recording means more accurate loading'

products, which is linked to demand. As soon as the price reaches that break-point, the product is transformed from a specialist article to a general consumer good. The same thing will apply to computers.

"Sinclair has proved that if you can produce a product at a certain price, the market is there", says Baxter. "I understand from Sinclair that he tried his microcomputer at various prices and it didn't sell, but when he reached about £70-£79 the market took off".

The Sinclair ZX-81 is an excellent way of entering the computing market", says Baxter. "But people quickly tire of its limitations. Research carried out by Commodore indicated that 73 percent of Sinclair owners had exhausted the possibilities of their machines and were

looking for something else", he claims.

"We believe they are looking for colour, sound, high-resolution graphics and a proper keyboard. They are looking for a unit which can be truly expanded, with floppy-disc drives and proper printers, so they can do elementary word processing and simple business applications. I don't claim the Vic-20 is a business micro because it is not, but it is capable of being expanded into a sophisticated machine".


Commodore is currently involved with a TV company which is making a programme about the use of microcomputers in the home. The TV company selected 12 families at random and gave each of them a Vic-20. The programme, which will be shown nationally, is charting their progress.

"The interesting thing is that they have only had the computers for two weeks, but already eight of those 12 families have asked us if they can buy the Vic-20s from us.

"I really do believe that microcomputers will be the boom consumer electronics consumer good of the eighties. I can see, certainly by the end of the eighties, that virtually every home will have a microcomputer. I don't think that is being optimistic, I think it is almost certain to happen".

One of the problems faced by first-time users is that microcomputer manuals are often inaccurate and badly written. This is not a deterrent for the experienced programmer, but it can be very offputting for the beginner, acknowledges Baxter.

"We have produced a manual for the Vic-20 which is aimed at the first-time user. The manual adopts a simple, show-and-tell approach, which is designed to explain what you can do with the machine, how

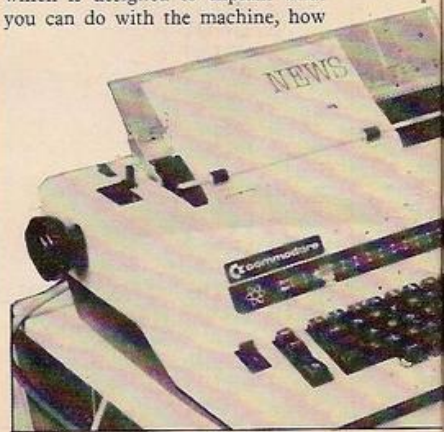

COMMODORE'S WARES

you can generate colours, sounds and, pictures. If anything, we have been criticised for making the manual too simple.

"I won't deny there are some minor errors in the manual, but we are correcting them. We had 10 to 15 people, who never used a computer before, go through the manual with us and point out the problems.

"One of the obvious difficulties is that a computer needs to know the difference between 0 and O and between 1 and I. This has to be explained because many people who see a program that says line 10 often use the O instead of the 0. Another problem is that some people don't know that upper and lower case

containing 17 programs and a stencil for writing flowcharts. The complete package costs £14.95.

The training package is intended not only to teach people how to program, but also to teach them good programming techniques, says Baxter. "Although it's wrong, many people write programs straight on to the screen and correct their mistakes as they go along. That is not the way to write a computer program.

"*An Introduction to Basic: Part 1* explains how to write a good program. It talks about subroutine specifications, parameters, input/output and flowcharting".

Commodore has sold more than 30,000 of the training packages, both in the U.K. and abroad. John Baxter is proud of the fact that no errors have been reported, so far: "In all we had about 10 people checking, both for literals and programming errors, and we haven't found one mistake yet. There is bound to be one somewhere, but we actually typed in every single program once the proofs were done, so there are certainly no major errors".

An Introduction to Basic: Part 1, which was written for Commodore by Professor Andrew Colin of Strathclyde University, is being followed by part 2 which will cover advanced Basic and machine-code programming. "Part 2 is just being finalised", says Baxter, "and parts 3 and 4 are both being worked on.

"We expect to sell a large amount of Part 1, a significant amount of Part 2 and a much lower amount of Part 4. We don't really expect to sell much of Part 4, but we want to give people the opportunity to progress from being absolute novices to being

'People quickly tire of the ZX-81's limitations'

able to write the most complicated machine code programs".

Commodore is also encouraging people to buy its own cassette recorder for saving and loading programs. "The trouble with using audio machines is that they vary a good deal", says Baxter. "If you are playing a music tape and the head is slightly out of alignment it won't make much difference; but if you are trying to load a computer program it will have disastrous consequences.

"You will still be able to write and save your own programs on a recorder with a badly-positioned head, because the recorder will recognise its own wavelength, explains Baxter. But that recorder won't pick up a pre-recorded program with a normal wavelength. This can cause confusion.

"People will say there is something wrong with our cassette and send it back. We will check it and tell them there is nothing wrong with it, and suggest that perhaps there is something wrong with their recorder.

"Our own cassette recorder is specially geared to the Vic-20 and should enable people to avoid most of these problems. In addition, we are giving away a cassette which contains six different programs with each recorder".

In a bid to minimise saving and loading problems, Commodore is using an innovative method of recording its programs. "In the past, virtually everyone used audio recording equipment to record computer programs", says Baxter. "But we are using a digital recording technique which is far more accurate.

John Baxter acknowledges that this digital recording technique also boosts the chances of users successfully loading Commodore cassette programs using their own recorders. But he warns that digital recording on its own will not solve all saving and loading problems: "There are thousands of different cassette recorders and there is bound to be something funny about some of them which don't like the computer programs".

A few Commodore dealers, such as Stack Computers of Liverpool, supply interfaces to enable Vic-20 users to connect their own recorders into their computers, reveals Baxter. "We have no objections to people doing that kind of thing, but if they do get into difficulties they must realise that it's no longer our problem".

Vic-20 software is just starting to take off, says Baxter. "It is only when computers get into people's homes that the software starts to flood in, and we only started shipping Vics in quantity in December. The software is coming in fast now, but it is always difficult to decide which ones to back. We do encourage other people to market as much software as they can.

"We have five ROM games cartridges of our own which are out now and another 12 which are due to be launched over the next few weeks. Of those, the one that I think will become the biggest seller is the Adventure series which we have had done in conjunction with Scott Adams in the States".

'By the end of the 1980s, every home will have a micro'

refers to capital and non-capital letters".

Yet the Vic-20 manual is not designed to teach first-time users how to program. Instead, Commodore U.K. has produced a training package *An Introduction to Basic: Part 1*. The package consists of a 152-page book, two cassettes



April 23-25, 1982
Earls Court, London

Friday & Saturday: 10am – 6pm
Sunday: 10am – 5pm

Admission £2.00 adults
£1.00 children under 16.

THE Computer Fair

Personal computers
Home computing
Small business systems

The computer is with us and soon to be as familiar in the home as your television, video or hi-fi. But much more versatile!

A home computer can be the family's resident teacher, accountant, home economics expert, memory bank and endless source of amusement! It can do anything you programme it to do – from teaching mathematics to the children or computing the most economic use of household fuels for yourself, as well as providing hours of fun on a rainy afternoon. Most important of all, the home computer will teach you and your family about computers – and this is the technology that your children are growing up with.

In the office, the personal computer is rapidly replacing the obsolete mound of box files, adding machines and notebooks on thousands of desk tops. Microchip streamlining means increased efficiency in hundreds of different fields.

Sponsored by:
Practical Computing and
Your Computer



**HALF PRICE
ADMISSION
VOUCHERS**

Bringing computers to everyday life

Come and see the ZX81 Village

At The Computer Fair you can see and compare an enormous range of personal and home computers. Find out what they can do and which one would suit you best. Talk to the experts and discover for yourself how much – or how little – you need to spend. Choose from an amazing abundance of software programs and packages, cassette units, VDU terminals and scores of computer games.

Swap your views and know-how with hundreds of other home computer enthusiasts – and find out a whole lot more from computer professionals.

Plus – The Micro Mouse Contest.

Come and watch the incredible ingenuity of computer controlled "mice" and how they find their way (or not!) to the centre of a maze. The knockout heats and the Euromicro British Final can all be seen at The Computer Fair!

Bring the whole family – don't miss this opportunity of bringing computers into your everyday life.



for readers of
**YOUR
COMPUTER**



To expand your micro to control joysticks, speech input, an 80-column printer or even floppy discs, you will need an additional piece of hardware called a port. Stephen Adams conducts this survey into ports available for the Sinclair machines.

A PORT is the gateway through which information enters and leaves a computer; a good example is the cassette port. The information is stored within the computer in eight bits, which form a byte. The maximum amount of bits that can be taken in and out of a port is also a byte.

Each bit on a port is represented by one wire, which will either have +5V, which equals binary 1, or 0V, which equals binary 0. Thus by putting a number between 255 and 0 into the port we can change the conditions on the eight wires. Of course, on an input port the external conditions will cause the eight input wires to be either +5V or 0V. Each port can control, say, relays or printers by operating them from the output port and checking the condition returned by the equipment connected to the input port.

Address locations

The first facts to look for in the literature which accompanies the port are the addresses. These show how the port should be set before trying to input or output any information. There are two places where an address for a port can be located: in memory, like a RAM location. This is called memory mapping. The second place is a special input/output map which the RAM cannot use. On memory-mapped ports the data can be Peeked and Poked just like a piece of RAM, using the Sinclair Basic command. To enter data through the port, you would use the Input command:

```
10 LET PORT = PEEK LOCATION
```

Equally, to output data:

```
20 POKE LOCATION, NUMBER.
```

Table 1 shows the various ports tested and the memory locations in either the input/output map or the memory map.


When the ports are not memory-mapped, one needs to write a small piece of machine code to replace the Peek and Poke commands of Basic. Peek and Poke can be stored in one of two places: high memory, above the RAMtop variable, or in a Rem statement, at the beginning of the program. Two manufacturers offered only one of these locations; William Stuart and JMJ.

Machine-code programs have been written by all the manufacturers for accessing their ports, but only one, Thurnall, expected you to write your own after being told how to address the port. The others gave an address in which to Poke and output, and offered a USR address for moving data in and out of the port. USR returns with a value in register BC which is used to return the input value of the port given. For example,

```
LET A = USR X
```

leaves the value of BC in A.

Where a control port is used, it must first be

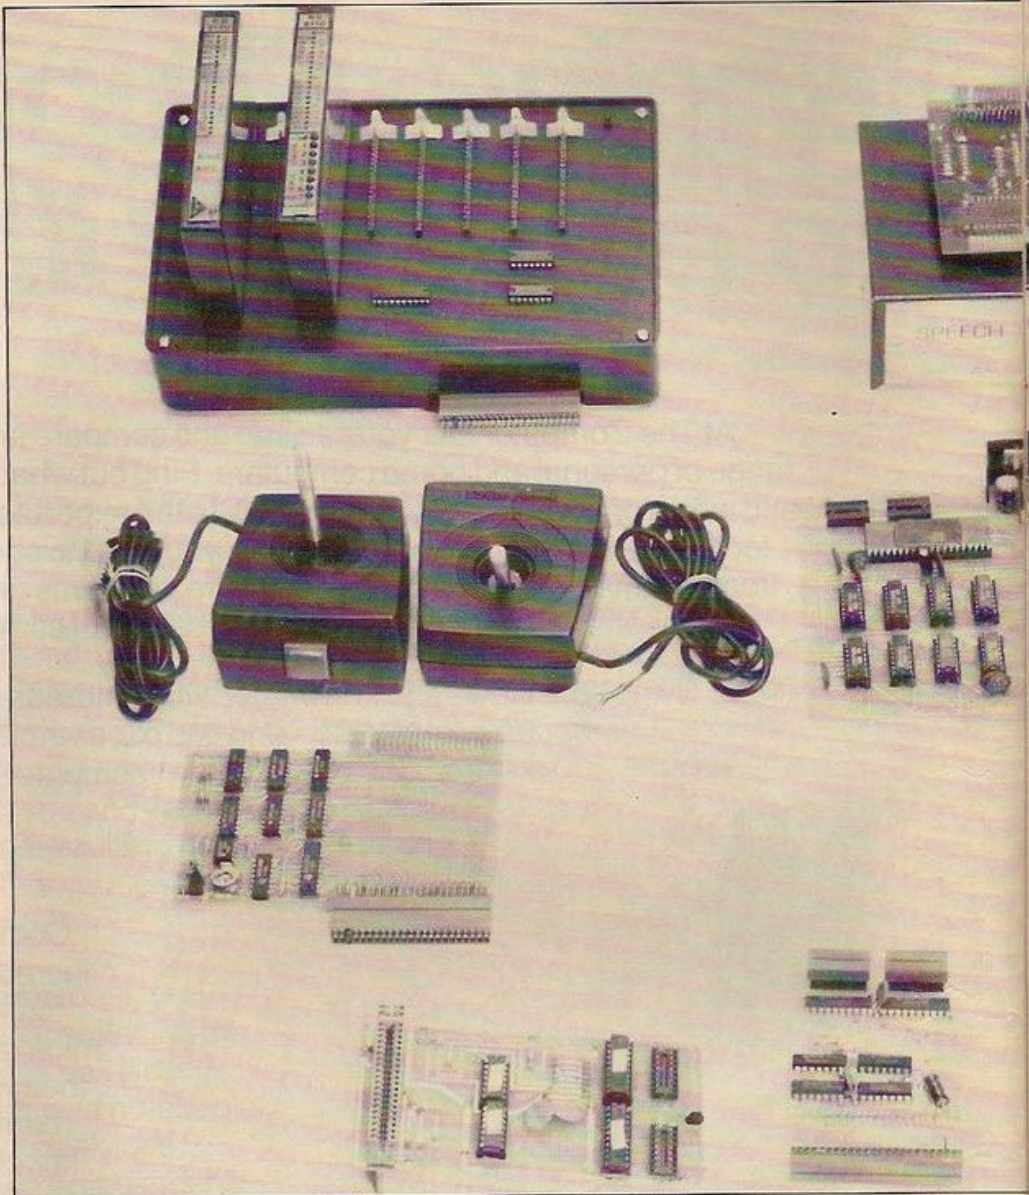

SURVEY ZX PORTS

set up. You do this by outputting a number to the control port to tell it which port is to be for input and which output. Also, with Quicksilva and William Stuart ports, which use a combined input/output and music-generation chip AY-8910, the control register must be told which port to look at, since only one of the two ports can be input or output at one time.

The way ports are addressed can also give rise to problems since Sinclair-designed equipment is sometimes inaccurate. Some of the memory-map addresses are decoded by only one or two address lines instead of the complete 16 available. This leads to a reduction in the number of chips required for each unit, but leaves the device to appear a number of times in the memory or input/

output map; it should appear only once.

Three devices failed a functional test with the Sinclair 16K RAM pack and printer connected to the system as well as the port. William Stuart clashed with the printer which only uses A2 to activate itself. JMJ clashed with the keyboard, which uses A0, and the slow mode, which uses only A0 and A1.

Potential problem

On the ZX-80, however, the Technomatic's port works at location 25000 thus leaving only 7K of memory space for RAM. If, therefore, you have a 16K RAM on a ZX-80 with 8K or 4K ROM, this port can cause problems. It is advisable to ask yourself, if you buy extra memory or ports, whether they will clash.



Power supplies can also cause problems, since all these extras are mostly driven from the ZX-81 9V or 5V supplies. Table 2 shows the extra current required by the ports. Two ports were supplied with sockets for alternative power supplies. Their ground controls must have a second power supply otherwise the RAM on board will not work.

Another potential problem is the number of boards connected directly to the ZX-81 expansion port. The ZX-81 may not be able to supply any of the boards because the load is too great. The only board to solve this and the power supply problem is RD Laboratories 8100 system which is fully buffered on the Address and Data lines. JMJ and DCP solve this problem by blocking off the expansion port on the ZX-81 so that only the printer can be used.

All of the units functioned well, apart from the clashes mentioned. The few that are available as kits should cause no problems to construct. The instructions are, however, somewhat scant, and so you should have some experience of building with integrated circuits.

There is, however, one word of warning: the output of all of the ports is only +5V maximum which is only enough to supply

| Manufacturer | Read | Write | Address variation | Input/Output | Memory map |
|------------------------|---------------------|-------|-------------------|--------------|------------|
| Ground Control A | 49155 | | 0 | | ✓ |
| B | 49152 | | 0 | | ✓ |
| C | 49152 | | 0 | | ✓ |
| Control | 49154 | | 0 | | ✓ |
| 16K RAM | 16384-32767 | | 0 | | ✓ |
| Bolton Electronics | 65535-65532 | | 0 | | ✓ |
| | selection strap | | | | |
| Technomatic | 11000 | | 256 | | ✓ |
| Thurnall | | | | | |
| A | 111 | | 0 | ✓ | |
| B | 127 | | 0 | ✓ | |
| C | 79 | | 0 | ✓ | |
| D | 95 | | 0 | ✓ | |
| William Stuart Systems | | | | | |
| Control | 195-219 | | 0 | ✓ | |
| Data | 199-233 | | 0 | ✓ | |
| | by straps | | | | |
| Micro Gen | 15376-16384 | | 1K | | ✓ |
| DCP | | | | | |
| Port | 21504-22272 | | 1K | | ✓ |
| RAM | 16384-21248 | | 0 | | ✓ |
| Quicksilver Control | 32767 | | 0 | | ✓ |
| Data | 32766 | | 0 | | ✓ |
| RD Laboratories | | | | | |
| System 8100 | 15360-15567 | | 0 | | ✓ |
| | selection by straps | | | | |
| | 14 addresses | | | | |
| | per module | | | | |
| JMJ | | | | | |
| Control A | 2 | | Unknown | ✓ | |
| Data A | 0 | | as unit | ✓ | |
| Control B | 3 | | sealed | ✓ | |
| Data B | 1 | | | ✓ | |

Note: Some of the port addresses given for the ZX-81 cannot be used on the ZX-80. Alternative addresses are: Bolton, -1 to -4; RD-8100, 31744 to 31951; Technomatic, 25000; Ground Control, -16384 to -16381.

Table 1.

current to drive one logic chip in most cases. So, to control relays or mains voltages from the output port, extra equipment must be used to cope with higher voltages and current. Any voltage higher than +5V or lower than -0V will damage the port if applied to its input.

Concrete examples

Most of the documentation tells you what marvellous applications are possible, but few actually give concrete examples. Technomatic's must be one of the better examples — with the port are 14 pages of circuit diagrams describing things to do with the input and output. Some manufacturers do more and supply you with extra equipment which will plug into the port to allow it to control higher voltage, via relays or measure voltages via an analogue-to-digital converter.

The award for the best application must go to Micro Gen which supplies its port for only one purpose — to control two joysticks, so you can program their use.

Most ports have the same amount of data available on input and output, so that external equipment can be modified to fit the board and only the program has to be changed to use it. One application project which will fit any

port is the speech-input device called Big Ears from William Stuart Systems. It requires only the use of bit 7 and bit 6 of an input port. Other interfaces can be designed to run a proper 80-column printer, a Modem — although the software will have to cope with the parallel-to-serial conversion — and even a floppy-disc system.

Among the units available is the analogue-to-digital and digital-to-analogue converter from DCP, called an A pack. It converts a voltage from 0V to 2.5V into a byte-sized number on the input port. The digital-to-analogue converter does the opposite, but the current supplied is not great; accuracy is ± 5 percent.

The DCP relay output pack can switch up to 12V 1A. Called a C pack, it also has the inputs held to binary 0, which is opposite to normal.

The RD Laboratories RD-8110 is a logic input and output port with light-emitting diodes for quick identification of the output state. The RD-8130 is an eight-bit analogue-to-digital converter whose comparison voltage can be varied by links. The RD-8180 is a light-pen system for drawing on the screen.

The Bolton Electronics port is a good design

(continued on next page)

(continued from previous page)

as it stops the RAM-pack wobble by laying the 16K on the table and raising the ZX-81 45° upwards. There is provision for four more boards on the same system through the use of different straps. However, it will not work with any RAM greater than 15K. It costs £15.90 built or £12.90 as a kit plus £1 postage and packing.

The port from DCP Micro Developments is a good system for schools with 4K of RAM included in the basic P pack and the single port. It is sufficiently tough, supplied in its own black box, and the Molex pins are well spaced, and so will not be easily broken. The A and C packs can make it more versatile, but only one can be connected at a time.

The problem with this system is that it is hard to expand, it will not work with the 16K RAM pack and other packs cannot be connected to the ZX-81 because the P blocks the way. The output of the C and A packs is via 2mm. Wander sockets. The cost of the basic P port is £37.95 and the A pack, £19.95; the C pack costs £29.95. Both C and A packs must be used with a P pack.

The Ground Control port has 16K of RAM and a three-port input/output device on one board. The port is a 8255 P/O and the data sheet will only be supplied in return for a stamped, addressed envelope. The output is via two 14-pin integrated-circuit sockets, and the edge connector for the ZX-81 is supplied at a cost of £3.20 extra. It also requires a separate 200mA 12V power supply to be connected to the board which can be supplied at an extra cost of £6.

The black blobs

This board must be mounted in a case — it is hazardous to use it without one. You will have to put up with black blobs occasionally on the screen at switch-on because of the power supply. The cost of the board is £47 for the ready-built version and £42 for the kit.

The JMJ Interfaces ZX-81 User Port Module is enclosed in a black blob of epoxy resin. This Z-80A P/O module is supplied with a book of interface instructions for the control of relays and the sensing of light and heat. All the connections to the P/O are available on a 24-pin integrated-circuit socket moulded into the case.

It has no extension connector and so it blocks off any other use for a 1K machine, including the 16K RAM pack. It also clashes with the keyboard port and slow mode on the ZX-81. The cost is £29.

The Micro Gen joystick port has two analogue-to-digital converters which can connect to two converted Tandy joysticks for use in games. The use of it in a Basic program is so simple. In a machine-code program you must wait 0.5ms. for it to obtain its result.

Each joystick is calibrated in two directions between 27 and 14, although this can be adjusted to your requirements. The cost of the controller port is £19.80, and the joystick £9.60. Software includes Space Invaders and a ZX Maze at £6.95.

The Quicksilva sound and input/output board fits to the ZX-81 via a £12 motherboard. Alternatively, it can be fitted via a double-sided edge connector called a QS connector

| Manufacturer | Current from ZX-81 power supply | Power from other source |
|----------------|--|-------------------------------|
| Bolton | 60mA. | |
| DCP P pack | 45mA. | |
| A pack | 60mA. | |
| C pack | | |
| maximum | 77mA. | |
| Ground Control | 20mA. | 250mA. |
| JMJ | 70mA. | |
| Micro Gen | 70mA. | |
| QS Sound Board | 170mA. | |
| RS Super-Mum | 80mA. | |
| 8110 | 80mA. | |
| 8130 | 40mA. | |
| Technomatic | 40mA. | |
| Thurnall | 30mA. | |
| William Stuart | 100mA. | |
| Sinclair 16K | | |
| RAM | 260mA. | |
| Printer | 500mA. | |

Note: The Sinclair power pack will provide only 700mA and the printer power pack will only supply 1.2 A.

Table 2.

because it consists of just a printed-circuit board with a fingered edge like the ZX-81. Access to the port is rather difficult, due to the use of a AY-8910 integrated circuit which has 16 registers of which the input and output registers form only a part.

Therefore, to change from one register to another you must Poke the register number required into the control port, and then Peek or Poke the data into the port you want. As the music registers also use these locations, the programming can become somewhat complicated.

The sound/input/output board costs £26 and you should state for which machine you are ordering it. This is one of many boards available from Quicksilva which includes high-resolution graphics, programmable CHR\$ generator and 3K RAM. The board will, however, clash if you decide to buy more than 16K of memory for your system.

The RD Laboratories RD-8100 system module that we tested was the Super-Mum complete with the RD-8110 input/output port, and the RD-8130 analogue-to-digital input. The Super-Mum is buffered which means that any of the modules can be disconnected at any time without crashing the ZX-81. However, RD Laboratories offers a Micro-Mum which is not buffered and which can take only two modules; the Super-Mum can take eight.

Unit selection

The units are sealed and can be selected by two of 14 addresses, which means more than one type of board can be plugged in. It has two disadvantages, however; one that the top of the unit flexes when modules are plugged in; the second is that the pins at the top are very easily bent out of line.

Apart from this, it will be very useful for those people who require a large system, for monitoring equipment because plenty of modules can be added and no special connectors are required. The Super-Mum motherboard costs £40; Micro-Mum, £15; RS-8110, £22.50; RD-8130, £29.50; plus 80p per

order to cover the cost of postage and packing.

The £14.95 Technomatic port is a single-card which fits vertically behind the ZX-81. It has not only separate read and write sockets, but also access to the +5V and 0V power supplies. It works reasonably well except on the ZX-80. If, however, a fault develops, only Technomatic can replace the chips as they are only numbered 1 to 4. Special documentation, at £1 extra, contains some very useful designs for circuitry.

We found that the connections to the ZX-81 were too short and the 16K RAM pack did not seem to fit well.

The Thurnall Electronics port is mainly for the machine-code programmer. The instructions reveal that it can be programmed only in hexadecimal and refer you to the Sinclair manual. This input/output mapped port is fully-decoded and so will not be affected by Sinclair add-ons. Documentation gives some good examples of how to control higher voltages, but not what to do with the port itself. A 23-way edge connector is also required to access the output and input bits. The cost of the Thurnall port is £12.99 built, or £10.99 as a kit, to which should be added VAT and 50p postage and packing.

The William Stuart Systems port is well designed with stereo output, because it is also a sound board, and an AY-8910 chip to control it. Routines were given for a machine-code program which gives commands for using the port and which will make the Basic programmer feel happier. The examples of its use were, however, a trifle basic. It was disappointing that the routines, used to access the port, set the printer running, but this may be avoided by changing address straps.

The sound board costs £25.50 built and £19.50 as a kit plus VAT. We would have liked to try the sound facilities of this board with the tape provided, but it would not load because of the fact that *Surfing U.S.A.* could still be heard in the background.

Suppliers.

Bolton Electronics: 44 Newland Drive, Bolton, Lancashire. Telephone: 0204-64772.

DCP Micro Developments: 2 Station Close, Lingwood, Norwich NR13 4AX. Telephone: 0603-712482.

Ground Control: Alfreda Avenue, Hullbridge, Essex SS5 6LT. Telephone: 0702-230324.

JMJ Interfaces: Old School House, Rettendon Turnpike, Battlesbridge, Wickford, Essex.

Micro Gen: 24 Agar Crescent, Bracknell, Berkshire. Telephone: 0344-27317.


Quicksilva: 95 Upper Brownhill Road, Maybush, Southampton, Hampshire.

RD Laboratories: 5 Kennedy Road, Dane End, Ware, Hertfordshire SG12 0LU. Telephone: 0902-84380.

Technomatic: 15 Burnley Road, London NW10. Telephone: 01-452 1500/450-6597. Telex: 922800.

Thurnall Electronics: 95 Liverpool Road, Cadishead, Manchester M30 5BG. Telephone: 061-775 4461.

William Stuart Systems: Dower House, Herongate, Brentwood, Essex CM13 3SD. Telephone: 0277-810244.

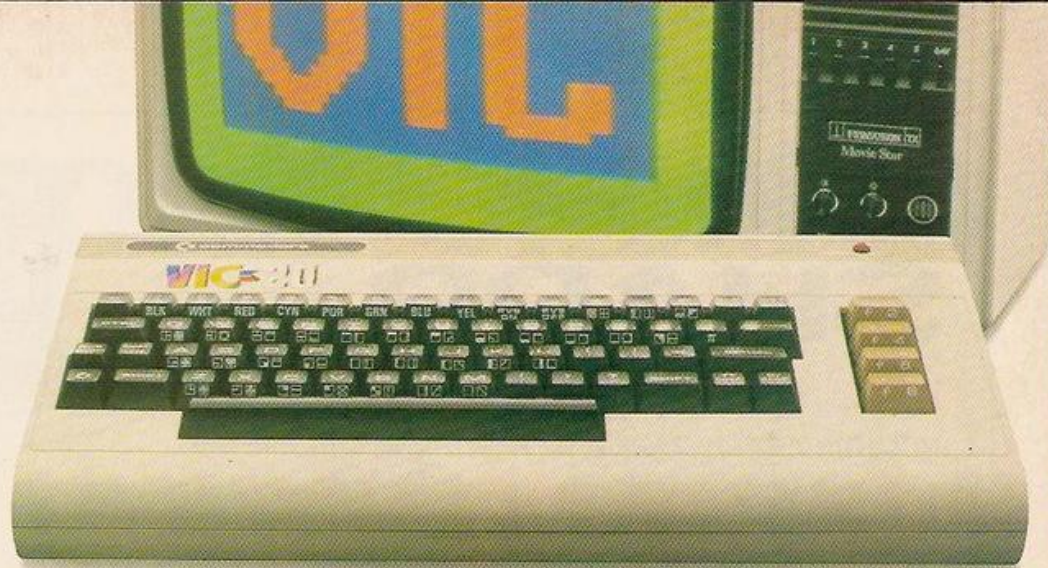

“Give me one good reason why I should choose a VIC 20 home computer.”

1. VIC is outstanding value for money. No other colour home computer can give so much for under £200.

2. Total standard memory 25K made up of 20K ROM and 5K RAM.

3. Fully expandable to 32K of user RAM.

4. Microsoft Basic interpreter as standard.

5. Accessible machine language as standard.

6. Connects direct to monitor or standard television.

7. Full size typewriter-style keyboard.

8. Full colour and sound.

9. All colours directly controllable from the keyboard.

10. 62 predefined graphic characters direct from the keyboard.

11. Full set of upper and lower case characters.

12. 512 displayable characters direct from the keyboard.

13. High resolution graphics capability built into the machine.

14. Programmable function keys.

15. Automatic repeat on cursor function keys.

16. User-definable input/output port.

17. Machine bus port for memory expansion and ROM software.

18. Standard interfaces for hardware peripherals.

19. VIC 20 is truly expandable into a highly sophisticated computer system with a comprehensive list of accessories (see panel below).

20. Full range of software for home, education, business and entertainment on disk, cassette and cartridge.

21. Books, manuals and learning aids from Teach Yourself Basic to the VIC programmers' reference guide (a must for advanced programmers).

22. Full support for VIC owners – their own magazine 'VIC Computing' as well as a national network of VIC user groups.

23. National dealer network providing full service and support to VIC owners.

24. Expertise and experience – Commodore are world leaders in microcomputer and silicon chip technology.

25. Commodore is the leading supplier of micro-computers in the UK to business, schools, industry and the home.

26. VIC 20 is the best-selling colour home computer in the UK.

How many reasons was it you wanted?

Accessories include:

- Cassette tape unit.
- Single drive 5 $\frac{1}{4}$ " floppy disk unit (170 K bytes capacity).
- 80-column dot matrix printer.
- 3K, 8K and 16K RAM expansion cartridges.
- Programming aid packs; machine code monitor cartridge, programmers' aid cartridge, high resolution graphics cartridge.

- Plug-in conversion box for a full 32K, 40-column x 25 lines VIC including Prestel compatibility.
- Prestel/Tantel interface package.
- RS 232C communication cartridge.
- Memory expansion board.
- IEEE488 interface cartridge.
- Joysticks, light pens, paddles and motor controllers.

commodore
VIC 20
The best home computer in the world.

COMPUTER 100 SHARP

LIMITED

MZ-80K SPECIAL OFFER!

INCLUDING BASIC TAPE AND PROGRAMMING MANUAL



ALL UNITS
ARE FULLY
UPGRADED AND
TESTED BEFORE
LEAVING OUR
WORKSHOPS

A proper full size microcomputer for less than the real cost of a toy microcomputer. The Sharp comes with 48K of RAM and the screen and cassette are built in, instead of being expensive extras.

£375
INC VAT

Computer 100 Limited
7 Southcote Parade
Southcote Farm Lane
Southcote
Reading, RG3 3D7
Reading (0734) 584545

Full range of
all Sharp peripherals
stocked at highly
competitive prices
Ring for further details

Price is inclusive of VAT
at current rate of 15%

Add £7.50 carriage/insurance to Mail Orders

COMPUTER 100 LIMITED

MAIL ORDER FORM

Name: _____


Address: _____

Post Code: _____

Tel: _____


Card No: _____

Mail To: **Computer 100 Limited**
Southcote Parade, Southcote
Reading, Berks, RG3 3D7



YC4/82

MICROAGE ELECTRONICS LONDON'S BIGGEST ACORN STOCKIST

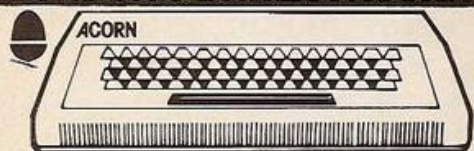

OFFICIAL
BBC
STOCKIST

We accept company/institutional orders.

ATOM KITS

In our books the best computer kit available. Build yourself an Acorn Atom for **only £135**, plus £2.50 p+p

ATOM SOFTWARE

Games Packs 1-8, Database, FORTH, Atomcalc, everything in stock. 30p p+p

BBC ROM

Update your Atom to the BBC operating system.

Atom Discpack. £345

5% discpack only £345, operating manual, cables, plus £2.50 p+p


DAI Personal Computer. £684

48K RAM 24K ROM

The BBC Cassette Recorder £24

As chosen by the BBC, but cheaper! £2.50 p+p
If it's not in the advertisement, send for our mail order lists.


ORDERS TAKEN NOW FOR BBC MACHINE



THE GP-80A dot matrix printer.
LOWEST EVER PRICE
ONLY £199 £4.50 p+p
Dot Matrix, Full 96 ASC11 character

ZX81 Owners £20 off

Bring us your working ZX80 or 81 and get £20 off any Atom - kit or built.

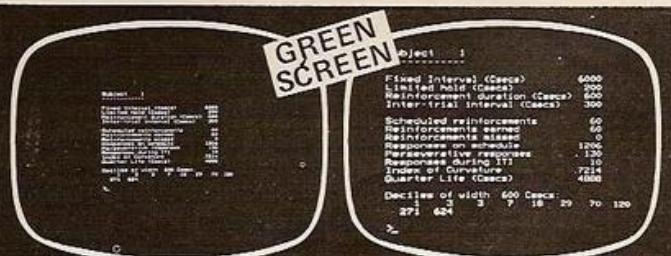

FROM THIS TO THIS AT THE FLICK OF A SWITCH

With the new ZENITH Monitor. Choose between small or large format depending on what you're doing. Small format for definition, large format for display. Full 12" GREEN screen. Only £85 while stocks last. It doesn't change the output from your computer, just changes the size of the display. Ideal for VIC 20, TRS 80, Atom BBC, + Genie machines. £4.50 p+p



Blank
Cassettes
40p each,
£3.50
for 10.
70p p+p

Also available:

2114 IC's, Paper for most printers, Enormous selection of Books, Leads, etc, etc, etc,

RACOMM COLOUR MONITOR
Absolute high resolution. 700x300 pictals 12" £350 + £5 p+p Atom BBC, & Genie machines.

ATARI VIDEO SYSTEM GAMES

Warlords _____ **£19.95**

Missile Command _____ **£22.50**

plus many, many more

ACTIVISION GAMES

Skiing _____ **£18.95**

Kaboom! _____ **£18.95**

plus many, many more
30p p+p

**ALL PRICES INCLUDE VAT
ABSOLUTELY NO MORE TO PAY.
SEE US AT COMPUTER FAIR 23-25 APRIL**

MICROAGE ELECTRONICS
135 HALE LANE EDGWARE MIDDLESEX HA8 9QP
TEL: 01-959 7119 TELEX 881 3241

THREE SORTS OF SPEED FOR THE ZX-81

David Lawrence has prepared a trio of sorts for use on the ZX-81. Under test conditions the shell-Metzner, the fastest of the three, outstripped the commonly-used bubble sort by more than 21 minutes.

GIVEN THE CHOICE, how long would you prefer your micro to take over a given task? The question is not as stupid as it sounds, especially when dealing with the ZX-81, which not even its best friends would describe as fast.

While machine-code buffs may worry whether a different method of executing a job might save a few microseconds, ZX-81 owners tend to be more concerned whether a complex program will finish its run before they go to bed. You do not have to be trying to calculate pi to a million decimal places to run into that

problem. In the January issue in Software File a program entitled "Effortless Index" by L. Basford appeared. The object of the program was to sort data such as names into alphabetical order for subsequent use.

The program worked perfectly and used a sorting method known as the bubble sort. "Bubble" because of the way in which items of data bubble up and down the array in small steps until they reach their correct place. However, run in slow mode, it took 24 minutes and 25 seconds to sort 100 randomly chosen words. Such times are not untypical of many sorting programs published by or for micro owners. Yet for little or no extra effort a successful sort can be achieved which is many times faster.

In this program, written for a 16K ZX-81, three of the many hundreds of sorting methods are tested against each other using a list of 100 random words generated within the program. All the methods would work equally

well with numbers rather than with strings.

The program is designed to illustrate why it is that different sorting methods can vary so much in the amount of time they take. It does this by displaying two important pieces of information which are essential in assessing any sort, namely:

- The number of times the program compares items within the list to be sorted, in order to rank them in value.
- The number of times items are exchanged within the list until the correct order is achieved.

If you wish to time the sorts, you will have to do it with a stop-watch. If you do not wish to try the whole program, then any of the three self-contained subroutines can be lifted straight out of the program, deleting only the lines which set and increment S and C, which are the counters for swaps and comparisons.

The first of the three sorts is an exchange
(continued on next page)

SORTING ON THE ZX-81

```

1 GOT05
2 SAVE "SORT"
3 STOP
1000 REM *****
1010 REM RANDOM WORDS
1020 REM *****
1030 DIM A$(100,15)
1040 DIM B$(100,15)
1050 FOR I=1 TO 100
1060 LET L=INT(RND*10+2)
1070 LET T$=""
1080 FOR J=1 TO L
1090 LET T$=T$+CHR$(INT(RND*26+38))
1100 NEXT J
1110 LET A$(I)=T$
1120 SCROLL
1130 PRINT A$(I)
1140 NEXT I
1150 REM *****
1160 REM GOSUBS FOR SORTS
1170 REM *****
1180 GOSUB 2200
1190 GOSUB 1250
1200 GOSUB 2200
1210 GOSUB 1500
1220 GOSUB 2200
1230 GOSUB 1760
1240 STOP
1250 REM *****
1260 REM EXCHANGE SORT
1270 REM *****
1280 PRINT "EXCHANGE SORT"

1290 LET N=100
1300 LET A=0
1310 LET B=0
1320 LET C=0
1330 LET S=0
1350 LET A=A+1
1360 IF A=N THEN GOTO 1480
1370 LET B=B+1
1380 LET C=C+1
1390 IF B$(A)>B$(B) THEN GOTO 1430
1400 LET B=B+1
1410 IF B>N THEN GOTO 1350
1420 GOTO 1380
1430 LET S=S+1
1440 LET T$=B$(A)
1450 LET B$(A)=B$(B)
1460 LET B$(B)=T$
1470 GOTO 1400
1480 GOSUB 2080
1490 RETURN
1500 REM *****
1510 REM DELAYED REPLACEMENT
1520 REM *****
1530 PRINT "DELAYED REPLACEMENT SORT"
1540 LET A=0
1550 LET B=0
1560 LET C=0
1570 LET D=0
1580 LET N=100
1590 LET S=0
1600 LET D=D+1
1610 IF D=N THEN GOTO 1740

```

(listing continued on next page)

(continued from previous page)

sort. It begins by looking at the first item and comparing it with the second. If item 1 is less than item 2, then they are swapped. All explanations are on the understanding that the list is to be sorted into ascending order, starting with position 1 — that is, A,B,C,D,E.

Item 1 is now compared with item 3 and the two are swapped if 3 is less than 1. 1 is now compared with 4, and so on. By the time item one has been compared with every other item in the list, and any necessary swaps made, the smallest item must be in position one. The procedure is now repeated for position two, and so on down the list.

Comparing this method with the bubble sort mentioned earlier, we find that the number of comparisons required is reduced from 9,173 to 4,950 and the number of swaps remains constant at 2,403. This results in a reduction in the amount of time taken to sort the same list from more than 24 minutes to 13.5 minutes.

Even though a considerable amount of time is saved, much unnecessary swapping is still occurring. Each time the program finds an item smaller than, for instance, item 1, the two are swapped. While this does finally result in the smallest item being in the correct position, it is only at the expense of putting many items which are not the smallest there first.

If the original order of items were E,D,C,B,A then every item in the list would have been in position 1 before the correct one is settled on. Clearly, we could increase the

Comparison table. Alphabetical sort of 100 words by differing methods.

| Method | Swaps | Comparisons | Time in minutes |
|---------------------|-------|-------------|-----------------|
| Bubble | 2,403 | 9,173 | 24.25 |
| Exchange | 2,403 | 4,950 | 13.15 |
| Delayed-replacement | 95 | 4,950 | 9.02 |
| Shell-Metzner | 379 | 801 | 3.01 |

Figures are for one particular list and would vary for other lists.

efficiency of the sort if the program first found the lowest value item and only then made the swap.

This is achieved by the second sort, the delayed-replacement sort, which requires 16 program lines rather than 14 for the first method and, in return for the extra lines, reduces the sort time to nine minutes, with 4,950 comparisons as in the previous method, but only 95 swaps — five items happened to be in the correct position originally.

Process of improvement

The process of improvement could go on indefinitely. There are many hundreds of different methods of sorting, some of them general, some designed for very specific purposes. Many of them are more or less radical variations of the basic methods already discussed but real speed requires a different approach. One such approach is exemplified

by the third method given in the test program, generally known as the shell-Metzner sort.

The detailed working of this sort is too complex to go into here. Suffice it to say that rather than searching methodically for the lowest value, the program scans the table of items, comparing pairs with a gap between them of

$$((2^*I) - 1)/2$$

where 2^*I is the smallest power of 2 which is greater than the total number of items in the list. This is followed by a scan of pairs having half that gap, and so on.

This invariably results in a higher number of swaps than method two but combined with dramatically fewer comparisons. The routine given for this method in the test program requires 21 lines — six more than the previous method. However, it reduces the time taken to complete the sort to three minutes — one-eighth of the time taken by the bubble sort — with 801 comparisons and 379 swaps.

Whether or not such an increase in speed justifies the extra program space depends on how often and how many items you want to sort. The saving in time will increase proportionately as the number of items increases. However, every micro owner needs to be aware that a variety of sophisticated sorts such as the shell-Metzner are easily available to increase the power of their machines.

The test program runs in slow mode; in practice, the sort section of any program should be run in fast, cutting execution time by 50 percent.

(listing continued from previous page)

```

1620 LET A=D
1630 LET B=A+1
1640 LET C=C+1
1650 IF B$(B)<B$(A) THEN LET A=B
1660 LET B=B+1
1670 IF B<=N THEN GOTO 1640
1680 IF D=A THEN GOTO 1600
1690 LET S=S+1
1700 LET T=B$(A)
1710 LET B$(A)=B$(D)
1720 LET B$(D)=T
1730 GOTO 1600
1740 GOSUB 2080
1750 RETURN
1760 REM *****
1770 REM SHELL-METZNER
1780 REM *****
1790 PRINT "SHELL-METZNER SORT"
1800 LET C=0
1810 LET S=0
1820 LET A=1
1830 LET N=100
1840 IF 2**A>N THEN GOTO 1870
1850 LET A=A+1
1860 GOTO 1840
1870 LET F=2**A-1
1880 LET F=INT(F/2)
1890 IF F=0 THEN GOTO 2060
1900 LET D=N-F
1910 LET B=1
1920 LET A=B
1930 LET E=A+F
1940 LET C=C+1

```

```

1950 IF B$(A)>B$(E) THEN GOTO 1990
1960 LET B=B+1
1970 IF B>D THEN GOTO 1880
1980 GOTO 1920
1990 LET S=S+1
2000 LET T=B$(A)
2010 LET B$(A)=B$(E)
2020 LET B$(E)=T
2030 LET A=A-F
2040 IF A<1 THEN GOTO 1960
2050 GOTO 1930
2060 GOSUB 2080
2070 RETURN
2080 REM *****
2090 REM PRINT SORTED LIST
2100 REM *****
2110 FOR I=1 TO 100
2120 SCROLL
2130 PRINT B$(I)
2140 NEXT I
2150 SCROLL
2160 PRINT "COMPARISONS:";C
2170 SCROLL
2180 PRINT "SWAPS:";S
2190 RETURN
2200 REM *****
2210 REM RESET LIST
2220 REM *****
2230 FOR I=1 TO 100
2240 LET B$(I)=A$(I)
2250 NEXT I
2260 CLS
2270 RETURN

```




ZX80/1 16K RAM PACKS MASSIVE ADD ON MEMORY FULL SIZE KEY BOARDS WITH REPEAT KEY

£32.95
INC. V.A.T.

£27.95
INC. V.A.T.

WHY WAIT TO PAY MORE
FAST DELIVERY:

Post to:
Dept YC4
Kayde Electronic Systems
48/49 Exmouth Road
Great Yarmouth
Norfolk
NR30 3DP
Tel: (0493) 55253

Please send me..... RAM Pack/s
At £32.95 each
Please send me..... Keyboard/s
At £27.95 each
I enclose £.....
Name.....
Address.....

Please add £1.00 P/P and make cheques payable to
Kayde Electronic Systems.

All products inc. VAT are fully built and
tested and come complete with
money back guarantee.

See us at Stand V19
Computer Fair

BASIC

TRANSLATING SOFTWARE

Good form seems to demand that every new micro should have its own idiosyncratic Basic dialect. So, where the newcomer might expect to find a wealth of software, incompatibility reigns supreme. Tony Edwards starts his new series on software translation with a look at the broad techniques.

YOUR FIRST consideration must be whether translation is worth the effort. This depends on the complexity of the task and on how badly you want to run the program in question. It is often difficult to assess just how complex the task of translation will be, but here are some general points for guidance.

First, judge the size of the program by its number of lines and the amount of memory it is said to use. Look at the program's Basic dialect to see if it is familiar or completely alien. Compare the computer the program was written for with yours. If the program is an Adventure written for a 1MB mainframe, you cannot reasonably expect it to run.

Even if the prospects for direct translation are poor, the idea may be transportable if you think it worth the effort. This would entail reducing the program into a flowchart, and the conversion of the flowchart into your dialect of Basic. This is a long task, but one that is sometimes worth the effort.

Unportable graphics

Another factor in evaluating the complexity of translation is the amount of graphics used. Graphics are the most unportable part of Basic dialects and a program which relies largely on graphics may lose most of its impact on translation. You will often have to completely reprogram the graphics, and you must learn by experience which types of computer have superior graphics to yours and thus have graphic programs which are worthless on translation.

In both graphical and non-graphical programming it is always easier to translate up rather than down. For instance, ZX-80/81 programs usually translate well on to a TRS-80 or Pet, but translation in the other direction is difficult and often only ideas can be used.

This is an advantage for non-ZX-80/81 users as many very clever programs and subroutines have been published for ZX-80/81 which can be easily and usefully translated for use on bigger machines.

One final warning. If the program to be translated contains Peek/Poke statements — or their equivalents such as Deck/Doke, Exam/Fill and Fetch/Stuff — leave well alone unless the listing includes details of the reason for these statements and you are confident you can identify equivalent Peek/Poke addresses on your own machine.

Having decided on translating a program, you need a strategy to ensure it is done in a systematic way. Read the whole listing and mark any line which contains any statement you do not recognise as part of your dialect. Then go through, line by line, typing in the program, and each marked line can be altered to suit your dialect.


In many cases the necessary alterations are simple and obvious but some will be more difficult — the program may contain statements which you do not understand, or statements which your machine is not able to mimic. In the November issue, Guy Brooker offered a useful little subroutine for drawing a line between two points on the video screen. This program was for the ZX-81 and is reproduced here with the lines containing statements not recognised by my Basic dialect marked with an asterisk.

I have added two lines at the start of the program and changed the last one so it runs as a program rather than as a subroutine. This is good strategy in complex programs as it allows separate sections to be translated and tested individually.

```
10 PRINT "1ST POINT CO-ORDINATES";
  INPUT X1, Y1
20 PRINT "2ND POINT CO-ORDINATES";
  INPUT X2, Y2
30 LET G = 0
40 LET H = 0
*50 LET X = X2 - X1
60 LET Y = Y2 - Y1
70 LET Z = ABS X
*80 IF ABS Y > Z THEN Z = ABS Y
90 FOR F = 1 TO Z
*100 PLOT G + X1, H + Y1
110 LET G = G + X/Z
120 LET H = H + Y/Z
130 NEXT F
140 END
```

My computer accepts assignment statements with or without Let, so I deleted all Let statements and concentrated on the marked lines 70, 80 and 100. My dialect required brackets around the argument of functions, so I added them. With regard to line 100, this simply switches on the indicated graphics block on the ZX-81 so I replaced it with the equivalent from my Basic dialect and produced the translated program:

```
10 PRINT "1ST POINT CO-ORDINATES";
  INPUT X1, Y1
20 PRINT "2ND POINT CO-ORDINATES";
  INPUT X2, Y2
30 G = 0: H = 0: X = X2 - X1: Y = Y2 - Y1
70 Z = ABS (X)
```

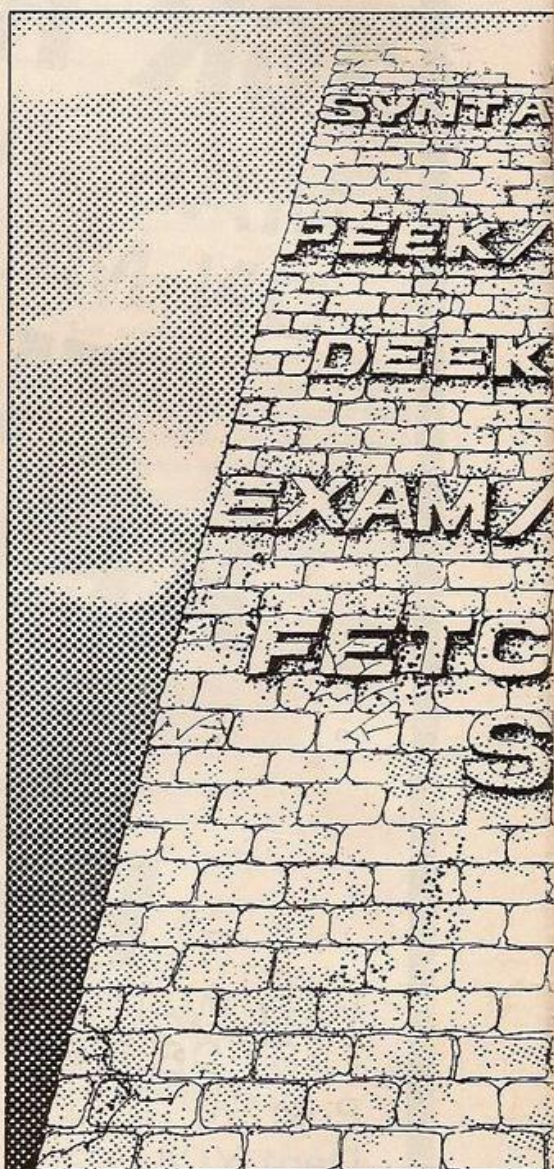


```
80 IF ABS(Y) > Z THEN Z = ABS(Y)
90 FOR F = 1 TO Z
100 SET (G + X1, H + Y1)
110 G = G + X/Z: H = H + Y/Z
130 NEXT F
140 END
```

Moment of truth

Now the moment of truth. Type Run and test it. In my case it worked and I have a very useful subroutine for use in future programmes when drawing graphics. Perhaps it did not work for you. If not, further translation is necessary. Two faults could occur: your computer may have returned a syntax-error prompt. If this is the case, it has identified another line which needs translation.

FOR YOUR MACHINE

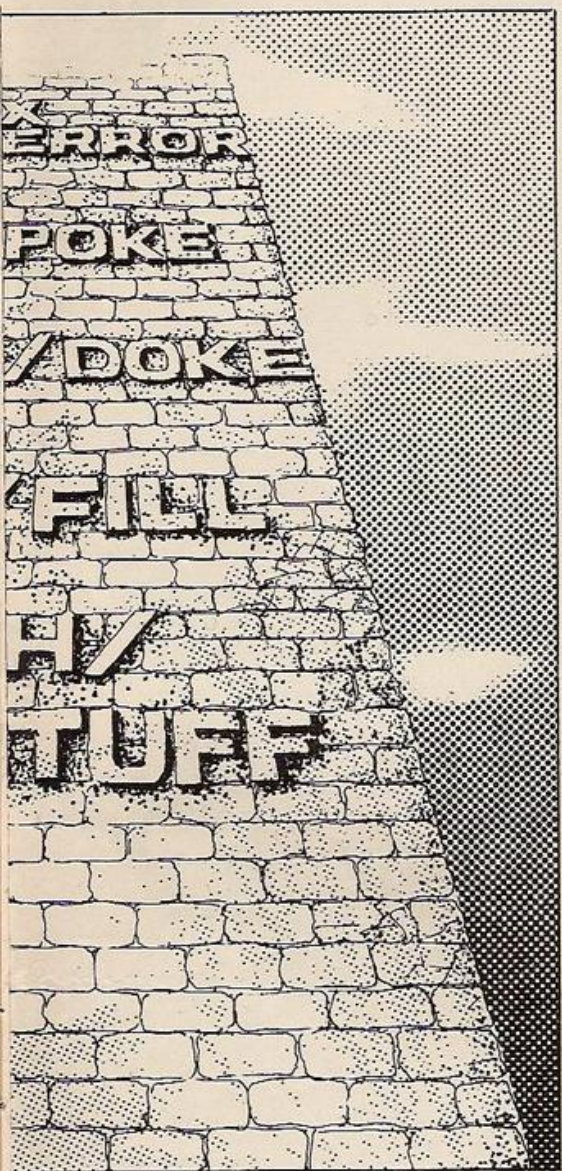

The other fault is more difficult to handle. Perhaps the translated program ran but produced the wrong results — as it would on a TRS-80 with 32 characters selected. If this was the case when you tried you must look at the logic of the translated program and see why it does what it does rather than what it was intended to do.

A possibility not to be overlooked when faced with this problem is difficulties with integer and non-integer arithmetic — does your machine have the same type as the machine for which the program was written? In this case, the program was written using integer arithmetic, but the Set statement, or its equivalent, has an implicit Int function on most machines so this does not matter.

The Inkey\$ or its equivalent, is often used

and causes difficulties in translation. Inkey\$ is used in TRS-80 level 2 Basic to read a character directly from the keyboard without waiting for the <enter>. It is used in a loop such as

```
10 IF INKEY$ = "X" GOTO 100 ELSE
    GOTO 10
```

or

```
10 A$ = INKEY$: IF A$ = "X" THEN 100
    ELSE 10
```

which waits until the X key is pressed then moves on to line 100.

Some machines have similar statements, which you will recognise if you have one. For example, Pet users will recognise this function as similar to that of Get A\$. Many machines have no equivalent statement, and short of using a normal Input statement, their owners may be in trouble.

However, let us reflect for a moment. After pressing a key, what happens to the character while the machine waits for additional input or the <enter> command? The answer is that it is stored in the keyboard buffer. So all we have to do is look at the buffer to see if a key has been pressed and we have our Inkey\$ statement.

Unfortunately, it is not always as easy said as done. First where is the keyboard buffer? It must be in the RAM somewhere. If you do not know where it is in your machine and the instruction book does not help you, it should not be too difficult to find, as it must lie between the ROM addresses and the first RAM address available for a Basic program. Once the keyboard buffer has been identified a short machine-code program is the best way of producing an Inkey\$ statement. If you have a ZX-80 the required program is:

```
10 REM XXXXXX
20 LET A = 16426
30 POKE A, 219
40 POKE A + 1, 0
50 POKE A + 2, 111
60 POKE A + 3, 38
70 POKE A + 4, 0
80 POKE A + 5, 201
```

With this routine at the start of the program; the Inkey\$ statement can be mimicked with

```
LETA =USR(16426)
```

but remember to bed it in a loop. Similar routines can be created for other machines. On the UK101, for instance, the equivalent routine would be:

```
10 FOR I = 592 TO 619: READ Z: POKE I,Z:
    NEXT I
20 DATA 173,79,2,240,5,32,231,249,208,4,141,
    19,2,96,32
30 DATA 0,253,169,0,141,79,2,169,1,141,20,
    2,96
```

This program should be loaded, run and Newed. Then the Inkey\$ statement could be simulated by:

```
100 POKE 11,80: POKE 12,2: POKE 591,1
110 X = USE(X): Z = PEEK(531):IFZ#
```

0 GOTO 1000: GOTO 110

If you cannot face machine code, the Inkey\$ statement can be mimicked from Basic. At the start of your program, set up a cross of switched-on pixels, as shown in figure 1, in some corner of the display.

When you require the Inkey\$ input, use cursor control or Print @ to place the cursor in the centre of the cross. Use of the up-, down-or back-arrows or the space back at this stage will blank one of the four pixels on most machines, so here is our Inkey\$ function.

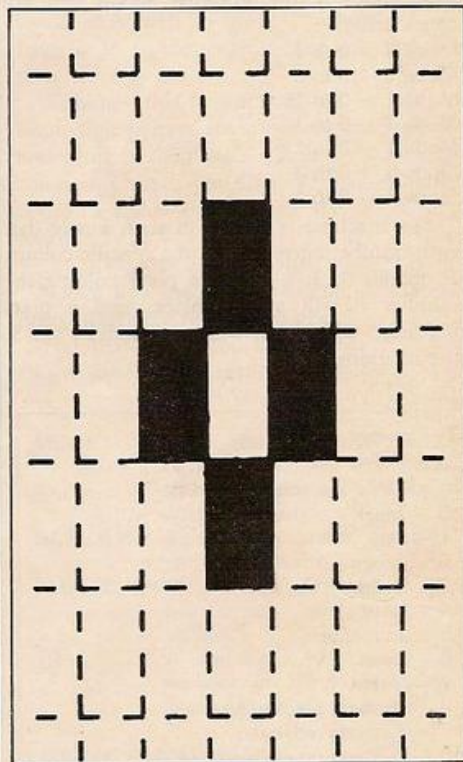


Figure 1.

All you need is a short routine to test each of the four pixels to check if it is on or off, branching as indicated by the result. Do not forget to reset the pixels and replace the cursor if you want to use the function again.

I hope this has whetted your appetite for more. However, you must help too. If you write saying what problems you would like discussed in future issues, I will endeavour to try to accommodate as many requests as possible. Further, the whole effort is wasted unless you try to translate programs from one dialect to another.

Finally, if you have discovered any good routines to simulate specialised statements from other Basics write and let me know and I will add the best, with acknowledgment, to future articles. Next month I will discuss, among other things, String control and Print @ statements.

Jeremy Ruston assesses the BBC machine's colour graphics and shows how its powerful built-in Basic can be used to provide some spectacular effects on the screen.

THERE ARE a number of techniques you can use to produce startling results with the BBC Microcomputer's graphics facilities. Hidden in the back of the provisional user guide of the BBC machine you will find mention of the command VDU 19. It enables you to change the colour of an area or spot of colour on the screen, without having to redraw the object. Users of the Atari 400/800 will recognise this facility as the equivalent of their Set Color command.

To use this command effectively, you have to think about colour graphics in a new way. Rather than consider blobs of colour, think of the screen as being divided into a number of squares, where each square, or pixel, can hold a number. This number is restricted in magnitude by the graphics mode you are considering:

Mode 0 — 0 to 1
Mode 1 — 0 to 3
Mode 2 — 0 to 15
Mode 3 — 0 to 1
Mode 4 — 0 to 1
Mode 5 — 0 to 3
Mode 6 — 0 to 1

The machine is set up in such a way that each number corresponds to a specific colour. In modes 0, 3, 4 and 6, a pixel holding the number 0 will appear black, and a pixel holding 1 will appear white. In modes 1 and 5, the relationships are:

0 — black
1 — red
2 — yellow
3 — white

In mode 2 the relationship is:

0 — black
1 — red
2 — green
3 — yellow
4 — blue
5 — magenta
6 — cyan
7 — white
8 — flashing black/white
9 — flashing red/cyan
10 — flashing green/magenta
11 — flashing yellow/blue
12 — flashing blue/yellow
13 — flashing magenta/green
14 — flashing cyan/red
15 — flashing white/black

The intriguing possibilities soon become apparent once you realise that all these relationships can be changed by executing a command of the form

VDU 19, colour_number, colour,0,0,0


where

colour_number


is a number in the range of those shown in the first table. Colour is a variable with any value from 0 to 15. After this statement has been executed, any pixels holding the number "colour_number" will assume the colour indicated by "colour", according to the second table given.

There are many applications for this command. If you first set the pixels of a

COMMANDING ON THE BBC'S

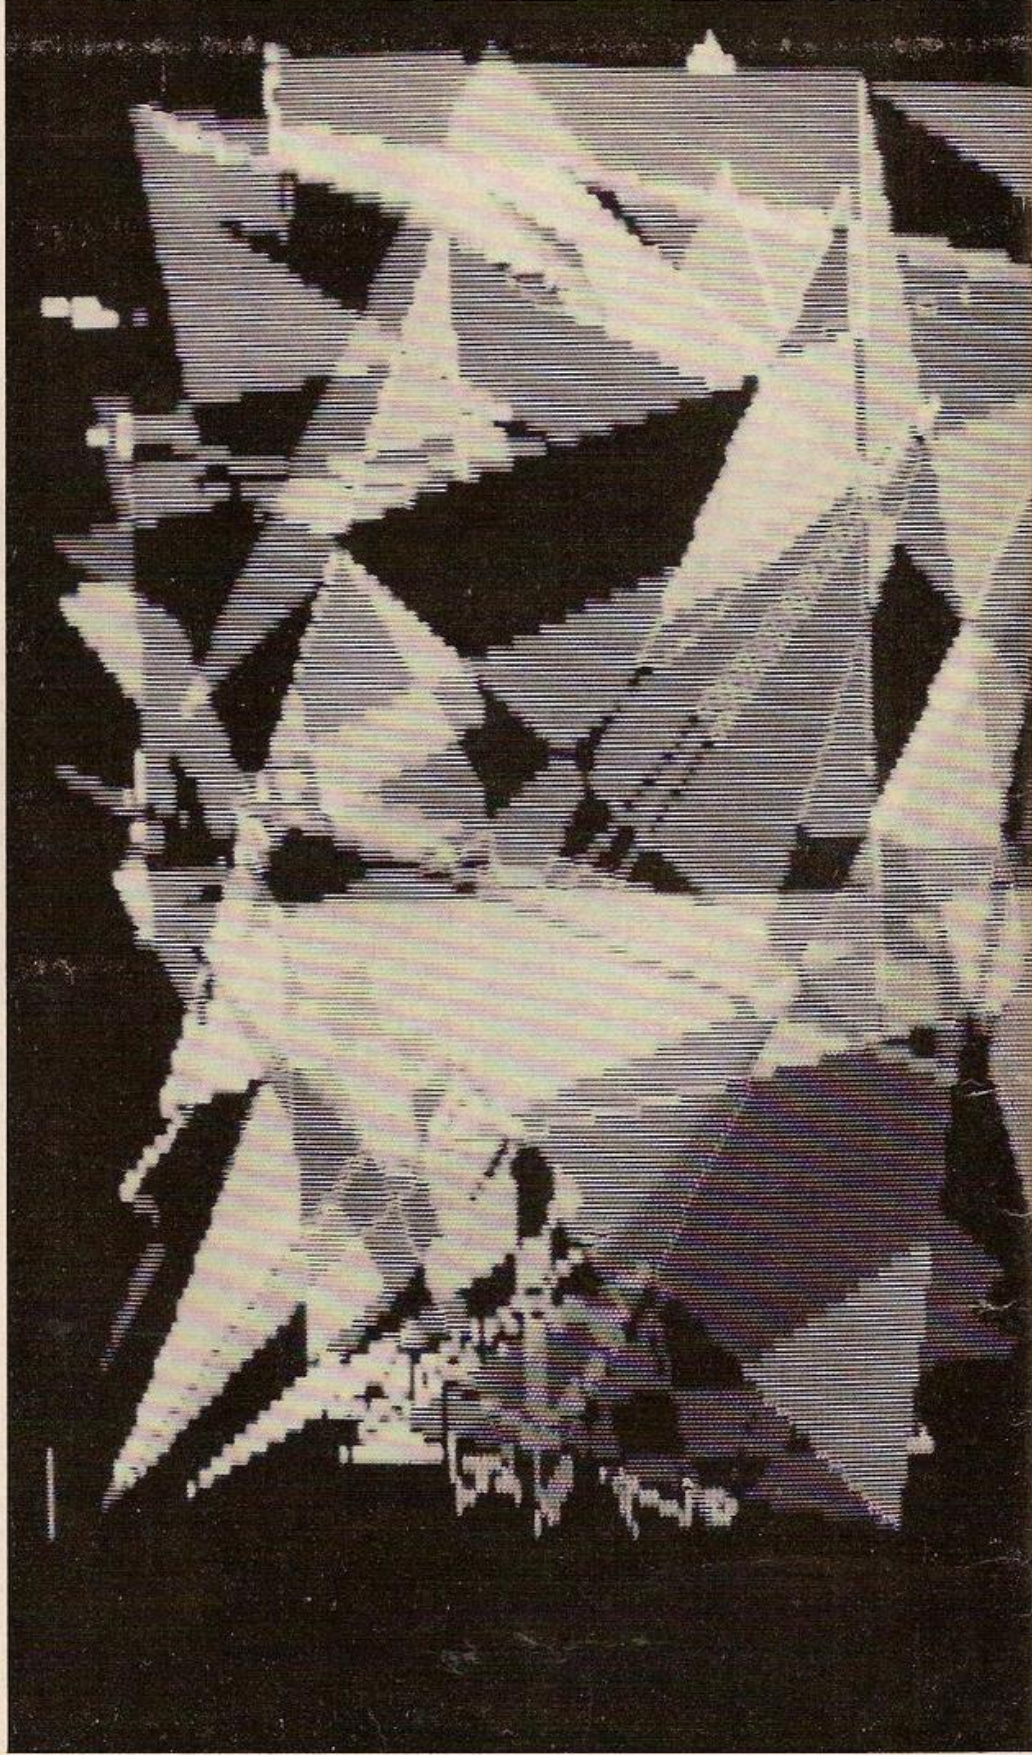

BASIC MICRO

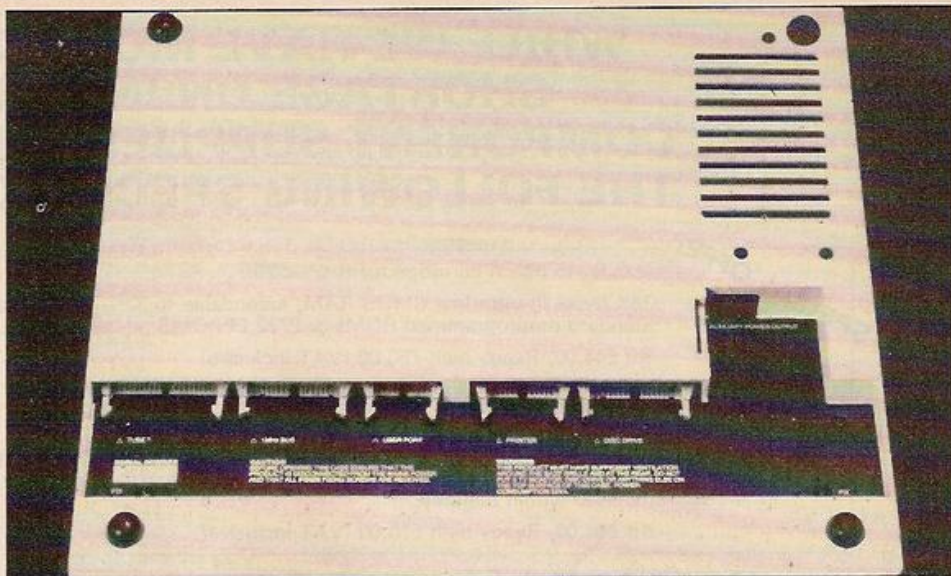

graphics screen to appear black no matter what number they hold, and you then draw a complex shape or pattern before restoring the normal relationships with VDU 20, it will appear that the drawing has been instantaneously.

For example, this program draws a circle with the screen turned off, and then restores all the normal colours very quickly. To those more used to an Apple's high-resolution graphics, this can be dramatic:

```
10 MODE 5
20 FOR colour = 1 TO 3
30 VDU 19, colour, 0, 0, 0
40 NEXT colour
50 MOVE 640, 512 + 500
60 FOR angle = 0 TO 330 STEP 30
70 GCOL 0, 1
80 MOVE 640, 512
90 PLOT 85, SIN(RAD(angle + 10)) * 500 + 640,
  COS(RAD(angle + 10)) * 500 + 512
100 GCOL 0, 2
110 MOVE 640, 512
120 PLOT 85, SIN(RAD(angle + 20)) * 500 + 640,
  COS(RAD(angle + 20)) * 500 + 512
130 GCOL 0, 3
140 MOVE 640, 512
150 PLOT 85, SIN(RAD(angle + 30)) * 500 + 640,
  COS(RAD(angle + 30)) * 500 + 512
160 NEXT angle
170 VDU 20
180 END
```

As a logical step from this example, if you draw many similar figures, all set to black, and then in rotation set each to a specific colour, and then back to black again, the illusion of extremely fast movement is created. This example should explain the technique:

```
10 MODE 5
20 FOR X = 0 TO 1279 STEP 20
30 MOVE X, 0
40 GCOL 0, ((X DIV 20) MOD 3) + 1
50 DRAW X, 1023
60 NEXT X
70 REPEAT
80 FOR colour = 1 TO 3
90 VDU 19, colour, 4, 0, 0, 0
100 TIME = 0
110 REPEAT UNTIL TIME = 20
120 VDU 19, colour, 0, 0, 0, 0
130 NEXT colour
140 UNTIL FALSE
```

The program works by drawing a series of vertical lines in each of three colours in turn. Then each colour is selectively turned to blue — line 90. A time-consuming loop, lines 100

to 110, of 0.2 of a second is set up before the colour is reset to black. The construction Repeat-Until False carries out the statements in the middle ad infinitum. This technique works very well in mode 2, where you can have up to 16 shapes to lighten and darken in turn.

Without this command it would be impossible to have any other colours but black and white in the modes which allow only two colours. Thus if you like the idea of purple text on a yellow background, try this in mode 4 or 0:

```
VDU 19, 0, 3, 0, 0, 0, 19, 1, 5, 0, 0, 0
```

Notice how two VDU 19 commands have been effectively reduced to one.

You may have noticed on *The Computer Programme* that several programs were

| | |
|---------------|--|
| MODE | Sets the computer in a different graphics/text mode. |
| MOVE | Moves the graphics cursor to a specified position. |
| GCOL 0, X | Sets the current graphics-plotting colour to X. |
| PLOT 85, X, Y | Plots a triangle between the point specified and the last two visited. |
| TIME | A variable which gives the number of hundredths of a second since it was last set. |

Program commands.

developed on a screen with white letters and a striped blue background. The reason for the stripes is that all this text was displayed in mode 6, which is a text-only mode with 25 lines of 40 characters.

As there are only 25 lines instead of the normal 32, so to fill up the extra space, Acorn inserted some extra, black lines between each line of text to make the text easier to read and to fill the space. Unfortunately, these extra lines are not affected by the VDU 19 command.

There appears to be a bug in the latest version of the BBC Microcomputer's monitor: when

```
VDU 19, 0, 23, 0, 0, 0
```

is executed in mode 6, the screen display became blurred around the edges, rather like a photograph of a fast-moving car.

WHILE WE HAVE MOMENTARY SHORTAGE ON INTERSIL COMPONENT SUPPLIES, WE MAKE THE FOLLOWING SPECIAL OFFERS:

SPECIAL OFFER

V.C.R. 16 (RAM cartridge for the Vic 20):
16K bytes in ultra fast CMOS RAM, extendable to 32K, 4 spare sockets for
standard preprogrammed ROMs or 2732 EPROMS —
Kit £44.00, Ready built £50.00 (VAT inclusive)

SPECIAL OFFER

DUO 1 (designed for the Atom exclusively):
64K bytes of reliable motorola RAM, usable for basic programming supplied
with sample programs — single 5V/200mA supply. No PSU required. Can be
installed within minutes.
Kit £64.00, Ready built £70.00 (VAT inclusive)

SPECIAL OFFER

Special RAM pack for the ZX81:
The board is the smartest available, only 3" wide and 4" long housed in a
plastic sleeve, offers 48K bytes for basic programs, takes DIM A (9500), no
PSU required. Amazing!!!
Kit £54.00, Ready built £60.00 (VAT inclusive)

SPECIAL OFFER

48340 BYTES FREE!!! for TRS 80 and Video Genie
Kit £40.00, Ready built £46.00 (VAT inclusive)

ALL SPECIAL OFFERS ARE EX-STOCK. NO QUANTITY DISCOUNT AVAILABLE.
EXPORT AND DEALER CONDITIONS PLEASE REFER TO SALES OFFICE.
(TELEX: AUDCOM 995337 G)

AND MORE . . .

SPECIAL OFFER!

48340 BYTES FREE!
for TRS80 and Video Genie.
Kit £40.00 Ready built £46.00
EX-STOCK DELIVERY!!!

Dear Audio Computers,

- ☐ I am a ZX user,
☐ Please send me more technical details on your products. ☐ Please send me the items circled above.
☐ I am using a: (please tick)
☐ Acorn Atom ☐ Pet series . . . ☐ UK101 ☐ 6502 OS1 ☐ TRS 80 model . . . level . . . ☐ Video Genie model . . .
☐ Please send me more technical details on your products. ☐ Please send me the items circled below:

| | 780A based* | | 6502 based | |
|---|-------------|-------------|------------|-------------|
| | Kit | Ready built | Kit | Ready built |
| 32K bytes Ram expansion | £46.00 | £54.00 | £59.00 | £69.00 |
| 64K bytes Ram expansion | — | £79.00 | — | £100.00 |
| 128K bytes Ram expansion | — | £138.00 | — | £150.00 |
| 128K bytes Ram array for further expansion | — | £110.00 | — | £110.00 |
| 16K CMOS Ram expansion | £44.00 | £50.00 | £44.00 | £50.00 |
| 16K Eprom expansion | £30.00 | £36.00 | £30.00 | £36.00 |

Prices include VAT at 15% and p&p, full documentation and warranty
Except special offer for 32K on Video Genie and TRS80 modules
See above

- ☐ I require a VAT receipt
☐ I enclose a cheque/postal order payable to Audio Computers, for £.....
☐ Please charge to my Access/Barclaycard account no
☐ Name: Mr/Ms:
☐ Address:

See us at Stand V35
Computer Fair

Mail (or post) to: Dept YC4 Audio Computers, 87 Bournemouth Park Road, Southend on Sea, Essex.
Tel: (0702) 613081 Telex: AUDCOM 995337 G

Roy Burgin sets out to show that the speed and simplicity offered by Atom line labelling make it a system worth mastering.

THE ATOM'S line-labelling system is a very useful programming aid which is not only fast in operation, but also makes simple renumbering possible without having to bother about Gotos and Gosubs. An added bonus is that the program is easier to follow. I would even go so far as to recommend that you do not Goto or Gosub line numbers but always use labels.

Using a mixture of both systems can lead to problems since a jump to a line number that has a label will result in a run-time error. You may think that a total of 27 labels is not adequate for a large program but as I will show, labels can be used again and again — under the right circumstances.

The 27 labels include all the inverted or lower-case letters plus an extra one that I will deal with separately as it is rather special.

Program construction

To understand the way that the labels work and to realise why Acorn decided to include them in Atom Basic, it is useful to look briefly at how a program is constructed and how the Basic interpreter sees it. A typical line in a program is made up of three parts plus the label.

The first two bytes contain a binary representation of the actual line number you have entered. This is used by the Basic editor for the normal sorting of program lines as you type them and also by the Basic interpreter for finding a numbered Goto or Gosub.

There are no link addresses as used in most other Basics, so a search for a line number in either case involves starting at the beginning of the program and working through each line until the line number or a greater one is found.

Each line is seen by the system as a number followed by a string, so the pointer must be moved on by a process similar to Len in Basic. This can be very time-consuming in a large program.

The third byte is the position reserved for the label if one is included. Otherwise, it is the start of a string of characters that make up the statement or multi-statement line. This is the only position where a line can be labelled.

The third part is the string of characters which form the statement. The length of this string is normally limited to 64 characters by the size of the input buffer located at # 100. That includes all the characters which form the line number. This size can, however, be increased up to a maximum of 252 characters and most of the Basic statements will still work perfectly — see the program called Long Lines.

Last character

The last character is the final part. The statement line must end with the normal string terminator, which is a carriage return CH 13. This is the character recognised by the Len function.

The Basic statement line is not tokenised but is entered into memory exactly as it is

```
100?18=#82; REM LABEL IS INVERSE SQUARE OPEN BRACKET
20 REM auto number/long lines
30 REM LOAD AT #8200, SET UP BY TYPING RUN, BREAK, NEW OR OLD
40 REM USE DIRECT FROM LOWER MEMORY BY TYPING G.
50 REM M/C GETKEY ROUTINE
60 !#28E0=#85FFE620
70 !#28E4=#00006080
80 INPUT "BEGIN AT LINE NUMBER" B, "STEP" S,
90 REM T=TOP OF YOUR PROGRAM IN LOWER MEMORY
100 T=TOP-2
110 @=5
120 ?T=13
130 T=T+1
140 REM LINE LOOP, STEP POSITIVE OR ZERO, NEGATIVE TERMINATES
150 FOR J=B TO 32767 STEP S
160 PRINT J
170 REM SET UP LINE NUMBER IN YOUR PROGRAM
180 ?T=J/255
190 T?1=J&255
200 T=T+2
210 REM LINE LOOP, INPUT CHARACTER BY CHARACTER AND STORE IN
220 REM YOUR PROGRAM, RESET END OF PROGRAM MARKER EACH TIME
230 FOR I=0 TO 249
240 LINK#28E0; IF I=0; IF?#80=13; G.d
250 IF I=0; IF?#80=#7F; G.a
260 IF?#80=#7F; I=I+1; T=T-1; G.a
270 IF I=249; P.##7F; G.a
280 ?T=?#80
290 IF?T=13; I=249; G.b
300 T?1=13
310 IF I>244; P.##7
```

(listing continued on next page)

LINE LABELLING EARMARKS ATOM ECONOMY

typed in — after binary coding the line number — and can be examined not only by the List command but also by Print\$ (memory location), which prints out the string starting at that position.

This simplicity is the key to the Atom's flexibility but can have disadvantages. Much is made of the ability to shorten the Atom's Basic keywords to one or two characters followed by a full stop. This is Acorn's answer to the memory savings made by the tokenising used in Microsoft Basics.

Speed of execution is also improved by using these short forms, although in some cases the saving is negligible. For example, when I had fitted the versatile interface adaptor chip to my computer, I tested it using the program given in *Atomic theory and practice* on page 170.

This program times the execution of individual statements, and I found that the difference between Link and LI. was only 1µs. However, this was exceptional and most of the shortened forms are worth considering, even if they do reduce the readability of the program.

As mentioned, the construction of the program will affect the speed of operation of numbered Gotos or Gosubs. The usual answer to this problem, offered to Microsoft programmers, is to place often-used subroutines

at the beginning of the program so that they can be located quickly, usually at the expense of program structure. The same advice applies to Atom Basic except that Acorn has gone one better by introducing the labels.

There are 26 normal labels plus an extra one which is not documented by Acorn. If Acorn were aware of the existence of the 27th label, it may have been ignored because it can be used only under certain circumstances.

Three conditions

There are three conditions which cause the label routine to be called by the operating system and the first is when you type Run. The area of memory allocated to storage of the labels is zeroed — locations # 38D to # 3C0. Each label has two consecutive bytes associated with it; a=# 38D and # 38E, b=# 38F and # 390 and so on. These locations are used to store the actual position of that label in your program.

The second condition occurs during the execution of the program. The interpreter checks the third byte of every statement line before execution to see if it contains a label. If it does, the memory location of that label is stored in the appropriate slot; otherwise, no

(continued on next page)

(listing continued
from previous page)

```
320bT?2=#FF
330 T=T+1
340 NEXT I
350 NEXT J
360 PRINT "NO MORE LINE NUMBERS";T=T+2
370 REM TIDY UP AND RETURN CONTROL TO LOWER MEMORY
380dT=T-3
390 ?T=13
400 T?1=255
410 $256=""
420 ?18=#29
430 !13=T+2
440 END
```

(continued from previous page)

action is necessary and the execution of the statement can continue.

The final condition is when a Goto or Gosub involves a label. The interpreter checks to see if the position of that label has been entered in the look-up table — #38D to #3C0 — and providing the value stored is non-zero, execution of the program will continue from the new location.

If the look-up table contains a zero, this means that the label has not yet been encountered and a normal beginning-to-end search must be made before execution can continue. Failure to locate the label produces an error message and halts the program.

Maximum use

Armed with this knowledge, we can now make maximum use of the labels available. Most of the labels we use will need to be dedicated to one particular line but there are many situations where a label can be used repeatedly in different positions.

This particular use of labels must involve entry by normal progression from one line to the next so that the label is set or reset automatically and the Goto will be a backwards jump to the last set position.

This situation occurs frequently in most programs and the same label can be used every time. I usually reserve x for this purpose. A typical case would be validity checking of input which may go something like this:

```
100 PRINT "PHASORS LOCKED IN"
110xINPUT "HOW MUCH ENERGY TO FIRE"
120 IF I>E;PRINT "TOO MUCH!! YOU ONLY HAVE "E" UNITS";G.x
130 IF I>1000;PRINT "TOO HIGH!! WE WILL OVERHEAT";G.x
140 IF I<10;PRINT "NOT ENOUGH TO WARM THE VALVES UP";G.x
150 PRINT "O.K."
```

Once the program reaches line 150, the label becomes redundant until the next time you invoke the phasors routine, when it will be reset anyway. I have a labyrinth program where I use the x label more than 12 times and so make a considerable saving on normal use.

One problem associated with using labels is that of tracing bugs which always manage to find a way into even the shortest of programs. Of course, the longer the program, the more bugs. This problem can be greater when using labels because a Goto or Gosub to a label ignores the line number which would

normally be stored for reference by the error routine, thus leaving the previously-stored line number intact. Acorn covers this by saying that an error message tells you where it thinks the error has occurred which may be several jumps from the actual error.

If you have already examined the Long Lines program, you will have seen the special label on the first line. It is the inverse-square open bracket and it is special because it is not zeroed like the rest but is left set to whatever value was there when switched on, unless that value has already been used elsewhere.

The label will be reset when a line number containing it is met or it may be set directly by typing.

!#3C1=#XXXX

where #XXXX is the position in memory where the label is, or could be. It does not actually need to be there providing the space does not contain another character which is essential to the Basic statement.

This opens up the possibility of a Goto of a Gosub to the middle of a line which as far as I know is not possible on any other make of computer. Try the following sequence.

```
NEW
10 END : PRINT "HELLO THERE"
!#3C1=#29081 #8208 for unexpanded Atom)
GOTO [ ]
```

End statement

There is no other way to pass the End statement in this line. If the Long Lines program is entered into screen memory starting at #8200, the #XXXX will be #8203. An easier way to remember is to follow the usual sequence for entering programs into the graphics memory,

?18=#82 — enter graphics memory

```
NEW
LOAD "LONG LINES"
```

RUN

press BREAK
NEW — or OLD if you have a program in lower memory

You are now back in normal text memory where you can enter your own program while the long lines program stays intact with the label set. Type your program in the normal way until you reach a line that will not fit into the 64 characters allowed by the Atom, then type

GOTO [] or G. []

You will be asked for a start-line number

and step value and you can then continue typing in your program. The difference is that now you have auto-line numbering and the capability of typing individual lines with a length of up to half a screen.

These lines will be added to the end of your program with the Top marker adjusted accordingly. To return to normal program entry, press Return when a new line number is presented; do not use Esc. Ensure that your long lines are exactly right before pressing return as the program does not allow you to edit existing lines or insert new lines into a program — that is for the mark II version.

Beyond normal capacity

You will find that your program will Save, Load, List and Run normally with the long lines intact and you will be able to edit and insert normal-length lines in the usual way. Most Basic statements will work perfectly in long lines but remember that you are pushing the system beyond its normal capacity and strange things may happen.

For instance, an Input statement with a very long message built into it will print out the message in full but forget that it is supposed to be inputting. Also, a very long arithmetic expression will miscalculate its sums but continue without realising it. The limit in both these cases seems to be about 125 characters which is nearly twice the normal number.

These are the only two that I have found so far but there may be others, multiple If, And, Or statements are a possible candidate. These can be broken down where possible into smaller separate statements in a multi-statement line. For example:

```
200 IF A=0 AND B=0 AND C=0 AND D=0
    THEN D=10
```

Is equivalent to

```
200 IF A=0; IF B=0; IF C=0; IF D=0; D=10
```

The Long Lines program is very useful for entering large quantities of Print statements such as instructions, where you often find that you have split a word between two lines. A useful tip to prevent this is to type the word Print, or P., and the opening double quotation marks. Then move the cursor with the cursor-control keys to the beginning of the next line before typing a string of characters for output. This way you can see exactly how it will look at run time while you are typing it in, making centring and column alignment far easier. ■

The Essential Software Company

Not Only
30 Programs for
the Sinclair
ZX 81:1K -



Machine Language Programming Made Simple for the Sinclair -

A complete beginner's guide to the computer's own language - Z80 machine language. Machine language programs enable you to save on memory and typically give you programs that run 10-30 times faster than BASIC programs.

Sinclair ZX 81 ROM Disassembly

by DR. I. LOGAN.

The definitive book for the programmer that needs those answers about the Sinclair ZX 81 ROM.



ESSENTIAL ZX81

Not only over 30 programs, from arcade games to the final challenging Draughts playing program, which all fit into the unexpanded 1K Sinclair ZX 81 but also notes on how these programs were written and special tips! Great value!

Understanding Your ZX 81 ROM -

A brilliant guide for more experienced programmers by Dr. Ian Logan, this book illustrates the Sinclair's own operating system and how you can use it. Includes special section on how to use machine code routines in your BASIC programs.

The Complete Sinclair ZX 81 BASIC Course

At last, a comprehensive text for your Sinclair ZX 81! The complete BASIC Course is a manual which will immediately become an indispensable work of reference for all your ZX 81 programming.

Order Form:

Orders to
The Essential Software Company, Dept BT
(Visconti Ltd.) 01 837 3154
47 Brunswick Centre, London WC1N 1AF



| | | |
|----------------|--|---------------------------------|
| NAME: | The Complete Sinclair ZX 81 BASIC Course | £17.50 <input type="checkbox"/> |
| ADDRESS: | Basic Course | |
| | Programs on Cassette | £ 2.50 <input type="checkbox"/> |
| | Sinclair ZX 81 ROM Disassembly | |
| | Part A - 0000H-0F54H | £ 7.00 <input type="checkbox"/> |
| | Not Only 30 Programs/Sinclair ZX 81:1K | £ 6.95 <input type="checkbox"/> |
| | Machine Language Programming Made Simple | £ 8.95 <input type="checkbox"/> |
| | Understanding Your ZX 81 ROM | £ 8.95 <input type="checkbox"/> |
| | Postage and Packing | £ 0.70 |
| | Postcode | Remittance enclosed |

REGISTERED REFERRAL CENTRE
FOR THE BBC PROJECT

BEEBUG FOR THE BBC MICRO

INDEPENDENT NATIONAL USER
GROUP FOR THE BBC MICRO

IF YOU OWN A BBC MACHINE, OR HAVE ORDERED ONE, OR ARE JUST THINKING ABOUT GETTING ONE, THEN YOU NEED BEEBUG.

BEEBUG runs a regular magazine devoted exclusively to the BBC Micro (10 issues per year).

New program listings in each issue:

3.D. Noughts and Crosses and Full Colour Moon Lander in April issue.

Latest news on the BBC project.

What you should know before you order your machine.

Hardware and Software Hints and Tips: **What the Manual doesn't tell you.**

How to upgrade the A option.

How to add joysticks and games paddles.

Beginners Guide to Basic starting in the April issue.

Reviews of the latest software.

Discount software and hardware.

Regular advice Clinic to answer your queries.

BEEBUG Software Competition with Cash Prizes.

All this and much more when you join BEEBUG.

Membership:

Introductory offer

6 months £4.50

1 year £8.50

S.A.E. for further details

BEEBUG

35 St. Julians Rd.
St. Albans
Herts.

Moi

Mine of Information Ltd
Microcomputer Consultancy & Booksellers

ZX

OTHELLO™

A major game of strategy
for the Sinclair ZX81
personal computer +
16KB RAM



- * Easy to learn
- * For ages 7 to 107
- * Pit your wits against an inhuman intelligence!
- * Nine levels of play from novice to expert

£10

SEND FOR OUR FREE CATALOGUE OF
100 SELECTED MICROCOMPUTER BOOKS

Prices include P.P in UK

Add 20% for delivery to Europe, Africa or the Middle East
Orders to: Moi (222) 1 Francis Avenue · St Albans · Herts
AL3 6BL · England · Phone 0727 52801 · Telex 925859

Its peculiar blend of skill and luck marks Nim out as a perfect candidate for computerisation. David Lawrence's version of the board game is for the expanded ZX-81.

WRITING A PROGRAM to play Nim raises some interesting questions about the quality of play you want your micro to exhibit. This is not the shortest Nim program possible, first, because it is written in such a way as to make its method of working transparent and secondly, because it contains a graphics representation of the game as it progresses, together with error messages for illegal moves.

The secret of playing Nim is a form of binary arithmetic which goes as follows. To make the best move it is first necessary to translate the number of counters in each pile into a binary representation, then add the binary numbers without carry.

Thus, if a game has arrived at a state where there are three piles of 8, 7 and 1 respectively, their binary representations would be 1000, 0111 and 0001. Proper binary addition would result in the answer 10000 but adding them together without a carry results in 1112.

To win a game of Nim your move must result in a position where the binary sum of what is left contains only even numbers including zero. If there are piles of 8, 7 and 1 counters when your turn arrives, then you can win. If you leave the game in that state after

your move, then a good player will beat you because there are odd numbers in the binary sum.

Clearly, you cannot transform each of the 1s in the binary sum to zero to calculate the winning move. That would involve removing $8+4+2$ from a single pile and there is no single pile with 14 counters. The answer is to find a pile which, when represented in binary, contains a 1 in the same position as the leftmost odd number in the binary sum.

In the case of our example, the leftmost odd number in the binary sum is in the 8 position and the only pile with a 1 in the 8 position when represented in binary is the pile that actually has eight counters so that is the pile to alter.

Removing eight from the pile does not, however, solve the problem, since it would not rid us of the odd numbers in the 4 and 2 positions of the binary sum. The solution is simple: starting from the 8 position, record -8 — which rids us of one odd number — and move to the right along the binary sum and the decimal representation of the pile.

In the 4 position we find an odd number in the decimal sum, so a change has to be made to that position in one of our piles. The rule is that looking at the pile we have decided to work with, if there is a 1 in the position we want to change, then we record whatever that position represents as a minus. If there is a zero in the position that must be changed, we record the number represented by the position as a plus.

In the case of our eight pile we have now

recorded -8 and +4. The 2 position in the binary sum also has to be changed and, following the same procedure, we record +2. The 1 position in our binary sum does not have an odd number, so we do not wish to make any change to our pile in the 1 position.

We have now reached the end of the binary sum and have recorded three numbers, -8, +4 and +2. Adding them together gives us -2 and that is the move we need to make. It will result in piles which, represented in binary, will be 0110, 0111 and 0001. Adding them together without carry gives us a binary sum of 0222 and that is a winning position provided that we follow the same procedure on subsequent moves.

Binary sum

The Nim program calculates the binary sum in the subroutine at 1260. In the subroutine at 1400 the leftmost odd number is recorded in one string, U\$, and the other positions that need to be changed in V\$. After this, the subroutine at 2330 finds a suitable pile to be altered, the necessary move is translated back from binary at 1600 and following, then the move is made from 1680.

If the program plays perfectly, then someone who understands the method and is prepared to use it fully on every move can still win, as long as they move first but anyone else will lose every time, which becomes a trifle boring. The program attempts to avoid this by not playing a perfect game.

The subroutine at 2330 does not, in fact, choose unerringly the correct pile to be

NIM FOR THE ZX-81.....

```

1000 GOTO 1030
1010 SAVE 'NIM'
1020 STOP
1030 GOSUB 2510
1040 GOSUB 1760
1050 GOSUB 1900
1060 IF G(1)+G(2)+G(3)+G(4)+G(5)=0 THEN PRINT "ROTTER. YOU WON."
1070 IF G(1)+G(2)+G(3)+G(4)+G(5)=0 THEN STOP
1080 GOSUB 1280
1090 IF G(1)+G(2)+G(3)+G(4)+G(5)=0 THEN PRINT "TEE-HEE. I WON."
1100 IF G(1)+G(2)+G(3)+G(4)+G(5)=0 THEN STOP
1110 IF U$="00000" THEN GOSUB 2220
1120 GOTO 1050
1130 CLS
1140 FOR I=1 TO 29 STEP 7
1150 FOR K=G(I/7+1) TO 1 STEP -1
1160 PRINT AT 20-K,I;"0"
1170 NEXT K
1180 PRINT AT 3,I-1;"( ";G(I/7+1);")"
1190 PRINT AT 20,I;CHR$(157+I/7)
1200 NEXT I
1210 RETURN
1220 PRINT AT 0,0;"32 spaces"
1230 PRINT AT 0,16;"32 spaces"
1240 RETURN
1250 REM *****
1260 REM BINARY SUM
1270 REM *****
1280 LET B2=0
1290 FOR I=1 TO 5
1300 LET T$="00000"
1310 LET N=G(I)
1320 FOR J=5 TO 1 STEP -1
1330 IF N/2<>INT(N/2) THEN LET T$(J)="1"
1340 LET N=INT(N/2)
1350 NEXT J
1360 LET B1=VAL(T$)
1370 LET B2=B2+B1
1380 NEXT I
1390 REM *****
1400 REM BINARY SUBTRACT
1410 REM *****
1420 LET S$=STR$(B2)
1430 LET T$="00000"
1440 LET T$(6-LEN S$ TO 5)=S$
1450 LET U$="00000"
1460 FOR I=1 TO 5
1470 LET N=VAL(T$(I))
1480 IF N/2<>INT(N/2) THEN GOTO 1510
1490 NEXT I

```

```

1500 RETURN
1510 LET U$(I)="1"
1520 LET V$="00000"
1530 FOR J=I+1 TO 5
1540 LET N=VAL(T$(J))
1550 IF N/2<>INT(N/2) THEN LET V$(J)="1"
1560 NEXT J
1570 GOSUB 2330
1580 LET S=0
1590 REM *****
1600 REM TRANSLATE FROM BINARY
1610 REM *****
1620 FOR I=5 TO 1 STEP -1
1630 IF U$(I)<>"0" THEN LET S=S+2**(5-I)
1640 IF V$(I)="1" AND W$(I)="0" THEN LET S=S-2**(5-I)
1650 IF V$(I)="1" AND W$(I)="1" THEN LET S=S+2**(5-I)
1660 NEXT I
1670 REM *****
1680 REM ADJUST PILES
1690 REM *****
1700 PRINT AT 0,0;"I WILL TAKE ";S;" FROM PILE ";P
1710 PAUSE 100
1720 POKE 16437,255
1730 LET G(P)=G(P)-S
1740 GOSUB 1130
1750 RETURN
1760 REM *****
1770 REM SET PILES INITIALLY
1780 REM *****
1790 DIM G(5)
1800 LET G(1)=INT(RND*13)
1810 LET G(2)=INT(RND*13)
1820 LET G(3)=INT(RND*(27-G(1)-G(2)))
1830 IF G(3)>16 THEN LET G(3)=16
1840 LET G(4)=INT(RND*(30-G(3)-G(2)-G(1)))
1850 IF G(4)>16 THEN LET G(4)=16
1860 LET G(5)=32-G(4)-G(3)-G(2)-G(1)
1870 IF G(5)>16 THEN GOTO 1800
1880 GOSUB 1130
1890 RETURN
1900 REM *****
1910 REM ACCEPT MOVE
1920 REM *****
1930 PRINT AT 0,0;"WHICH PILE?";
1940 INPUT M1
1950 PRINT M1
1960 IF M1<6 AND M1>0 THEN GOTO 2020
1970 PRINT AT 0,0;"THERE ARE ONLY FIVE PILES."
1980 PAUSE 100
1990 POKE 16437,255

```

(listing continued on next page)

altered; it simply picks the first one that looks likely to be the correct pile. Usually, it will be right and will play an unbeatable game. If, however, you can see from experience where it tends to go wrong, you can play to its weaknesses, even if you are in a losing position, making it more like a game against a human opponent.

Another solution is to allow the program to calculate a perfect move every time but introduce random mistakes. This can be achieved by replacing lines 2370 to 2400 with the following:

```
2365 LET N1=6-I
2370 FOR I=1 TO 5
2375 LET N2=G(I)
2380 FOR J=1 TO N1-1
2385 LET N2=INT(N2/2)
2390 NEXT J
2400 IF N2/2 <> INT(N2/2) THEN GOTO 2430
```

Making these changes will result in the program playing perfectly. A further line

```
1455 IF RND < .2 THEN GOSUB 2220
```

will produce a random move every five moves or so — more if you replace .2 with a larger figure.

One final change you might like to make is to increase the speed of the game when you are in a winning position. The program as given assumes that you are in a winning position. Its best tactic is to take only one counter, thus prolonging the game as much as possible and giving you time to make a mistake. This is done by the routine at 2230. Altering line 2300 to read

```
LET S=INT(RND*G(P))+1
```

results in more counters being taken and a shorter game.

(listing continued from previous page)

```
2000 GOSUB 1220
2010 GOTO 1930
2020 IF G(M1)>0 THEN GOTO 2080
2030 PRINT AT 0,16;"NOTHING IN THAT PILE."
2040 PAUSE 100
2050 POKE 16437,255
2060 GOSUB 1220
2070 GOTO 1930
2080 PRINT AT 0,16;"HOW MANY?";
2090 INPUT M2
2100 PRINT M2
2110 IF M2>0 AND M2<=G(M1) THEN GOTO 2170
2120 PRINT AT 0,16;"YOU CANT.<2 spaces>"
2130 PAUSE 100
2140 POKE 16437,255
2150 GOSUB 1230
2160 GOTO 2080
2170 LET G(M1)=G(M1)-M2
2180 PAUSE 100
2190 POKE 16437,255
2200 GOSUB 1130
2210 RETURN
2220 REM *****
2230 REM SAFE POSITION
2240 REM *****
2250 LET S=0
2260 FOR I=1 TO 5
2270 IF G(I)>S THEN LET S=I
2280 IF G(I)>S THEN LET S=G(I)
2290 NEXT I
2300 LET S=1
```

```
2310 GOSUB 1670
2320 RETURN
2330 REM *****
2340 REM PILE TO BE ALTERED
2350 REM *****
2360 LET PILE=2*(5-I)
2370 FOR I=1 TO 5
2380 IF G(I)=PILE AND G(I)<2*PILE THEN GOTO 2430
2400 IF G(I)-PILE >=2*PILE THEN GOTO 2430
2410 NEXT I
2420 STOP
2430 LET P=I
2440 LET W="00000"
2450 LET C=G(P)
2460 FOR I=1 TO 5
2470 IF C/2<INT(C/2) THEN LET W*(6-I)="1"
2480 LET C=INT(C/2)
2490 NEXT I
2500 RETURN
2510 REM *****
2520 REM INSTRUCTIONS
2530 REM *****
2540 PRINT "I WILL DISPLAY FIVE PILES OF", "COUNTERS.
ON EACH MOVE YOU CAN", "TAKE ANY NUMBER OF
COUNTERS,UP", "TO AND INCLUDING ALL OF THEM--", "BUT
ONLY FROM ONE PILE.", "THE WINNER IS THE ONE TO
TAKE", "THE LAST COUNTER."
2550 PRINT
2560 PRINT "PRESS NEWLINE TO CONTINUE."
2570 INPUT A$
2580 RETURN
```

AND FOR THE APPLE


Sean Overend has adapted Nim for the Apple II to cater for beginners and advanced players alike.

AFTER THE CHOICE of board size has been made by the player, the computer displays the randomly-selected pieces and gives the player the opportunity of starting. If the player fails to choose within the short time available for the decision, the computer will start.

The computer displays the state of the board after each move by the player and by itself. Games have to be played through to the bitter end — this is no hardship as the Return key need only be used once in the whole program, when the player's name is entered. Cumulative scores are displayed and you have an opportunity to change the board size, before entering a newly-shuffled game.

Now let us examine the mechanics. As might be expected, the current state of the board is stored in a one-dimensional array A. The board size is the variable Z, shown on the screen as N. The random shuffle is performed at lines 350 to 370. The code for the timed decision "Who starts?" is at lines 390 and 400. Execution is looped Z×100 times through a check of the contents of keyboard input data location — decimal 49152 on the Apple.

Subroutines 900, 1020 and 1140 are straightforward in that they merely request and check for validity the input of the player's move

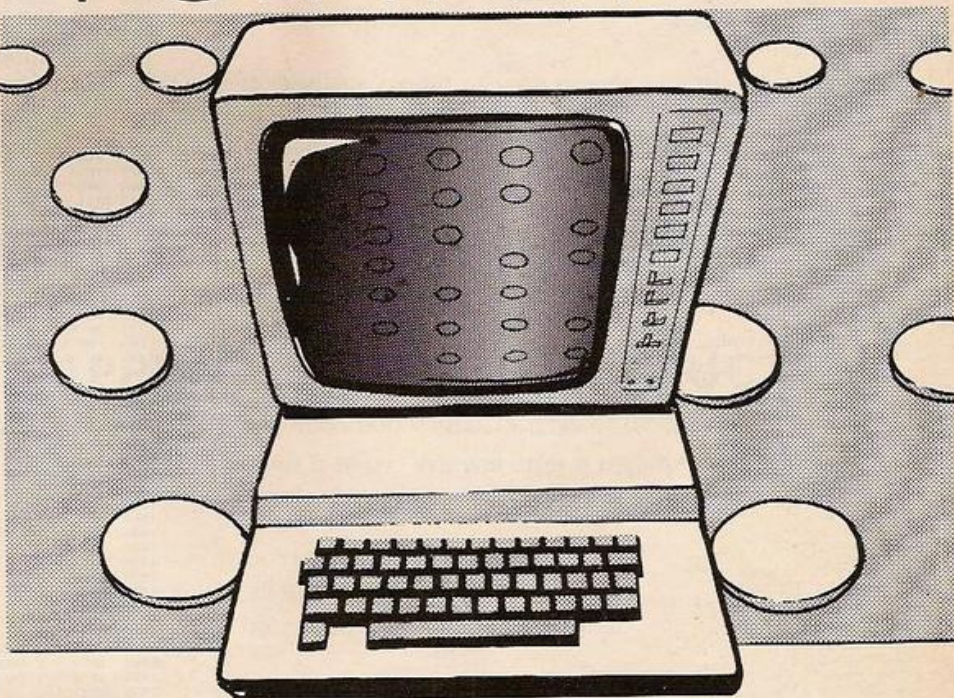

which consists of row and number of pieces to be taken. They then output the current state of the board on the screen.

The interesting part of the program is the code that chooses the computer's move. To understand it, you need to know the secret of the Nim strategy. Fundamentally, the tech-

nique is to move in such a way that you leave an even number of each power of two, unless you have reached the end-game.

To calculate the powers of two, you need to analyse each row into its constituent binary digits. Thus * is 2⁰; *** is 2¹+2⁰; ***** is

(continued on next page)

(continued from previous page)

$2^2 + 2^1 + 2^0$ and so on. You then sum the total number of 2^2 in the whole board, the total number of 2^1 and the total number of 2^0 . The move that will win is one that will leave an even number of each power of two on the board. The exception is the end-game, where you leave single pieces — that is, * or 2^0 — in all remaining rows. Obviously, if you want the computer to take the last piece, you must leave an odd number of single pieces.

To return to the program, lines 460 to 510

see if the end-game is in sight by counting the rows with only one piece, S, and the total number of rows remaining, L. If $S=L$ or $S+1=L$, you are at the end-game stage and the code is drawn appropriately, including the final win/lose position and the accumulation of the game scores. CO is the computer's score, SC the player's.

If you have not reached the end-game, execution passes to line 840, where the power-of-two computer-move subroutine at line 1270 is called. This subroutine first calculates

whether the board has an even number of each power of two, using for the purposes variables P0, P1 and P2 as Boolean, or truth, variables at lines 1290 to 1480.

If the board has an even number of each power of two, line 1010, then any move will have to be made — lines 2040 to 2090. If the board is uneven, however, then the appropriate balancing moves are calculated and made, the code for which is divided in the program for convenience into groups defined by the number of odd totals of powers of two.

```

0 REM NIM PROGRAMME - COPYRIGHT SEAN OVEREND FEB 1981
10 HOME
20 HOME 30,171 INVERSE: PRINT "NIM": NORMAL
30 PRINT "THE OBJECT OF THIS GAME IS TO MAKE THE"
40 PRINT "OTHER PLAYER TAKE THE LAST PIECE OF ALL"
50 PRINT: PRINT
60 PRINT "THERE ARE 'N' ROWS, EACH OF WHICH MAY"
70 PRINT "CONTAIN UP TO 'N' PIECES. (N=8)"
80 PRINT "WHEN IT'S YOUR TURN, YOU MAY TAKE AS"
90 PRINT "MANY PIECES FROM ANY ONE ROW AS YOU"
100 PRINT "LIKE. YOU WILL BE ASKED FOR THE ROW"
110 PRINT "YOU WANT TO TAKE FROM FIRST. THEN THE"
120 PRINT "NUMBER TO BE TAKEN FROM THAT ROW"
130 PRINT: PRINT
140 PRINT "THE COMPUTER WORKS OUT ITS MOVE RATHER"
150 PRINT "QUICKLY. AND THEN DISPLAYS THE BOARD"
160 PRINT "AS IT APPEARS AFTER ITS MOVE"
170 PRINT: PRINT
180 PRINT "REMEMBER, HE WHO TAKES THE LAST PIECE"
190 INVERSE: PRINT "LOSES": NORMAL
200 PRINT "TYPE ANY KEY WHEN YOU ARE READY"
210 GET A$: PRINT CHR$(10)
220 HOME: PRINT: PRINT: PRINT
222 PRINT "YOU WILL SHORTLY BE ASKED IF YOU WISH"
223 PRINT "TO START. TYPE 'Y' QUICKLY, IF YOU DO"
224 PRINT "OTHERWISE YOU WILL LOSE THE CHANCE."
225 PRINT "YOU GET MORE TIME TO ANSWER THE"
227 PRINT "QUESTION. THE BIGGER THE BOARD"
228 PRINT: PRINT: PRINT "FIRST, TWO OTHER QUESTIONS: "; PRINT
230 INPUT "WHAT IS YOUR NAME? "; NAME: PRINT
240 DIM A(7)
250 PRINT "CHOOSE THE SIZE OF THE BOARD. "; N$:
260 PRINT "ANY NUMBER BETWEEN 3 AND 7"
270 PRINT: PRINT "N="; GET A$: PRINT A$
280 Z = VAL(A$)
290 IF Z < 3 OR Z > 7 THEN PRINT CHR$(13); GOTO 250
300 GOTO 350
310 PRINT: PRINT "COMPUTER 'CO' NAME 'SC': PRINT
320 PRINT: PRINT "NEW GAME": PRINT
330 PRINT "DO YOU WANT A BOARD SIZE CHANGE? (Y/N)"; GET A$: PRINT A$: PRINT

340 IF A$ = "Y" THEN GOTO 270
350 FOR I = 1 TO Z
360 A(I) = INT(RND(1) * Z) + 1
370 NEXT I
380 GOSUB 1140
390 PRINT: PRINT "DO YOU WANT TO START? ";
395 FOR I = 1 TO Z * 100
396 Y = PEEK(49152)
397 IF Y = 128 THEN GET A$: PRINT A$: GOTO 400
398 NEXT I
399 PRINT CHR$(13); GOTO 450
400 IF A$ = "Y" THEN 450
410 GOSUB 900
420 GOSUB 1020
430 A(R) = A(R) - N
440 GOSUB 1140
450 S = O(L) = 0
460 FOR I = 1 TO Z
470 IF A(I) = 0 THEN GOTO 510
480 IF A(I) = 1 THEN GOTO 500
490 L = L + 1: GOTO 510
500 S = S + 1: L = L + 1
510 NEXT I
520 IF S = L THEN GOTO 560
530 IF S + 1 = L THEN GOTO 700
540 GOTO 840: REM NOT ENOUGH
550 IF S = 0 THEN GOTO 620
560 IF S = 1 THEN GOTO 660
570 FOR I = 1 TO Z: REM NO CHOICE
580 IF A(I) = 0 THEN GOTO 610
590 A(I) = A(I) - 1
600 GOTO 850
610 NEXT I
620 REM PLAYER LOSES
630 HOME: CO = CO + 1
640 PRINT TAB(15); FLASH: PRINT "YOU LOSE": NORMAL
650 GOTO 310
660 REM COMPUTER LOSES
670 HOME: PRINT: PRINT "SC = SC + 1"
680 PRINT TAB(15); FLASH: PRINT "YOU WIN": NORMAL
690 GOTO 310
700 REM WINNABLE ENDGAME
710 IF S / 2 = INT(S / 2) THEN GOTO 780
720 REM S IS ODD
730 FOR I = 1 TO Z
740 IF A(I) < 1 THEN GOTO 770
750 A(I) = 0
760 GOTO 850
770 NEXT I
780 REM S IS EVEN
790 FOR I = 1 TO Z
800 IF A(I) < 1 THEN GOTO 850
810 A(I) = 1
820 GOTO 850
830 NEXT I
840 GOSUB 1270
850 PRINT: PRINT
860 PRINT "MY MOVE IS "; PRINT
870 GOSUB 1140
880 GOTO 410
890 REM *****
900 REM SUBROUTINE INPUT PLAYERS ROW
910 REM *****
920 PRINT: PRINT
930 PRINT "YOUR MOVE"
940 PRINT: PRINT "WHICH ROW? ";
950 GET R$: R = VAL(R$)
960 PRINT R$
970 IF R > Z OR R < 1 THEN 990
980 IF A(R) < 1 THEN 1000
990 PRINT "INVALID NUMBER, TRY AGAIN": GOTO 940
1000 RETURN
1010 REM *****
1020 REM SUBROUTINE INPUT PLAYERS NUMBER
1030 REM *****
1040 PRINT "HOW MANY? ";
1050 GET N$: N = VAL(N$)
1060 PRINT N$
1070 PRINT N$
1080 PRINT
1090 IF N < 1 OR N > 1 THEN GOTO 1120
1100 PRINT "INVALID NUMBER, TRY AGAIN"
1110 GOTO 1050
1120 RETURN
1130 REM *****
1140 REM SUBROUTINE DISPLAY STATE
1150 REM *****
1160 FOR I = 1 TO Z
1170 J = A(I)
1180 IF J = 0 THEN GOTO 1250
1190 PRINT " "
1200 PRINT I: " "
1210 FOR K = 1 TO J
1220 PRINT " * "
1230 NEXT K
1240 PRINT
1250 NEXT I
1260 RETURN
1270 REM *****
1280 REM COMPUTER'S MOVE *****
1290 P0 = O(P) = 0: P2 = 0
1300 GOTO 1450: REM SKIP SUBROUTINES
1310 REM SUB1
1320 P0 = NOT P0: RETURN
1330 REM SUB2
1340 P1 = NOT P1: RETURN
1350 REM SUB3
1360 P1 = NOT P1: P0 = NOT P0: RETURN
1370 REM SUB4
1380 P2 = NOT P2: RETURN
1390 REM SUB5
1400 P2 = NOT P2: P0 = NOT P0: RETURN
1410 REM SUB6
1420 P2 = NOT P2: P1 = NOT P1: RETURN
1430 REM SUB7
1440 P2 = NOT P2: P1 = NOT P1: P0 = NOT P0: RETURN
1450 FOR I = 1 TO Z
1460 IF A(I) < 0 THEN GOTO 1480
1470 ON A(I) GOSUB 1310,1330,1350,1370,1390,1410,1430
1480 NEXT I
1490 GOTO 2000
1500 REM TRICKY BIT
1510 REM SINGLE POWER SUBROUTINE
1520 IF P1 OR P2 THEN GOTO 1590
1530 REM POW0
1540 FOR I = 1 TO Z: X = A(I)
1550 IF X / 2 < INT(X / 2) THEN 1570
1560 NEXT I
1570 A(I) = A(I) - 1
1580 RETURN
1590 IF P2 THEN GOTO 1660
1600 REM POW1
1610 FOR I = 1 TO Z: X = A(I)
1620 IF X = 2 OR X = 3 OR X = 6 OR X = 7 THEN 1640
1630 NEXT I
1640 A(I) = A(I) - 2
1650 RETURN
1660 REM POW2
1670 FOR I = 1 TO Z: X = A(I)
1680 IF X > 3 THEN 1700
1690 NEXT I
1700 A(I) = A(I) - 4
1710 RETURN
1720 REM TWO POWER SUBROUTINE
1730 IF P0 > 0 THEN GOTO 1790
1740 FOR I = 1 TO Z: X = A(I)
1750 IF X > 5 THEN A(I) = A(I) - 6: GOTO 1780
1760 IF X = 4 OR X = 5 THEN A(I) = A(I) - 2: GOTO 1780
1770 NEXT I
1780 RETURN
1790 IF P1 THEN GOTO 1860
1800 REM POW0 AND POW2
1810 FOR I = 1 TO Z: X = A(I)
1820 IF X = 3 OR X = 7 THEN A(I) = A(I) - 5: GOTO 1850
1830 IF X = 4 OR X = 6 THEN A(I) = A(I) - 3: GOTO 1850
1840 NEXT I
1850 RETURN
1860 REM P0 AND P1
1870 FOR I = 1 TO Z: X = A(I)
1880 IF X = 2 OR X = 6 THEN A(I) = A(I) - 1: GOTO 1910
1890 IF X = 3 OR X = 7 THEN A(I) = A(I) - 3: GOTO 1910
1900 NEXT I
1910 RETURN
1920 REM THREE POWER SUBROUTINE
1930 FOR I = 1 TO Z: X = A(I)
1940 IF X = 4 THEN A(I) = 3: RETURN
1950 IF X = 5 THEN A(I) = 2: RETURN
1960 IF X = 6 THEN A(I) = 1: RETURN
1970 IF X = 7 THEN A(I) = 0: RETURN
1980 NEXT I
1990 RETURN
2000 REM *****
2010 IF NOT P0 AND NOT P1 AND NOT P2 THEN GOTO 2040
2020 ON P0 + P1 + P2 GOSUB 1510,1720,1920
2030 RETURN
2040 REM GOT TO DO SOMETHING
2050 FOR I = 1 TO Z
2060 IF A(I) = 0 THEN GOTO 2090
2070 A(I) = A(I) - 1
2080 GOTO 2100
2090 NEXT I
2100 RETURN

```


MICRO GEN QUALITY PRODUCTS

See us at
Stand V7
THE Computer Fair
Personal computers
Home computing
Small business systems

ZX81 A/D CONVERTER BOARD

This 4-channel analogue to digital converter, originally developed for joystick control, can be used for such applications as measurement of voltage, temperature, light intensity etc.
The board fits in between the RAM pack and the ZX81. (No skill is required to make this connection, and it actually improves the stability of the RAM pack.)
Price now only £18.50

JOYSTICKS FOR THE ZX81, only £9.60 each

- The most exciting add-on ever for the ZX81, free yourself of that dead, unresponsive keyboard.
- 1 or 2 joysticks may be connected via our A/D board.
- Turns your ZX81 into a true programmable games machine.
- Extends the capability of the ZX81, imagine the tremendous variety of games and applications that now become possible.
- Details supplied on how to use the joysticks in your own programs.

Please note that you cannot connect conventional analogue joysticks directly to the digital input ports found on most I/O boards, an A/D convertor such as ours is required.

A free copy of ZX AMAZE plus any one of the games listed below when ordering a joystick and an A/D board.

Programs available

ZX SPACE INVADERS. You've tried the rest, now try the best.

This program has many features including an ever increasing rate of play (they'll get you in the end).

only £3.95

ZX BREAKOUT. Quite simply the best breakout on the market.

Features seven bat angles (you won't find this one easy.)

only £3.95

ZX NEW YORK. A very addictive arcade game.

Bomb and shoot your way out of trouble, otherwise you are doomed to crash. Generates a different pattern, for a different game each time you play. On the reverse of the cassette is ZX REFLEX, find out how fast you really are.

now only £3.95

ZX CHESS. The original and still the best.

* Graphic display of chessboard. * 5 levels of play. * Displays record of your moves and the computers.
* Board can be set up to any position. * Has ability to change sides or level in mid-game. * PLUS. *
CHESS CLOCK on reverse side, records time taken by each player. * Resettable function. * Single key entry.

NOW ONLY £6.50

All our games are written in machine code, and can be used with joysticks or keyboard (except chess, keyboard only). Supplied on cassette with library case.

To allow you to prove to yourself that our products are second to none, MICRO GEN offers the following terms to our customers.

14 DAYS FREE APPROVAL ON ALL PRODUCTS

All money will be refunded if goods are returned in good condition within 14 days of despatch.

If you write a program which is exceptional, please submit it to us. We will offer a royalty if it is suitable.

Please rush me: (tick items required)

MICRO GEN A/D BOARD ☐ £18.50

ZX SPACE INVADERS ☐ £3.95

ZX NEW-YORK ☐ £3.95

MORE DETAILS ☐

JOYSTICK ☐ £9.60

ZX BREAKOUT ☐ £3.95

ZX CHESS ☐ £6.50

Please add 40p towards post and packing on all orders.

Name

Address


Postcode

Cheques and P.O.'s payable to:
MICRO GEN, Dept. YC4
24 Agar Crescent,
Bracknell,
Berks.

ZX81 owners

Protos

Keyboard is here:

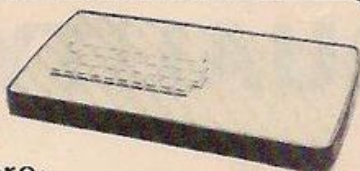

At last! A real, full size keyboard in a top quality case for your ZX-81.

Simply unscrew your ZX-81 printed circuit board from its black Sinclair case and plug into Protos.

FULLY BUILT £64.95 inc. VAT

- More accurate, faster typing with bigger and real keys
- 40 colour coded key-tops for easy reading
- Robust, 'big' computer construction
- PCB prepared for more add-ons to come
- New edge connector provided for Sinclair and other manufacturers' peripherals
- Key legends can be changed for future new ROM functions
- Sinclair PCB fully enclosed — and room for much more

If you feel you've outgrown your ZX-81 don't sell it for peanuts and move to another system. Add it to Protos and make your ZX-81 grow.

For details, large SAE, please. For orders add £2.80 post and packing. Cheques to 'Frome Computing'.

Protos Computer Systems

Frome
Computing,
20 Ashtree
Road, Frome,
Somerset,
BA11 2SF



BARGAIN BYTES

**FOR THE 16K ZX81
UNBEATABLE VALUE!
CASSETTE OF 8 PROGRAMS (50K+) —
For fun and fortune —
no programming knowledge needed!
ONLY £5**

DEEP SEA ADVENTURE (14K). Discover the treasure chest before you run out of gold or strength. Levels of play from "difficult" to "downright impossible". Also has "Save Game" feature.

BANK ACCOUNT (13½K). Invaluable for controlling your finances. Produces detailed statements and can also keep track of credit card spending.

UNDERGROUND ADVENTURE (6½K). Battle against monsters and obstacles underground. A very difficult and challenging task.

DEPTHCHARGE (2½K). A skilful moving graphics game. Fire your depthcharges to blow up enemy submarines before they destroy your ship.

HANGMAN (11½K). The old family game based on a library of 500 words. Excellent graphics.

LOAN (2½K). Calculates repayments, time, sum borrowed or interest. For Bank Loans or Mortgages.

CODEBREAKER (2K). You have ten guesses at the four digit number held by the computer.

FOREIGN CURRENCY (3K). How many dollars is £110? How many Francs is \$38? See what your money will buy around the world!

ORDER NOW!

For convenience simply quote YC3 and your name and address on the reverse of your cheque/postal order, and your software (on TDK cassette) will then be despatched, first class post, complete with comprehensive instructions.

Send to:

**Richard Shepherd, 22 Green Leys,
Maidenhead, Berkshire, SL6 7EZ.
Telephone: (0628) 21107.**



**Authorised BBC
Computer stockist**

ELTEC SERVICES LTD

The Acorn Specialists

HARDWARE

| | |
|--|----------------------|
| ACORN ATOMS with new keyboards | full range in stock |
| BBC Machine MODELS A & B + accessories | stock expected March |
| Full colour monitors (as used by the BBC) | £299.00 |
| Green screen "Prince" monitors 12" (High Res 24MHz) | £126.00 |
| **NEW** GP100A Printer (improved print, wider paper) | £247.25 |
| ATOM Centronics type printer cable | £18.40 |
| 6522 VIA interface chip | £9.99 |
| 74LS244 Buffer | £3.22 |
| Printer socket for ATOM | £3.60 |
| 4K Floating point ROM | £23.00 |
| **NEW** ACORN 96K single disk pack | £343.85 |
| Disk Buffer Pack & Connector | £11.75 |
| BBC ROM SETS FOR ATOM | £57.50 |
| ATOM Word pack ROM | £30.00 |
| UTILITY ROMS Ext. Basic: Toolchest: RS232 | from £28.00 |
| ATOMCALC ROM (ideal for business) | £39.10 |
| UTILITY ROM SWITCH (any of 4 ROMS-Softswitch) | £57.50 |
| Extra Memory — recommended | perK £3.20 |
| ATOMTEL | £142.00 |

SOFTWARE

| | |
|---|-------------|
| Games Packs 1-9 | each £11.50 |
| Games Pack 10 (10 games for min. ATOM) | £11.50 |
| Soft VDU New character set design | £11.50 |
| Maths Pack 1, Maths Pack 2 | each £11.50 |
| ATOM DATABASE | £11.50 |
| UTILITY PACK 1 Dissembler + Fast COS + Renumber | £11.50 |
| PEKO COMPUTER Simulates a Micro on the screen | £11.50 |
| ATOM Business Cassette by J. Phipps | £8.79 |
| BUG BYTE CHESS (very good version) | £9.00 |
| BUG BYTE 747 FLIGHT SIMULATOR — EXCELLENT! | £8.00 |
| BUG BYTE GALAXIANS | £8.00 |
| ATOM Desk Diary, Address Book and Planner | £11.50 |
| ATOM ADVENTURES Dungeon, House, Intergalactic | £11.50 |
| ATOM SYNTHESIZER (very creative) | £11.50 |
| ATOM LIFE PACKAGE. A fast version of life | £11.50 |
| ATOM FORTH Cassette | £11.50 |
| ATOM FORTH User Guide | £6.00 |
| ATOM WORD TUTOR Pairs, Relations, Sentences. Suitable for Primary School Children | £11.50 |
| ATOM INTRODUCTORY PACK — 4 cassettes: | |
| 1. Interactive Teaching. | |
| 2. Financial Planning. Minicalc and Sales. | |
| 3. Household Phonebook. Learn to touch type. | |
| 4. Games. Attack, Connect 4, Breakout, Memory and Mastermind | £23.00 |

BOOKS

| | |
|--|-------|
| The BBC's "The COMPUTER BOOK" | £6.75 |
| The NEC "30 HOUR BASIC" | £5.50 |
| Practical Programmes for the BBC Computer and the Acorn Atom | £5.95 |
| ATOM Business Book by J. Phipps | £6.95 |
| ATOM Magic Book | £5.50 |
| Getting Acquainted with your ACORN ATOM | £7.95 |


ELTEC SERVICES LIMITED
231 Manningham Lane, Bradford BD8 7HH
Tel: Bradford (0274) 491372

We accept Access and Barclaycard by mail or phone.

All prices include VAT, where applicable.

Add 50p UK p&p for all items EXCEPT large hardware, eg Computers, Monitors, etc., then add £3.00 for a Securicor delivery.

sinclair ZX81 PERSONAL COMPUTER

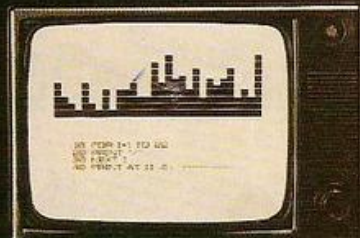

Sinclair ZX81 Personal Computer the heart of a system that grows with you.

1980 saw a genuine breakthrough – the Sinclair ZX80, world's first complete personal computer for under £100. Not surprisingly, over 50,000 were sold.

In March 1981, the Sinclair lead increased dramatically. For just £69.95 the Sinclair ZX81 offers even more advanced facilities at an even lower price. Initially, even we were surprised by the demand – over 50,000 in the first 3 months!

Today, the Sinclair ZX81 is the heart of a computer system. You can add 16-times more memory with the ZX RAM pack. The ZX Printer offers an unbeatable combination of performance and price. And the ZX Software library is growing every day.

Lower price: higher capability

With the ZX81, it's still very simple to teach yourself computing, but the ZX81 packs even greater working capability than the ZX80.

It uses the same micro-processor, but incorporates a new, more powerful 8K BASIC ROM – the 'trained intelligence' of the computer. This chip works in decimals, handles logs and trig, allows you to plot graphs, and builds up animated displays.

And the ZX81 incorporates other operation refinements – the facility to load and save named programs on cassette, for example, and to drive the new ZX Printer.



New BASIC manual

Every ZX81 comes with a comprehensive, specially-written manual – a complete course in BASIC programming, from first principles to complex programs.

Kit: £49.⁹⁵

Higher specification, lower price – how's it done?

Quite simply, by design. The ZX80 reduced the chips in a working computer from 40 or so, to 21. The ZX81 reduces the 21 to 4!

The secret lies in a totally new master chip. Designed by Sinclair and custom-built in Britain, this unique chip replaces 18 chips from the ZX80!

New, improved specification

- Z80A micro-processor – new faster version of the famous Z80 chip, widely recognised as the best ever made.
- Unique 'one-touch' key word entry: the ZX81 eliminates a great deal of tiresome typing. Key words (RUN, LIST, PRINT, etc.) have their own single-key entry.
- Unique syntax-check and report codes identify programming errors immediately.
- Full range of mathematical and scientific functions accurate to eight decimal places.
- Graph-drawing and animated-display facilities.
- Multi-dimensional string and numerical arrays.
- Up to 26 FOR/NEXT loops.
- Randomise function – useful for games as well as serious applications.
- Cassette LOAD and SAVE with named programs.
- 1K-byte RAM expandable to 16K bytes with Sinclair RAM pack.
- Able to drive the new Sinclair printer.
- Advanced 4-chip design: micro-processor, ROM, RAM, plus master chip – unique, custom-built chip replacing 18 ZX80 chips.



Built: £69.⁹⁵


Kit or built – it's up to you!

You'll be surprised how easy the ZX81 kit is to build: just four chips to assemble (plus, of course the other discrete components) – a few hours' work with a fine-tipped soldering iron. And you may already have a suitable mains adaptor – 600 mA at 9 V DC nominal unregulated (supplied with built version).

Kit and built versions come complete with all leads to connect to your TV (colour or black and white) and cassette recorder.



uter-

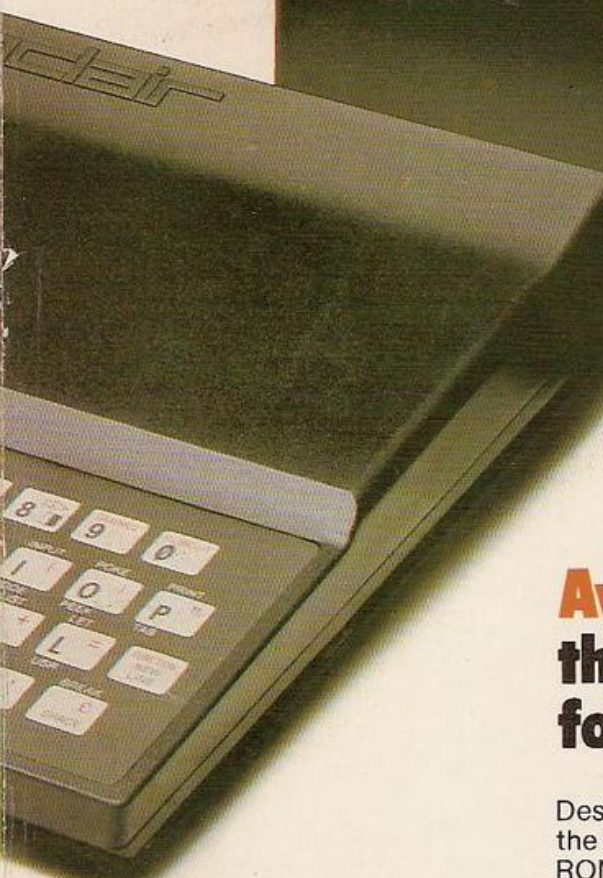

16K-byte RAM pack for massive add-on memory.

Designed as a complete module to fit your Sinclair ZX80 or ZX81, the RAM pack simply plugs into the existing expansion port at the rear of the computer to multiply your data/program storage by 16!


Use it for long and complex programs or as a personal database. Yet it costs as little as half the price of competitive additional memory.

With the RAM pack, you can also run some of the more sophisticated ZX Software – the Business & Household management systems for example.

sinclair

ZX81

6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Tel: (0276) 66104 & 21282.

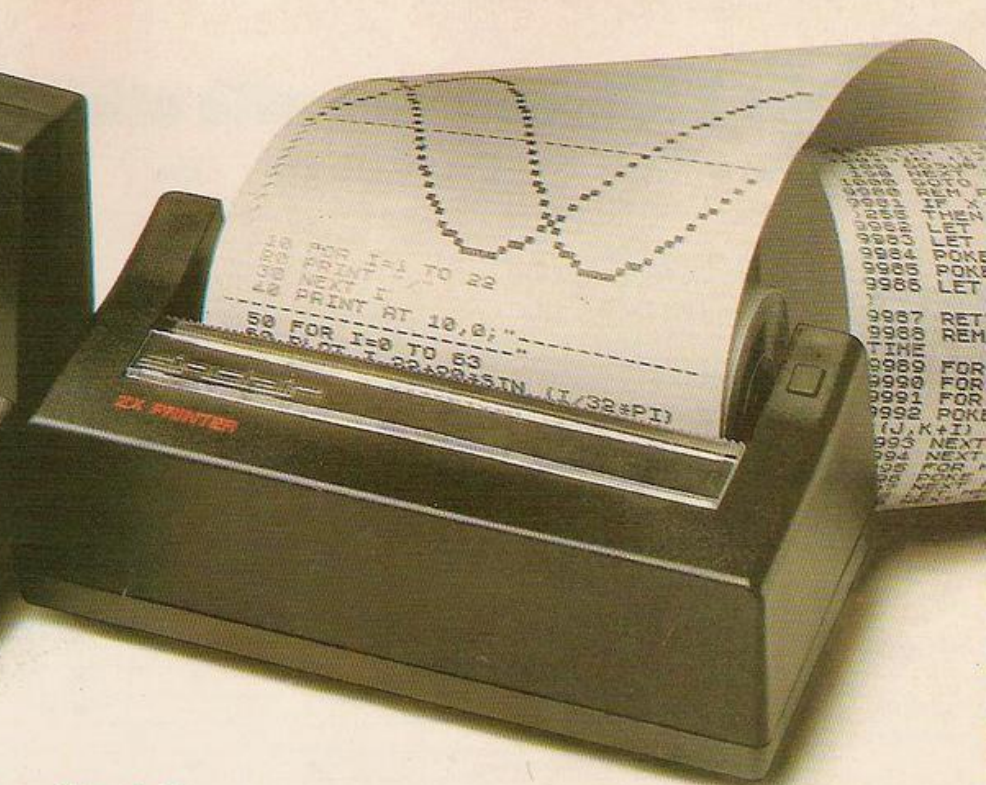

Available now- the ZX Printer for only £49.⁹⁵

Designed exclusively for use with the ZX81 (and ZX80 with 8K BASIC ROM), the printer offers full alpha-numerics and highly sophisticated graphics.

A special feature is COPY, which prints out exactly what is on the whole TV screen without the need for further instructions.

How to order your ZX81

BY PHONE – Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day.

BY FREEPOST – use the no-stamp-needed coupon below. You can pay

At last you can have a hard copy of your program listings – particularly useful when writing or editing programs.

And of course you can print out your results for permanent records or sending to a friend.

Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your computer – using a stackable connector so you can plug in a RAM pack as well. A roll of paper (65 ft long x 4 in wide) is supplied, along with full instructions.

by cheque, postal order, Access, Barclaycard or Trustcard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR.

| Qty | Item | Code | Item price £ | Order Total £ |
|-----|---|------|-----------------|---------------------|
| | Sinclair ZX81 Personal Computer kit(s). Price includes ZX81 BASIC manual, excludes mains adaptor. | 12 | 49.95 | |
| | Ready-assembled Sinclair ZX81 Personal Computer(s). Price includes ZX81 BASIC manual and mains adaptor. | 11 | 69.95 | |
| | Mains Adaptor(s) (600 mA at 9 V DC nominal unregulated). | 10 | 8.95 | |
| | 16K-BYTE RAM pack. | 18 | 49.95 | |
| | Sinclair ZX Printer. | 27 | 49.95 | |
| | 8K BASIC ROM to fit ZX80. | 17 | 19.95 | |
| | Post and Packing. | | | 2.95 |

☐ Please tick if you require a VAT receipt

TOTAL £

*I enclose a cheque/postal order payable to Sinclair Research Ltd, for £

*Please charge to my Access/Barclaycard/Trustcard account no.

*Please delete/complete as applicable.

Please print.

Name: Mr/Mrs/Miss

Address:

FREEPOST – no stamp needed.

YOC 04

How the ZX81 compares with other personal computers

| SYSTEM IDENTIFICATION | | ZX81 | ZX80 | ACORN ATOM | APPLE II PLUS | PET 2001 | TRS 80 LEVEL I | TRS 80 LEVEL II |
|-------------------------|--|------|------|---------------|------------------|-------------|-------------------|--------------------|
| ROM | | 8K | 4K | 8K | 8K | 14K | 4K | 12K |
| GUIDE PRICE | Basic unit - inc. VAT | £70 | £100 | £175 | £630 | £435 | £290 | £375 |
| | Unit plus 16K RAM (*12K RAM) | £120 | £150 | £285* | £630 | £530 | £360 | £375 |
| COMMANDS | LIST, LOAD, NEW, RUN, SAVE | • | • | • | • | • | • | • |
| STATEMENTS | PRINT, INPUT, LET, GOTO, GOSUB/RETURN, FOR/NEXT IF/THEN | • | • | • | • | • | • | • |
| | STEP | • | | • | • | • | • | • |
| | TAB | • | | | • | • | • | • |
| ARITHMETIC FUNCTIONS | ABS, RND | | • | • | • | • | • | • |
| | INT | • | | | • | • | • | • |
| | ATN, COS, EXP, LOG, SGN, SIN, SQR, TAN | • | | | • | • | | • |
| | ARCSIN, ARCOS | • | | | | | | |
| STRING FUNCTIONS | CHR\$ | • | • | | • | • | | • |
| | LEN | • | | • | • | • | | • |
| | ASC(CODE), STR\$, VAL, INKEY\$ | • | | | | • | | • |
| NUMBERS | FLOATING PT $\pm 10^{-28}$ | • | | | • | • | • | • |
| | INTEGERS | | • | • | • | • | | • |
| NUMERIC VARIABLES | A-Z | | | • | | | • | |
| | AA-ZØ | | | | • | • | | • |
| | An-Zn, n = any alphanumeric string | • | • | | | | | |
| STRING VARIABLES | A\$ & B\$ | | | | | | • | |
| | A\$ to Z\$ | • | • | • | | | | |
| | An\$ to Zn\$ n = any alphanumeric character | | | | • | • | | • |
| NUMERIC ARRAYS | SINGLE DIMENSIONAL | | • | • | | | • | |
| | MULTI DIMENSIONAL | • | | | • | • | | • |
| DISPLAY | ROWS | 24 | 24 | 16 | 24 | 25 | 16 | 16 |
| | COLUMNS | 32 | 32 | 32 | 40 | 40 | 64 | 64 |
| | LOW RES GRAPHICS (<7000 pixels) | • | • | • | • | • | • | • |
| | HIRE GRAPHICS (>40000 pixels) | | | • | • | | | |
| SPECIAL FEATURES | USR (CALL, LINK) | • | • | • | • | • | | • |
| | PEEK, POKE (OR EQUIV) | • | • | • | • | • | | • |

Sinclair software on cassette.




The unprecedented popularity of the ZX Series of Sinclair Personal Computers has generated a large volume of programs written by users.

Sinclair has undertaken to publish the most elegant of these on pre-recorded cassettes. Each program is carefully vetted for interest and quality, and then grouped with others to form single-subject cassettes.

Software currently available includes games, junior education, and business/household management systems. You'll receive a Sinclair ZX Software catalogue with your ZX81 - or see our separate advertisement in this magazine.

The ultimate course in ZX81 BASIC programming.

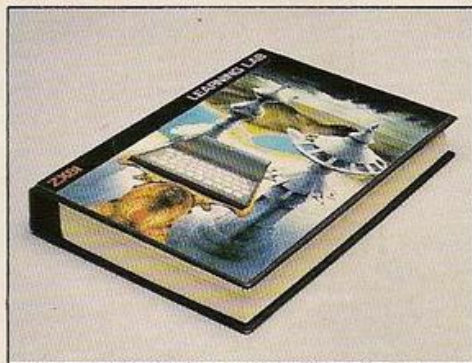


Some people prefer to learn their programming from books. For them, the ZX81 BASIC manual is ideal.

But many have expressed a preference to learn *on the machine, through the machine*. Hence the new cassette-based ZX81 Learning Lab.

The package comprises a 160-page manual and 8 cassettes. 20 programs, each demonstrating a particular aspect of ZX81 programming, are spread over 6 of the cassettes. The other two are blank practice cassettes.

Full details with your Sinclair ZX81.

If you own a Sinclair ZX80...

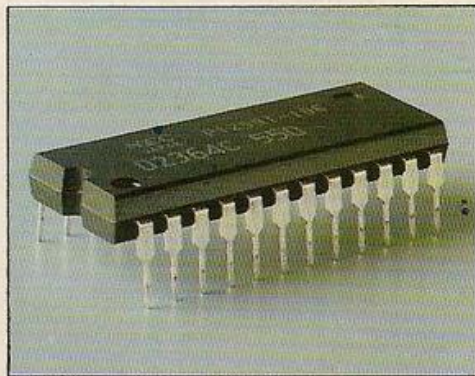

The new 8K BASIC ROM used in the Sinclair ZX81 is available to ZX80 owners as a drop-in replacement chip. (Complete with new keyboard template and operating manual.)

With the exception of animated graphics, all the advanced features of the ZX81 are now available on your ZX80 - including the ability to drive the Sinclair ZX Printer.

sinclair

ZX81

6 Kings Parade, Cambridge, Cambs., CB2 1SN.
Tel: (0276) 66104 & 21282.

VIC COLOUR GRAPHICS

Nick Hampshire shows how you can exploit the Vic's graphics-character generator to plot high-resolution graphics.

HIGH-RESOLUTION point plotting uses exactly the same principles as the generation of user-definable characters. It entails filling the video RAM with each of the 255 character codes — only half the screen can be used with eight-by-eight characters. The RAM character generator can then be used as a high-resolution memory-mapped display.

If all bytes in the RAM character generator are set to zero, then the screen is blank. If you then set one bit in one of the characters, a single high-resolution dot will appear on the screen. The relationship between a single dot on the screen, the locations in the RAM character generator, and the code value in each of the video memory locations is shown in figure 1.

It shows that the basis of high-resolution plotting is simply filling the video RAM corresponding to the screen area of the high-resolution display with successive and incremented code values. The rest is a matter of calculation to ensure that the correct bits are

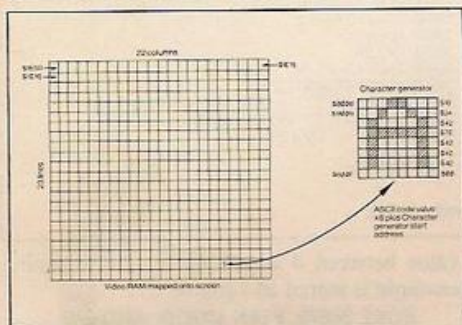


Figure 1. Relationship between character-generator locations and video memory code.

set in each of the eight bytes corresponding to each of the character codes used in the video RAM.

A high-resolution plotting program consists of two parts; the initialisation and the point-plot subroutine. Initialisation sets the registers of the 6561 for a user-definable character generator, lowers the top of memory to protect that character generator, enters the correct data into the video and colour RAMs and clears the contents of the RAM character generator.

The point-plot subroutine is called whenever a point is to be plotted or erased. It consists of a routine to calculate, from given X and Y co-ordinates, which bit in which byte of the RAM character generator is to be set or erased.

It should be noted that the area of the screen devoted to high-resolution plotting can vary from just a few adjacent character spaces to the whole screen. To do this, the 6561 is initialised to display eight-by-16 characters rather than the normal eight-by-eight. That requires the RAM character generator to be enlarged to 4K.

```
6 REM * INITIALISE 6561 REGISTERS
7 PRINT " "
8 POKE36867,128
9 POKE36865,60
10 F(8)=0:F(0)=128:F(1)=64:F(2)=32:F(3)=16
20 F(4)=8:F(5)=4:F(6)=2:F(7)=1
30 FORQ=0TO255
32 POKE7680+Q,Q
34 POKE38400+Q,Q
36 NEXT Q
40 FOR Q=5120TO5120+255*8
42 POKEQ,Q
44 NEXT Q
45 POKE36869,253
46 POKE36866,PEEK(36866)OR128
47 POKE36867,150
60 REM
61 REM *PLOT GRAPH OF FUNCTION IN LINE 90
62 REM
80 FOR C=0TO175
90 L=45+40*SIN(C/10)
91 REM
92 REM *HIGH RESOLUTION POINT PLOT ROUTINE
```

```
93 REM
100 A=5120
110 LR=L/8
120 LA=INT(LR)
130 A=A+(LA*176)
140 LR=(LR-LA)*8
300 CR=C/8
310 CA=INT(CR)
320 A=A+(CA*8)
325 A=A+LR
330 CR=INT((CR-CA)*8)
400 POKEA,PEEK(A)ORF(CR)
500 NEXTC
550 REM
551 REM *WAIT FOR KEY PRESS THEN RETURN
552 REM *SCREEN TO NORMAL
553 REM
600 GETA:IF A$=""THEN600
1000 POKE36869,240
1010 POKE36866,150
1020 POKE36867,174
1030 POKE36865,38
```

Program 1. High-resolution plot of a function.

An example of a set of Basic routines to plot points in high resolution, plus lines and circles, is contained in program 1. These routines use a 2K character generator and eight-by-eight characters so the display occupies only half the screen. The 6561 registers have been used to centre the display.

The Vic has two modes of colour operation: high-resolution mode and multicolour mode. The operating mode and the colours used are determined by the contents of control registers 15 and 16 of the colour video RAM. The colour video RAM is located in a 506-byte block of memory starting at location \$9600 — 38400 decimal.

If there is more than 8K of user memory, the starting location of colour RAM moves down to \$9400 — 37888 decimal. The colour video RAM is only four bits wide, bits 0 to 2 are used to select the character colour, and bit 3 is used to determine whether that character is in high-resolution or multicolour mode.

The high-resolution mode is selected by having bit 3 of the video colour RAM set to zero. This is the normal mode of operation and in it there is one-to-one correspondence between character generator bits and the dots displayed on the screen. This means that all 1 bits will be displayed as dots of one colour and all 0 bits as dots of another colour.

Each character has two colours, a foreground — all the 1 bits — and a background colour — all the 0 bits. One of these colours is determined by the first three bits of the video colour RAM and the other by bits 4 to 7 of control register 16. In normal operation, the foreground colour is stored in the video colour RAM and the background colour, which is common to all characters displayed on the screen, is stored in register 16.

This can be reversed so that all characters have the same foreground colour which is also determined by register 16 and different background colours set by the contents of the colour video RAM. Whether a common foreground or a common background is selected depends on the contents of bit 3 of control register 16.

If bit 3 is set to 1, the display will have differently-coloured characters on a common background colour; if bit 3 equals 0, all characters will have the same colour against a different colour background. In addition to the

foreground and background colours, the 6561 allows the colour of the border around the display area to be changed. This is selected by bits 0 to 2 of control register 16.

The colours which can be displayed on the Vic are divided into two groups. The first group has eight colours. These colours can be used for the foreground or video colour RAM stored colour, and the border. The second group has 16 colours which can be used for the background colour — also stored in control register 16 — and for the auxiliary colour. This is used only in the multicolour mode. The colours available in each of the groups are shown in table 1. To test the capabilities of high-resolution mode, carry out the following operations. Set bit 3 of register 16 for common

| Auxiliary/background colours | Border/Character colours |
|------------------------------|--------------------------|
| 0 Black | Black |
| 1 White | White |
| 2 Red | Red |
| 3 Cyan | Cyan |
| 4 Magenta | Magenta |
| 5 Green | Green |
| 6 Blue | Blue |
| 7 Yellow | Yellow |
| 8 Orange | |
| 9 Light-orange | |
| 10 Pink | |
| 11 Light-cyan | |
| 12 Light-magenta | |
| 13 Light-green | |
| 14 Light-blue | |
| 15 Light-yellow | |

Table 1. Background and character colour codes.

background or common foreground. For common foreground:

POKE 36879, PEEK (36879) AND 247

For common background:

POKE 36879, PEEK (36879) OR 8

Set the common background/foreground colour in bits 4 to 7 of control register 16. There are 16 colours possible. It is the colour number as shown in the table which is stored in the register, as in the following example where variable C is the colour and is set to a value between 0 and 15:

POKE 36879, PEEK (36879) AND 15
POKE 36879, PEEK (36879) OR (C*16)

(continued on next page)

(continued from previous page)

return to normal with

POKE 36879,27

Set the border colour in bits 0 to 2 of control register 16. There are eight possible border colours and it is the colour number shown in table 1 which is stored in the register, as in the following example were variable C is the colour set to a value between 0 and 7:

POKE 36879, PEEK (36879) AND 248
POKE 36879, PEEK (36879) OR 0

Put the colour code for each character to be displayed into the corresponding location in the colour video RAM. There are eight possible character colours — see table 1 — they are stored in bits 0 to 2 of the 506 locations in the colour video RAM.

This is done automatically in a Print statement where the character colours can be embedded in the string as colour commands. If Poke commands are used to put characters into the video RAM then the colour code must also be Poked into the corresponding location in the colour RAM.

Given the column number, Col, and the line number, Lin, of the display plus the ASCII code of the character, A, and the colour code for that character, C, the following routine will put the character and its colour into the correct locations in the two video RAMs:

```
100 Q = LIN*22 + COL
110 POKE 38400 + Q, C
120 POKE 7680 + Q, A
```

The multicolour mode is selected by having bit 3 of the video colour RAM set to 1. In this mode there is a two-to-one correspondence between character generator bits and the dots displayed on the screen. This means that two bits of the character-generator matrix for that character code correspond to one dot on the screen, and the colour of that dot is determined by the two-bit code in the character generator.

The multicolour mode is not suitable for use with the ROM-based character generators but can be very effective when used with a user-definable RAM character generator. This is because the ROM character generators are designed for high-resolution mode displays, where each bit in the character matrix represents a dot position on the screen.

In multicolour mode, the character generator contains the colour of each dot by using two bits to represent each display dot. With a ROM character generator, most characters will thus appear as an array of differently coloured points rather than a character.

The two bits of the character-generator character matrix, which represents each screen dot, select one of four colours for that dot in multicolour mode. The four codes created by these two bits tell the 6561 where to find the colour information for the dot. The two-bit code is not itself a colour code; it is simply a pointer to four different colour codes, giving greater flexibility, as each code pointed to has either three- or four-bit resolution.

The use of a simple two-bit pointer, combined with bit 3 of the colour video RAM being used to determine the colour-display mode means that it is possible to mix high-resolution and multicolour characters in a display.

```
6 REM *INITIALISE 6561 AND CHAR GEN
7 REM
8 POKE36867,128
9 POKE36865,60
10 F(8)=0:F(9)=128:F(1)=64:F(2)=32
20 F(3)=16:F(4)=8:F(5)=4:F(6)=2:F(7)=1
35 FOR Q=0TO255
37 POKE7680+Q,0
38 POKE38400+Q,2
39 NEXTQ
40 FORQ=5120TO5120+255*8
41 POKEQ,0
42 NEXTQ
45 POKE36869,253
46 POKE36866,PEEK(36866)OR128
47 POKE36867,150
90 REM
91 REM *DATA FOR LINE DRAWING
92 REM *START AT COORDINATES X1,Y1
93 REM *END AT COORDINATES X2,Y2
94 REM
100 READX1,Y1,X2,Y2
105 IFX1=255THEN200
110 GOSUB1000
120 GOTO100
150 DATA 80,10,100,40
151 DATA 80,10,60,40
152 DATA 95,38,95,80
153 DATA 65,38,65,80
154 DATA 65,80,95,80
155 DATA 85,80,85,60
156 DATA 90,80,90,60
157 DATA 85,60,90,60
158 DATA 70,75,70,60
159 DATA 75,75,75,60
160 DATA 70,75,75,75
161 DATA 70,60,75,60
162 DATA 70,50,70,35
163 DATA 75,50,75,35
164 DATA 70,50,75,50
165 DATA 70,35,75,35
166 DATA 85,50,85,35
167 DATA 90,50,90,35
168 DATA 85,50,90,50
169 DATA 85,35,90,35
170 DATA 20,80,20,50
171 DATA 22,80,22,50
172 DATA 120,80,120,50
173 DATA 122,80,122,50
188 REM *END OF LINE DATA
189 DATA 255,255,255,255
190 REM
191 REM *DATA FOR DRAWING CIRCLES
192 REM *CENTRE AT COORDINATES CX,CY
193 REM *RADIUS R
194 REM
195 DATA 255,255,255,255
200 CX=21:CY=40:R=10
210 GOSUB3000
220 CX=121:CY=35:R=15
230 GOSUB3000
240 GETA$:IFA$=""THEN240
1000 REM
1010 REM *LINE DRAWING ROUTINE
1020 REM *USES DATA FROM LINE DATA TABLE
1030 REM
1040 XD=X2-X1
1050 YD=Y2-Y1
1060 A0=1:A1=1
1070 IFVD<0THENA0=-1
1080 IFXD<0THENA1=-1
1090 XE=ABS(XD):YE=ABS(YD):D1=XE-YE
1100 IFD1=0THEN1320
1110 S0=-1:S1=0:LG=XE:SH=XE
1120 IFVD=0THEN1300
1130 GOTD1340
1140 S0=0:S1=-1:LG=XE:SH=XE
1150 IFXD=0THEN1310
1160 REM
1170 TT=LG:TS=SH:UD=LG-SH:OR=LG-SH/2
1180 D=0
1190 REM
1200 C=X1:L=Y1:GOSUB2100
1210 IFCT=0THEN1420
1220 CT=CT+TS:X1=X1+S1:Y1=Y1+S0
1230 GOTD1460
1240 CT=CT-UD:X1=X1+A1:Y1=Y1+A0
1250 TT=TT-1
1260 IFTT<0THENRETURN
1270 GOTD1370
2000 REM
2010 REM *POINT PLOT ROUTINE
2020 REM *USED BY LINE AND CIRCLE DRAW
2030 REM *ROUTINES
2040 REM *C=X COORDINATE
2050 REM *L=Y COORDINATE
2060 REM
2100 A=5120
2110 LR=L/8
2120 LA=INT(LR)
2130 A=A+(LA*176)
2140 LR=(LR-LA)*8
2150 CR=C/8
2160 CA=INT(CR)
2170 A=A+(CA*8)
2180 A=A+LR
2190 CR=INT((CR-CA)*8)
2200 POKEA,PEEK(A)ORF(CR)
2210 RETURN
2600 GETA$:IFA$=""THEN2600
3000 REM
3001 REM *CIRCLE DRAWING ROUTINE
3002 REM *OX AND OY ARE OFFSET VARIABLES
3003 REM *WHICH DETERMINE WHETHER A CIRCLE
3004 REM *OR ELLIPSE IS DRAWN
3005 REM
3010 OX=1:OY=1.2
3020 A=2*
3030 N=100
3040 INC=(A-0)/N
3050 FORI=0TOASTEPINC
3060 X=R*SIN(I):X=INT(X*OX+CX+.499)
3070 Y=R*COS(I):Y=INT(Y*OY+CY+.499)
3080 LY=CX-X:GOSUB2100
3090 NEXTI
3100 RETURN
```

Program 2. High-resolution plot of points, lines and circles.

The colour of the dot can be either the background colour, the foreground colour, the exterior border colour or a special auxiliary colour, information on which is stored in bits 4 to 7 of control register 15. The multicolour mode select codes are:

- 0 0 — Background colour
- 0 1 — Exterior border colour
- 1 0 — Foreground colour
- 1 1 — Auxiliary colour

The use of the multicolour mode can be summarised using the following example: Set the background colour to one of the 16 colours. This colour code is stored in the following example in variable C which will have a value between 0 and 15:

POKE 36879, PEEK (36879) AND 15
POKE 36879, PEEK (36879) OR (C*16)

Set the exterior border colour to one of the eight colours. This colour code will have a

Figure 2. Character-matrix settings.

| byte | 76 54 32 10 | Hex | Location |
|------|-------------|-----|----------|
| 0 | 00 01 10 11 | 1B | 5120 |
| 1 | 00 01 10 11 | 1B | 5121 |
| 2 | 00 01 10 11 | 1B | 5122 |
| 3 | 00 01 10 11 | 1B | 5123 |
| 4 | 00 00 00 00 | 00 | 5124 |
| 5 | 01 01 01 01 | 55 | 5125 |
| 6 | 10 10 10 10 | AA | 5126 |
| 7 | 11 11 11 11 | FF | 5127 |

value between 0 and 7 and in the following example is stored in variable C:

POKE 36879, PEEK (36879) AND 248
POKE 36879, PEEK (36879) OR C

Next, set the foreground colour to one of the eight colours by Poking the colour code into the colour video RAM location, corresponding to the location of the displayed multicolour character.

Since it is bit 3 of the colour video RAM which determines whether a character is displayed in high-resolution or multicolour mode, then 8 should be added to the colour-code values for all characters to be displayed in multicolour mode.

Now set the auxiliary colour code to one of the 16 colours. This colour code will have a value between 0 and 15 and in the following example is stored in variable C:

POKE 36878, PEEK (36878) AND 15
POKE 36878, PEEK (36878) OR (C*16)

Bit 3 of control register 16 has no function in multicolour mode but should be set to the normal value of 1, unless otherwise required when mixing both colour display modes.

Finally, set the character matrix for each character to be displayed as in figure 2. This example is for a character in a user-definable character generator starting at location 5120. The character had a code value of 0 and will show each of the four colours available in multicolour mode characters.



WE ARE LOOKING FOR NEW SOFTWARE AND WILL PAY TOP MONEY FOR "UNUSUAL", "FUN" AND "EDUCATIONAL" PROGRAMS AND GAMES



COMPUTERS



COMPUTERS

All submissions will give the programmers 5% discount on all future software.
All software must be on tape and accompanied by instructions.

PHONE WALSALL 641772

or write to

No. 4 CANUTE CLOSE, HIGHGATE ROAD
WALSALL, WEST MIDLANDS

SPECIAL OFFERS

TI 99/ 4A

Plus 20 Programs

ONLY £259

(£297.85 inc. VAT)

ONLY £279

(£320.85 with VAT)

Suitable recorder, cassette cable and library of mixed programs. (Value £50 +)
10% discount on command modules and peripherals.

DAI-PCI

(48K RAM, 24K ROM)

Plus Free

Suitable recorder and library of mixed programs including: Machine Diagnostic and Machine and Basic Language Tutor

ONLY £595

(£684 with VAT)

CP/M Operating System P.O.A.

DAI Super Fast Graphics Utility £15

SOFTWARE Assembler/Disassembler £30

Word Processor £15 Basic Chess £5

DAI Twin floppy disk drives £595 (£684 with VAT)

VIC 20

Plus CC(S) Recorder + Program Library

ONLY £189

(£217.35 inc. VAT)

VIC Recorder £39 — £44.85 inc. VAT.

CC(S) Recorder plus VIC Cable £25 — £28.75 inc. VAT.

Sony 16" Colour TV with 16 channel.

Full remote control

ONLY £285 inc. VAT

Stereo Amplifiers. Five w/channel, mains powered teak cabinet. Ridiculous price to clear — £12 inc. VAT and postage.

MIMI 801

64K RAM, Z80A, 4 ports, twin DSDD

disk drives (700K), CP/M

for BUSINESS and EDUCATION, etc.

All included at an UNBELIEVABLE £1,350

(£1,552.50 with VAT)

Normal, sales and purchase ledgers, invoicing, stock control, etc.

Special prices for printers, monitors, etc. — any system — PLEASE ASK

Computers: Carriage/Packing £3.50 extra please

Orders to:

COMPUTER CONTACT (SALES)

22 BIRCHALL ROAD, RUSHDEN, NORTHANTS NN10 9RQ

Convenience Phone (09 334) 55673 or 56894

6.00 p.m. to 9.00 p.m. and weekends

Prices may change without notice. Offers are subject to availability

MICHAEL ORWIN'S ZX81 CASSETTES

CASSETTE ONE for 1K ZX81

"I had your Invaders React cassette . . . I was delighted with this first cassette."
P. Rubython,
London NW10


"I have been intending to write to you for some days to say how much I enjoy the games on 'Cassette One' which you supplied me with earlier this month. Please let . . . into the secret of your first time load every time!"
E.H., London SW4

Just two out of over 20 unsolicited testimonials.

INVADERS (1K)



PHANTOM ALIENS



BUG SPLAT



Cassette One 1K machine code programs:

React, Invaders, Phantom Aliens, Maze of Death, Planet Lander, Bouncing Letters, Bug Splat.

1K Basic Programs:

I Ching, Mastermind, Robots, Basic Hangman.


PLUS Large screen versions of Invaders and Maze of Death, ready for when you get 16K.

Cassette One costs £3.80.


CASSETTE TWO

Ten games in Basic for 16K ZX81


AWARI



PONTOON



RECTANGLES



PENNY SHOOT



Cassette Two contains Othello, Awari, Laser Bases, Word Mastermind, Rectangles, Crash, Roulette, Pontoon, Penny Shoot and Gun Command.
Cassette Two costs £5.

Recorded on quality cassettes, sent by first class post, from:

Michael Orwin, 26 Brownlow Road, Willesden, London NW10 9QL. (Mail order only please)

As seen on BBC TV "Computer Programme"

BIG EARS

**SPEECH
INPUT
FOR ANY
COMPUTER**



Hugely successful Speech Recognition System, complete with microphone, software and full instructions.

BUILT TESTED & GUARANTEED **ONLY £49**

PLEASE STATE COMPUTER: UK101, SUPERBOARD, NASCOM2, VIC 20, MICRON ZX80/81, PET, TRS80, MZ80K, APPLE II, BBC MICRO

ZX80 ZX81

**MUSIC SYNTHESISER
+ 16 LINE CONTROL PORT**



Play 3-part music, sound effects, drums etc. Full control of attack, decay and frequency. Input/Output lines provide control and monitor facility for Home Security, Robot Control, Model Railway, etc. etc. Works with or without 16K RAM.

Add keyboard to make a live performance polyphonic synthesiser! Full instructions/software included.

AMAZING VALUE AT ONLY £19.50 (KIT)
Extra 23 way connector at £2.50
The "Composer" music program (16K) £6.00 **£25.50 (BUILT)**

COLOUR MODULATOR **KIT £12**
RGB in, PAL/UHF out (not for ZX) **BUILT £18**

UK101/NASCOM COLOUR GRAPHICS **KIT £45**
Inc. Modulator. Still the best selling system! **BUILT £60**

Please add VAT at 15% to all prices.
Barclay/Access orders accepted by telephone All enquiries S.A.E. please

**WILLIAM
STUART
SYSTEMS Ltd**

Dower House, Billericay Road,
Herongate, Brentwood,
Essex CM13 3SD
Telephone: Brentwood (0277) 810244



OAKLEAF COMPUTERS LTD

Education Hobbyist & Small Business Computers

Dimensions:
H 9 1/2" W 26 1/4" D 12"
Aperture: H 4 1/2" W 17 1/2"

**IT'S NOT
JUST ACORNS THAT
LOOK BETTER ON AN
OAK TREE**



**COMPUTER STAND
IT SUITS
APPLE
PET
ITT 2020
SORD M23
& MANY
OTHERS**

With a built in accessory drawer, this smart unit turns your set up into a professional and business-like system. The drawer holds up to 50 diskettes or your tape collection and leads etc.

£19.95

ALL INCLUSIVE

Order by telephone quoting your card number or write enclosing your remittance to:

121 DUDLEY ROAD, GRANTHAM, Lincs NG31 9AD
Tel: (0476) 76994

ACORN SPECIALISTS

THE ZX81 POCKET BOOK

**A STACK OF GAMES
AT YOUR FINGERTIPS**

BOOKS

136 PAGE BOOK

Programs

*ZX81 ADVENTURE.
City of Alzan
Create your own
BALL AND BUCKET
PAINT-A-PIC
DIGITAL CLOCK

*SKI RUN

Plus 20 more Programs

Articles

Using machine code
Efficient Programming
String Manipulation
Plus more

**ONLY
£5.95
inc p.p**



Also available

**ZX81
*Adventure**

GREEDY GULCH
MAGIC MOUNTAIN
PHARAOHS TOMB

ALL 3 for £5.00 inc vat & p.p

***ZX81 Pocket book
Cassette**

All programs & subroutines
from the book on 1 tape

**£5.00 inc vat
& p.p**



PHIPPS ASSOCIATES

(Mail Order Dept B)
99 East St, Epsom Surrey, Tel 03727 21215
quoting your credit card No, 24hr phone service
Air Mail Europe plus 70 p Elsewhere plus £1.70

*REQUIRE 16K RAM

Computing the remedy for human handicaps

To mark Information Technology Year, *Your Computer* is sponsoring a major competition whose aim is the development of imaginative and useful devices through which disabled people can make use of microcomputers. John Dawson sets the scene and lays out the competition rules.

A COMPUTER EXPERT claimed recently that we are making use of only five percent of the microcomputer's potential. Another expert said that home computers are nothing more than toys — nobody has any applications for the computer that demand the use of automatic data-processing equipment.

For example, you can add up the cheques you have issued in a month and the money that has been credited and debited to and from your account without having access to a home-finance package on a microcomputer. There is no absolute requirement for you to have a microprocessor to gain control of your central heating; Monopoly, snakes and ladders and chess were all successful games before the University of Manchester built the first digital computer.

Bright ideas

The *Your Computer* competition for microelectronics for the disabled means that it does not matter whether you have a computer or whether all you have are bright ideas — you can enter.

First, let us reject the idea that the disabled are freaks of nature who ought to be kept out

of sight in hospitals built when Victoria ruled the Empire. People who are disabled or handicapped are just people who are less able in some area than you or I. We are all disabled in some way — I am overweight and cannot run; others are handicapped mentally because of an accident at birth, still others are physically disabled because of polio, spina bifida or motorcycle accidents.

There is a spectrum of disability with no arbitrary break-points and each of us may become disabled at any time. Growing old imposes handicaps on many people, and as acute health care in the U.K. improves, so more people will have to face the chronic disabilities of old age.

Microelectronics and computers promise enormous gains to people who are less able in one area or another than the "average" person. Many of the most useful aids are extremely simple in design. For example, some are designed for basic tasks such as helping someone into or out of the bath or to use a lavatory.

However, many of the aids examined by the Institute for Consumer Ergonomics at Loughborough University have failed to do

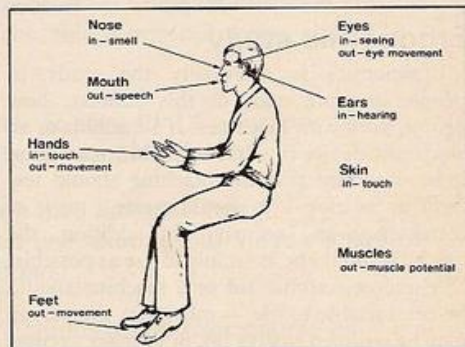


Figure 1. Human "input-output channels".

what a user wants because of bad design — not all aids for disabled people meet the needs of the people who will use them.

From a seat in the bath to the most sophisticated microcomputer program, an aid for the disabled must succeed on two counts — technical engineering and ergonomics.

Microelectronic aids for the disabled need to be:

- Reliable
- Compatible
- Durable, strong and safe

Ideally, a microelectronic aid that is about to fail or is actually failing should notify someone other than the disabled person that it will no longer be able to carry out its designed purpose. If it is made for somebody who is not severely handicapped it should "fail gracefully", and allow the handicapped person to call for technical assistance.

An increasing number of microelectronic aids for the disabled will be marketed in the U.K. Compatibility between different pieces of equipment is important in increasing the size of the market, and reducing production costs.

Joystick control

For example, a joystick control might be used to move chess pieces on an electronic chessboard. The physical layout of the connecting plug and socket between the joystick and the computer as well as the allocation of signals to each pin should be arranged according to a published standard.

Durability, strength and safety are all important in the technical design of microelectronic aids. The person using a piece of microelectronic equipment should be reasonably certain that it will continue to work for the foreseeable future. Similarly, the designers of equipment for the disabled must be aware that handicapped people may be caught off balance more easily than an able person and may lean heavily and suddenly on anything that comes to hand.

A disabled person may fall and pull on
(continued on next page)

Figure 2. Current possibilities for input and output of information.

| Output from the computer | | Recognition | versions exist. Increasing use being made of this technology. |
|--------------------------|--|--------------------------|---|
| Visual display units | Widely used. Several basic types exist with different manufactured versions. | Voice | Research prototypes exist. Some manufactured versions are available. |
| Printers | As for visual display units. | Finger/hand/arm movement | Several basic types exist — light-pens, digitising panels, touch panels, joysticks — with manufactured versions. |
| Voice | Research prototypes available and a few manufactured versions. | Leg movement | Little use made of this channel although the technology exists. |
| Smell | Little work at present. Possible uses in fault detection. | Eye movement | Research — mainly for the military. |
| Touch | Research on aids for the blind. | Muscle potential | Research on direct electrophysiological control of artificial limbs and also on direct brain electric signal control of external units. |
| Input to the computer | | | |
| Keyboards | Widely used. Several basic types exist with different manufactured versions. | | |
| Character | A number of manufactured | | |

(continued from previous page)

connecting wires or may be unable to get up again in order to reach an alarm switch. If a handicapped person is going to use a suck/blow switch for putting information into a computer it is important that the mouthpiece and the switch are electrically isolated to accepted safety standards. A person suffering from epilepsy, unstable diabetes or who has serious heart disease may need to take particular care with any equipment that moves or could trap a hand or an arm.

Ergonomic study

Ergonomics is essentially the study of people at work and, in this context, how people work with machines. If a machine or an electronic device is to be acceptable to a person it is important that the machine should feel right to its user — it should create a sense of consistency and security. In addition, the machine should be as simple to use as possible.

A microelectronic aid or a machine should be comfortable to use — otherwise the person may be tempted to give up, or to make excuses that the machine is not what they want, or to say it is inaccurate, or simply to reject it out of hand.

Anybody using a machine will do it better if the device is satisfying to look at and if it is seen to enhance the appearance of the user's environment.

The *Your Computer* competition is about using your computer to design something that will help other people. I cannot introduce it better than by printing a letter from a speech therapist in Scotland: "We read the article on IT 82 in *Therapy* with much interest. Here at our residential school we find it difficult to equip out very severely physically-handicapped children with suitable input switches

for the electronic aids available. Also, we are trying to learn as much as we can about micro-computers in the hope that eventually they may be available here, too.

"Any information we can get on literature on the subject would be most welcome. We ran a day course in November and we were overwhelmed by the response — so the need and interest is there. One of our biggest problems is adapting switches for certain children as we have no technician — also these switches are so expensive. If they were on the mass market it would be marvellous".

The prizes and rules of the competition are described at the end of the article and you should note that there are two groups in the competition — one for people under 18 years old on 31 August 1982, and the second for individuals or clubs and organisations with access to hardware and software.

You need to write not more than 2,000 words describing a special-purpose device to accept information into a microcomputer from someone who is disabled, using that input to control programs that will carry out a useful function for that person.

Practical needs

In group 1 the judges are looking for original and stimulating ideas, organised around the practical needs of someone handicapped in a particular way. In group 2, the judges hope to see a working, prototype device with a small computer program that can be used to control ordinary, commercially-available software.

Figure 2, taken from a National Computing Centre publication, *Designing Systems for People*, may stimulate your imagination. It sets out the state of the art in 1980 for inputting information for computers.

Competition Rules

- The competition will be divided into two sections: group 1 for people under the age of 18 on August 31, 1982; and group 2 for all other individuals, clubs and organisations.
- All entrants must write up to 2,000 words on building a device to which will provide practical help for disabled people. This must take the form of a device which will help disabled people to use a microcomputer keyboard, or a device which works in conjunction with a microcomputer to allow a disabled person to perform an activity which their disability normally prevents them from performing or enjoying.
- Entrants for group 2 should also build a prototype device.
- The winners of the competition will be the individual, groups or clubs who, in the opinion of the judges, invent the most original and useful device for disabled people to use with a microcomputer. Preference will be given to entries which make the widest possible use of commercially-available equipment and commercial or published software.

- The names of the winners will be printed in the January 1983 issue of *Your Computer*.
- It is hoped to announce the winning entries at the Information Technology Year 1982 conference to be held at the Barbican Centre, London, in December.
- Entries to the competition cannot be acknowledged.
- No employees of IPC Business Press or their relatives may enter the competition.
- The decision of the judges is final.
- No correspondence on the result of the competition will be entered into.
- IPC Business Press assumes no responsibility or liability for any complaints arising from this competition.

Prizes

- The winner of group 1 of the competition will be awarded a BBC Microcomputer.
- The winner of group 2 of the competition will be awarded an Epson MX-80FT printer.
- The top 10 runners up will receive copies of *Asimov*, a word-processing package for the Microtan.

Traditionally, mass-producing and marketing the product are neglected areas. The cost of the product is important set against the cost of existing products and the value of the device to a person who is elderly or disabled. The compatibility of the device with other microelectronic equipment may be a crucial factor in a company's decision to market an aid.

Distribution question

How is the device to be distributed? Would it be sold directly to people who are handicapped through High Street retail shops or will it have a limited distribution through charitable organisations specialising in helping the disabled? What is the market for the product?

Is the aid something that will extend the performance of all the 960,000 handicapped people in the U.K. or is it intended for a more specialised market, helping those who are severely disabled or, conversely, those whose disability while not severe is comparatively specialised? Is the product easy to service after it has been sold? How long will it take a service engineer to find and what spares and equipment will he have to carry to put the device back into working order?

The use of microelectronic aids for disabled people presents the technical design, ergonomics and marketing factors in sharp, black-and-white relief. However, all these questions are important to the development of micro-electronic equipment in general.

Thinking about design for the disabled has valuable spin-offs for people who are not handicapped. Good design is universal and if you succeed in making something that is attractive and can be used easily by an elderly or handicapped person, the chances are that it will also be successful for a large number of able people looking for a tool to carry out a particular job.

Piecemeal research

Do not be discouraged from entering the competition by the work already being done in this area. So far, research into the needs of the disabled has tended to be piecemeal and uncoordinated. While the Department of Industry is discussing a plan, costing perhaps £2 million, to take computerised aids available to disabled people during Information Technology Year, the Department of Health and Social Security — formally responsible for providing technical aids for the disabled — is not enthusiastic about new schemes because of the novel technology that is involved.

The Health Section of Information Technology Year 1982 will encourage the marketing of the winning designs in the competition and will ensure that the investors of a successful design receive an adequate royalty for equipment that is sold. CAP Scientific Ltd is an offshoot of Computer Analysts and Programmers Ltd and the company has agreed to assess the entries to the competition with a view to production and subsequent marketing.

Entries for the competition must be sent to John Dawson, IT 82 Health Section, *Your Computer*, IPC Electronic Press, Quadrant House, The Quadrant, Sutton, Surrey, SM2 5AS, and must arrive not later than 31 August 1982.

VIC 20 DOMESTIC CASSETTE INTERFACE

Why purchase a special cassette deck at twice the price when you may use our interface on your existing home cassette player? £19.55 inclusive of VAT plus £1.50 P & P.

VIC 20 3K, 8K and 16K RAM expansion packs at £24.50, £40.25 and £63.25 respectively, including VAT plus £1.50 P & P each.

The 3K attaches to the enhanced 16K RAM pack costing £74.75 to give 19K RAM.

The 8K RAM pack may easily be expanded to the 16K by the simple insertion of additional I.C.'s, as the sockets are provided on board in the price. £5.75 for each 2K.

Battery RAM backup is available.

All contained in neat specially designed cases.

ZX81 16K RAM EXPANSION PACK

Quite simply good value for money at £34.50 including VAT plus £1.50 P & P. Contained in a neat specially designed case.

Junior Maths Pack One to run on 1K RAM ZX81 — five helpful programmes on cassette for £5.75 inclusive. Logic, Sums, Nimb, Division & Money.

CEL Customised Electronics Limited


Winkler Green Mills, Stanningley Road, Armley, Leeds LS12 3BB. Telephone 0532 792332.
155 Marton Road, Middlesbrough, Cleveland TS4 2EN.
Telephone 0642 247727.

MAILING LIST PROGRAM ZX81-16K

- Entry and retrieval of 30 business names/addresses/telephone numbers, sorted alphabetically;
- Selective display or print (if ZX printer available) on up to four selection parameters;
- Modified version also included for family/domestic use, storing birthdays instead of telephone numbers;
- C-60 cassette includes audio user course as supplement for documentation supplied.

Please send cheque/PO for £5.75 to:

Dept. C
Norfolk Computer Agency
5 Conway Road, Sheringham
Norfolk NR26 8DD

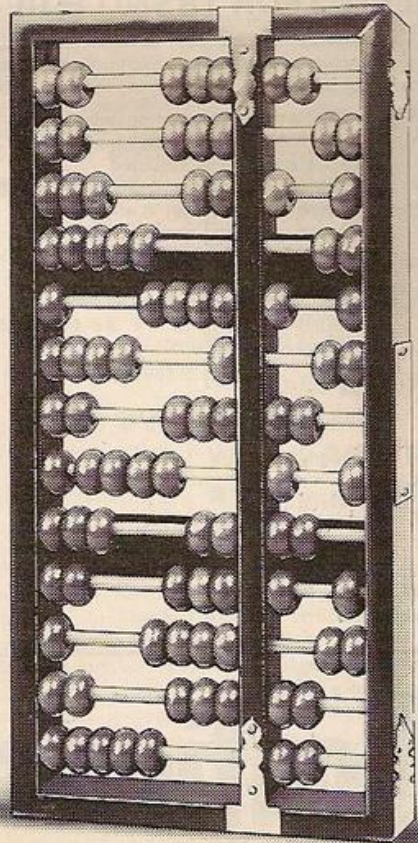

low cost START COMPUTING IN CAMBRIDGE

For less than £100 you can launch yourself into the world of computing with your own system. At Cambridge Computer Store our "Budget Micro" department offers an exceptionally wide range of inexpensive machines, all generally on demonstration, available from stock and fully supported by our enthusiastic staff.

- Sinclair ZX81
- Acorn Atom
- Commodore VIC20
- Tandy Colour Computer
- TRS-80 Model I
- Sharp Pocket Computer
- Low-cost peripherals

Make the right start! Visit us at:



Cambridge Computer Store

1 Emmanuel Street, Cambridge CB1 1NE
Telephone (0223) 65334/5

MAIN GENIE DEALER

Premier Publications now offer the FULL range of Genie equipment, including expander boxes, disk drives and video monitors for the Genie and TRS80 I/III range. Samples prices . . .

| | |
|------------------------------|-------------|
| GENIE I with cassette deck | £319.95 inc |
| GENIE II with numeric pad | £334.95 inc |
| 40 track disk drive (EG400) | £219.95 inc |
| 32K Expander Box (EG3014) | £214.99 inc |
| 12inch black & white monitor | £69.95 inc |
| 9inch high quality monitor | £92.00 inc |
| Parallel Printer Interface | £37.95 inc |

**See us at
Stand 536
Computer Fair**

PREMIER WORD PROCESSOR PACKAGES

Premier offer a wide range of WP packages for the hobbyist and small businessman, starting from as little as £370. All use our phenomenally successful WORD4WORD word processor which was our top-selling business program in 1981. Most of the packages use the CENTRONICS 737, a superb printer which is capable of correspondence quality output with three type faces, true descenders, sub/superscripts, underlining AND proportional spacing. The WORD4WORD supplied makes full use of the above features, and gives true right justification in proportional mode, whether the text is a letter or a series of columns. All disk-based packages are supplied with DOSPLUS.

| | |
|---|----------|
| WP1 W4W + GENIE II | £369.95 |
| WP2 W4W + GENIE II + CENTRONICS 737 PRINTER + all cables | £759.95 |
| WP3 W4W + 48K GENIE + 40 track disk drive + DOSPLUS + 737 Printer | £1245.00 |
| WP4 as WP3, but twin drives | £1449 |
| WP5 as WP4, but with twin double density disk system | EPOA |
| WP6 W4W, GENIE II, disks and a daisywheel printer. Available MAY | ETBA |

WORD4WORD

STUNNING NEW TRS80/VG WORD PROCESSOR

Why pay £75 to £150+ for a W.P.? W4W gives you all the facilities you could wish for in WP for a sensible price. Amongst the features included are:

FULL SCREEN EDITING & TWO WAY SCROLLING
FULL TEXT INSERT/DELETE ON SCREEN
GLOBAL SEARCH & AMEND
TEXT SEARCH — TOTAL TEXT MOBILITY
TEXT FORMATTING TO SCREEN OR PRINTER
CASSETTE/DISK STORAGE OF TEXT
VISION LOAD OF STORED TEXT
STANDARD LETTER ROUTINES
OVERTYPE CORRECTION
SINGLE KEY WORD DELETION
PAGE LAYOUT & NUMBERING
TOTAL PRINTER CONTROL
TEXT HIGHLIGHTING FOR U/L RECOGNITION
TEXT BLOCK MANIPULATION
COMPREHENSIVE TAB & TABLE GENERATION

Many other features are included in W4W. We would need several pages to do justice to this superb product. W4W is comparable to most purpose-built systems. COMMISSIONED AND DEVELOPED BY PREMIER WITH THE HOBBYIST AND SMALL BUSINESSMAN IN MIND. Please state machine type and printer when ordering. W4W can cope with the Centronics 737/9 and Tandy proportional spacing modes. Price CASSETTE £33.95, DISK/FLOPPY TAPE £37.95.

SCREDIT

This fabulous screen editor has the following features:

- twin cursors for easy editing
- two speed copying from second to main cursor
- complete mobility of new cursor
- user-definable cursor locations
- auto-repeat cursor movement keys
- 27 new functions
- useable with most assemblers

SCREDIT also allows the user to save a segment of screen information to memory for later retrieval/editing. SCREDIT is a machine code program needing less than 3K of user RAM. It is compatible with Premier's TOOLKIT II, and locates at the top of memory.

Specify Model I, II GENIE I, II and memory size when ordering. Cassette £14.95. DISK (specify DOS) £16.95. Floppy Tape £17.95.

MICROTRAIN FOR TRS80/VG

At last you can combine two of the most popular hobbies in the country — railways and computing. MICROTRAIN, a brand-new quality simulation from Premier, allows you to set up a network of tracks, points, stations, tunnels, bridges etc and then run trains to your own timetable! Signalling is provided either automatically or to your design.

MICROTRAIN is a screen-based simulation. With one keystroke you can draw and signal lines many scale-miles long. Trains can be run simultaneously and the speed and length of each train is user-selectable. A cursor is used to move the whole screen display left or right for visual inspection of any part of the network. You can use any of the machine's graphics on-screen to build up scenery. Designs can be stored onto tape/disk for future retrieval.

MICROTRAIN is a machine code program and will run on any Genie or TRS80. State machine when ordering. CASSETTE £14.95 inc. DISK (specify DOS) £16.95 inc.

TOOLKIT 2 FOR TRS80 I & III/VG

TOOLKIT 2 features 17 new easy-to-remember command words and a machine code monitor which greatly enhance an already powerful BASIC

| | |
|----------|--|
| REPLACE | replace any string, word or variable |
| VARS | gives a list of variables on screen |
| TRACE | see line contents as executed |
| ABBREV | 26 BASIC words become single-key entries |
| RENUMBER | operates from any start in any increment |
| BLANK | removes unwanted spaces and LET statements |
| VTAPE | true Vision load plus APPENDING |
| MC | a full machine code monitor |
| VARTRACE | lists lines as executed plus variables |
| PAGE | controlled list scrolling |
| OLD | retrieves lost programs! |
| FIND | anything in a BASIC listing |
| REMKIL | kills REMS! |
| DUPL | copy existing line to new line |
| LFIND | } all work to printer |
| LVAR | |
| LREPLACE | |
| PRICES | Cassette £29.95 Disk (Specify DOS) £32.95 |

POSTAGE & PACKING: Software 75p per order. Eproms/Discs 95p per order
GENIE HARDWARE POA
ALL PRICES INCLUDE VAT



Premier Publications



208 Croydon Road, Anerley, London SE20 7YX. Tel: 01-659 7131

RESPONSE FRAME

Do you have a problem? Your manual is incomprehensible or you just cannot get the hang of that programming trick you tried — whatever it is, Tim Hartnell will do his best to answer your queries. Please include only one question per letter and mark them "Response Frame".

MICRO ROBOTS

■ I have been an avid reader of *Your Computer* since its inception and can assure you that I look forward to each issue. I use a ZX-81 for general office use although the moment has now arrived where I shall have to look to a larger micro. I have a small hand-operated box-making machine which has three movements, one of which includes measurement. I can see how to operate the machine in all but the measurement side if I were to semi-automate it. Can you give me the name of any product or company that specialises in line measurement to an accuracy of 1mm. and, of course, using the ZX-81 program for this purpose?

J C R Wood,
Wincolmlee,
Hull.

THANK YOU for your comments on the magazine. The short answer to your question is, no. We suggest you contact the firms mentioned elsewhere on this page, and in the advertisements in this issue, which deal in hardware for the ZX-81, but doubt they could help you. Next time you are in London you might like to visit the Science Museum where — in the Challenge Of The Chip exhibition — there is an Acorn Atom controlling a robot arm painting a model car. The robot's movements are all under software control. This may well be a suitable unit for you. Although we have heard that a ZX-81 robot arm is possible, we have not seen one in action.

PET BOOKS

■ I would like to buy a book on Basic on an old-ROM 8K Pet, covering all the commands available in this version of Basic.

J Smith,
Lancing,
West Sussex.

THE BOOK we would recommend is called *Pet Basic, Training Your Pet Computer*, by Ramon Zamora, Robert Albrecht and William Scarvie. Published by the Reston Publishing Company, this book takes you through Pet Basic from very first principles. It is suitable for any ROM Pet as a first guide. Unfortunately, at £11 it is very expensive in the U.K. Chapters include "Getting to know your Pet", "Training your Pet to speak Basic" and "The world of Pet variables". The text is easy to understand, and there are some demonstration

programs. Once you've got that under your belt, you might like to try a follow-up volume *32 Basic Programs for the Pet Computer* by Tom Rugg and Phil Feldman. Published by the Dilithium Press, this book retails for around £7. Programs include Flashcard, Stopwatch, Roadrace, Groan and Wari.

ZX KEYBOARD

■ I am the owner of a ZX-81 and would like some advice on which add-on keyboard I should buy for it, as the existing one is very slow to work with.

Martin Smith,
Cardiff.

THERE ARE a large number of keyboards on the market for the ZX-81. It may reassure you to know that we have never had a single complaint from anyone regarding the extension keyboards they have bought for the ZX-81. The best thing to do is to write to three firms which make a keyboard in the price range you can afford — most seem to cluster around the £20 and £30 mark — and select one of those. Redditch Electronics has been in the business of making ZX keyboards for at least as long as any other firm in the field so it may be worth approaching. Protos Computer Systems has produced a heavy-duty keyboard — see *Your Computer*, February — but this is very expensive at £64.95. The dK computer keyboard at £28.95 is supplied as a kit which is particularly easy to connect up to the ZX-81. Details on 03447-4731. dK 'tronics, on 0493-602453, produces a number of ZX add-ons, including a keyboard for £27.95. Fuller Micro Systems produces a keyboard unit which completely swallows the ZX-81 to produce a very neat enclosed unit. The keyboard kit is £18.95 or £24.95 built, plus £11.75 for the case. Details on 051-236 6109.

WORK AND PLAY

■ I am managing director of a small company which at present has an information shortage. This is due to the complexity of handling the details of a relatively modest volume of paperwork relating to purchase/sales ledger, stock control, cash flow, etc. We have consequently decided to investigate the advantages of using a computer system. We would require in the first instance the most economic system suitable for our needs to allow us to evaluate the full potential advantage with a view

to expanding or renewing the entire system, if advisable, at a later date. Our preliminary investigations show we require at minimum a 16K or 32K unit, with disc storage, cassette, printer and either a built-in VDU or separate monitor. In addition, however, the equipment will be kept at home and so it would be suitable for personal use. That is, introducing my children to computing, playing games, using the screen for design and drafting purposes using a light-pen facility which in turn would mean high-resolution multicolour graphics. Having read any amount of available literature, I am confused. There is no immediate urgency, so if equipment is shortly to come on to the market which may prove more suitable than current items, I would be prepared to wait.

John E Adams,
Nottingham.

THE SIMPLE answer to all your needs would be an Apple II, but it is far from the cheapest machine. If you subtract the need for high-resolution graphics and the light-pen, there are many machines at the lower end of the domestic market which could provide much of what you require. Of greater importance than, say, the light-pen, though, is the availability of suitable software for your business. It may well be that there is a Pet program which you could use off the shelf. You certainly do not want to go to the lengths of computerising your business once, only to do it again in 18 months' time. Obtain some literature on the Apple II/ITT-2020, the 80-column Pet, and any computer around £300-£400 you find attractive. Make sure you enquire about suitable software before deciding.

U.S. SINCLAIR

■ While living in the U.S. earlier this year, I bought a ZX-80. I returned to the U.K. and contacted Sinclair Research, regarding conversion for U.K. use. I received a reply which stated that it was not possible to convert the unit. After several telephone calls to Sinclair, I was informed by the technical department that a conversion could be possible, but they were unable to help or advise me, and suggested that I wrote to a computer magazine! At present I have the ZX-80 plus connection leads to the TV, and the correct input voltage via a 220-110V transformer to the Sinclair transformer unit.

Colin Grimwood,
Tonbridge, Kent.

SORRY COLIN, but if Sinclair Research cannot help, neither can we. However, it seems that although the work required could be done, it would amount to a considerable degree of rebuilding, possibly more

than the ZX-80 is worth. Why not buy a secondhand ZX-80 for around £35; or try and find an American TV; or the last alternative is to forget it and buy a ZX-81?

SPEAK TO ME

■ Would it be possible to add a voice to my ZX-81, similar to that of the Speak And Spell game available, or are there commercially-produced voice units? What can I buy to help me use the ZX-81 port?

William G Lockitt,
Rhyl,
Clwyd.

COMMERCIAL units, with vocabularies of around 144 words, are available which you may be able to adapt for the ZX-81. The best thing to do is to write to those advertising speech units and find out which of them could be adapted for the ZX-81. Units to produce music from the ZX-81 are available. A full range of hardware add-ons for the ZX-81 is available from the Buffer Micro Shop, Streatham High Road, London SW16. A programmable input/output controller based on the Z-80AP10 is available from Thurnall Electronics Ltd, telephone 061-775 4461. This allows you to use up to 16 programmable input/output lines, all TTL compatible. Control of the port can be carried out from within programs. R D Laboratories — 0920-84380 — provides a number of hardware interfaces for the ZX-81 which could prove useful.


WHICH PRINTER?

■ I own a Vic-20 which I intend to expand to its full potential, and when finances allow. I am interested in purchasing a printer and the ZX Printer, being the cheapest available, appeals most. Could you inform me if it is possible to connect the ZX printer to my Vic-20 and if this is very technical, is there someone who could supply the necessary goods ready assembled? As a hobbyist, I have limited resources, and technical expertise. Could you therefore inform me of the most suitable alternative if my suggestions are not feasible?

K Peat,
Chaddesden,
Derby.

NICK LAMBERT at Quicksilver tells us he has made an interface to connect the ZX printer to the Acorn Atom. There seems to be no reason, if this is true, why the same could not be done for the Vic-20. However, the unit will, of course, cost something, and the ZX printer output — although adequate for most purposes — in no way approaches the splendid quality of the Vic 1515 Printer. You can contact Quicksilver at 95 Upper Brownhill Road, Maybush, Southampton, Hampshire.

HOW TO GET SERIOUS ABOUT ZX GRAPHICS FOR ONLY £3.50

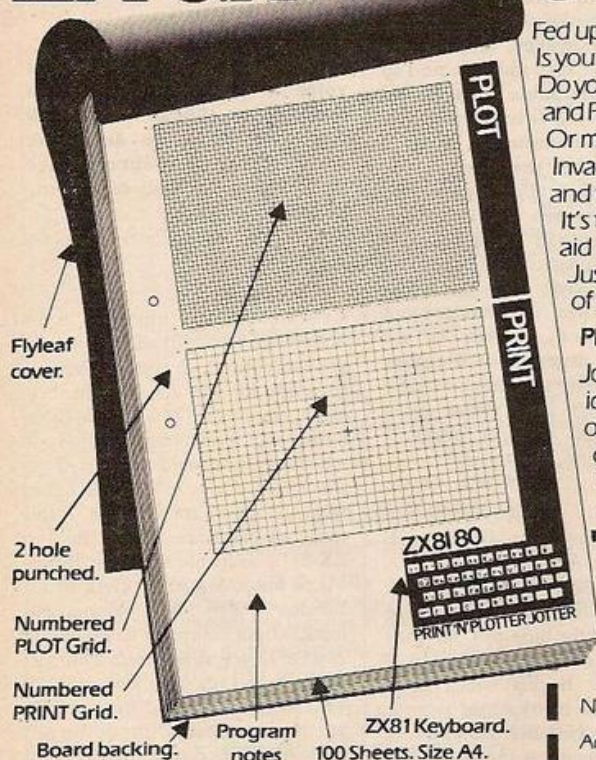

Available at • Buffer Micro Shop 374a Streatham High Rd. London SW16 • Denny's Booksellers 2 Carthusian St. London EC1 • Microware 131 Metton Rd. Leicester.

Fed up with listings that ignore the graphic approach? Is your PRINTING and PLOTTING still guesswork? Do you want to write data programs with graphic PRINT AT and PLOT and professional looking 'windows' and 'scrolls'? Or maybe you're still trying to find the successor to Space Invaders! All you need is ingenuity... and the **PRINT'N'PLOTTER JOTTER**.

It's the professionally-produced ZX Graphics-aid designed by enthusiasts... for enthusiasts. Just take a look at the specification - then think of the possibilities for **real** graphic graphics!

PRINT'N'PLOTTER FILM TOO - FOR ONLY £2.25!

Jotter 'FILM' is a matt Polyester film version of the "JOTTER" Grids identical in size so you can co-ordinate **precisely** PRINT and PLOT or you can copy photographs, drawings, maps, charts! The surface of the film is ideal for drawing (with pencil) and erasure. With both JOTTER and FILM the graphics possibilities are enormous - despite low resolution. Isn't it time you got serious about ZX Graphics?

Post to Butler, Currie & Hook, 19 Borough High Street, London SE1 9SE.

Please send me "Jotters" @ £3.50 (inc VAT, P&P)

Please send me "Films" @ £2.25 (inc VAT, P&P)

Please send me your illustrated leaflet - I enclose a stamp.

Please bill my Access/Barclaycard No: _____

Name _____

Address _____

Post Code _____


All goods are despatched within 48 hours of receipt. If you require 1st Class return post please add 50p to "Jotter" price.



How to turn your ZX 81 into a powerful picture machine.

Y

VIC 20



UK 101

VIC SOFTWARE

- Breakout . . . need we say more? £6.70
 - SeeSaw . . . move SeeSaw to catapult men and burst balloons £4.60
 - Mindmaster . . . guess! £6.50
 - Artillery . . . work out trajectory and blow up your opponent! £5.00
- ALL RUN ON BASIC VIC!

COMPUKIT SOFTWARE

- Duck Shoot . . . get ducks or they'll get you. £5.00
 - Maze . . . escape from maze in fixed time £4.80
 - Maze Chase . . . get out or get eaten £5.80
 - Fortune Teller . . . your past, present and future told by computer fortune teller £7.00
- ALL 8K PROGRAMS

Many products coming soon. Look out for Ads
MAIL ORDER ONLY Please add 25p p&tp

A & P ELECTRONICS
36 Hillsborough Court
Mortimer Cres., London NW6



ZX-81 OWNERS ACCESS TO THE OUTSIDE WORLD!

Using our programmable **INPUT/OUTPUT** controller based on the Z80AP10, you

can use up to 16 programmable input/output lines, all TTL compatible. Control of the port can be carried out from within programs giving a whole new dimension of uses for you ZX-81 computer.

The port can be used **WITH** or **WITHOUT** the **16K RAM PACK & PRINTER**.

Available in kit form or assembled, and comes complete with instructions, a pack of software notes and circuit ideas.

£10.99 IN KIT FORM

£13.99 ASSEMBLED

50p Post +
Packing +
Add 15% VAT

Snap on Analogue card and Relay board available shortly. Send SAE for details.

THURNALL (ELECTRONICS) ENG.
DEPT Y, 95 LIVERPOOL ROAD,
CADISHEAD, MANCHESTER M30 5BG
TEL: 061-775 4461 (24 hour)



Fingertips is our regular calculator column covering calculator news, programming hints and examples of unusual applications. The column is written and compiled by calculator enthusiast David Pringle who is glad to hear of any of your ideas. *Your Computer* pays £6 for each of your contributions published.

WE SEEM to receive a staggering number of letters from people who are 14 years old. A possible explanation for this unlikely phenomenon is that perhaps our correspondents like to pretend that they are child geniuses. For the youthful element in our readership, here is a note on statistical functions by Leon Goodfriend of Cardiff.

Most scientific calculators now have statistical capabilities; suitable programs are available for many micros, he writes. We are all aware of the simplest of all statistical functions — the average, or arithmetic mean to give it its proper name. It is found, of course, by dividing the sum of the available data by the number of data. We say that:

$$\text{Average} = \frac{\text{sum of data}}{\text{number of data}}$$

or

$$\bar{x} = \frac{\sum x}{n}$$

This introduces several pieces of notation:

\bar{x} is the average value of x
 $\sum x$ is the sum of the set of data
 n is the number of data in the set

In general Σ , the Greek capital sigma, represents the sum of a set or series, and a straight line above a letter indicates the average or mean value.


The average is a useful and powerful tool, but it does not always tell us all we need to know. Look at the following sets of data:

x {17, 15, 18, 18} y {3, 11, 21, 33}

\bar{x} is 17, as is \bar{y} , but we can see that there is a much greater variation in the y set than in x . There is a way to measure the variation of a set. It is known as the standard deviation, and has the symbol σn — the letter σ is a lower-case sigma.

To find the standard deviation we need to know $\sum x, n$ and also another

Figure 2. Non-linear curves.

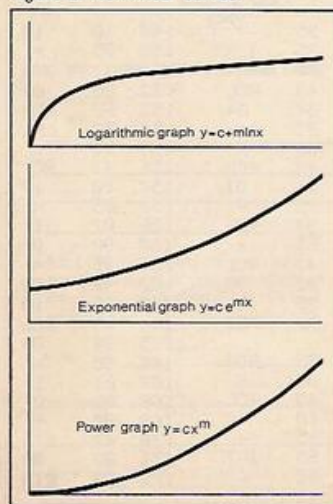

piece of information, $\sum x^2$ — the sum of the squares of the values of x . The formula for standard deviation, like many others in statistics can take several forms and the following is one which is widely used:

$$\sigma n = \frac{\sum x^2 - \frac{(\sum x)^2}{n}}{n}$$

Using this formula we can find that:

$$\begin{aligned} \sigma n (\text{standard deviation of } x) &= 1.2247 \\ \sigma n &= 11.225 \end{aligned}$$

There is another form of standard deviation which is preferable if we need to estimate deviation of a set without using all the data in that set. This second form of standard deviation has the symbol $\sigma n-1$ and is found as follows:

$$\sigma n-1 = \frac{\sum x^2 - \frac{(\sum x)^2}{n}}{n-1}$$

$$\begin{aligned} \sigma n-1 &= 1.4142 \\ \sigma n-1 &= 12.9615 \end{aligned}$$

To distinguish between the two types of standard deviation, we call σn the population standard deviation and $\sigma n-1$ the sample standard deviation. The sample standard deviation is usually used when we are dealing with large sets of data and do not wish to enter them all into a calculator or computer. It allows for the fact that a small section from a set is less prone to variation than the whole set.

Standard deviation and averages can be applied to bar graphs and single sets of data, but we are often concerned with graphs which show how one commodity varies with another.

Look at the graph in figure 1. It shows how the length of a spring varies under different loads. The points corresponding to the results of the experiment are shown, along with the best straight line between them. Any straight-line graph can be expressed in the form

$$y = mx + c$$

Clearly, x and y specify the position of a point on the graph, but m and c require some explanation. The length of the spring with no load is 50cm. This is the point where the

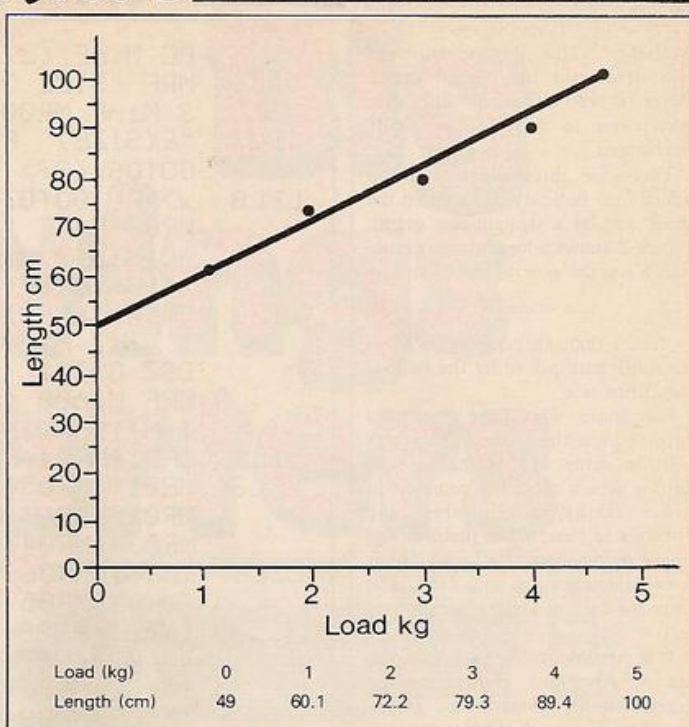


Figure 1. Experimental data plotted as best straight line.

line of the graph crosses the y or vertical axis and is called the intercept. It is given the symbol " c ", so " c " is the value of y when $x=0$.

We can also measure the slope or gradient — shown by the symbol " m " — of the line. This can be done by drawing on the graph, but we will concern ourselves with a numerical method.

To find m and c we need the following information: $\sum x, \sum y, \sum x^2, \sum xy, n$. $\sum xy$ is the sum of the products of each pair of data i.e. for each pair of data, multiply x by y and add the answer to $\sum xy$.

These equations will give us the best straight line through any set of points:

$$\begin{aligned} m &= \frac{n \sum xy - \sum x \sum y}{n \sum x^2 - (\sum x)^2} \\ c &= \frac{\sum y - m \sum x}{n} \end{aligned}$$

For the graph in figure 1, $m=10$ and $c=50$, so we say that the equation of this line is

$$y = 10x + 50$$

Note that if the line slopes downwards from left to right then m will be negative.

Once we know m and c , only one of the values x and y needs to be known for us to calculate an estimate of the other. To indicate the esti-

mated value of a number, we place a circumflex above it and the estimations for a straight line graph are:

$$\hat{y} = mx + c$$

$$\hat{x} = \frac{y-c}{m}$$

In the same way that we use standard deviation to measure variation in a single set, we have a means of measuring the closeness of fit of a set of points to a straight line. This is called the correlation coefficient and has the symbol " r ". The correlation coefficient is given by the equation:

$$r = \frac{n \sum xy - \sum x \sum y}{\sqrt{[n \sum x^2 - (\sum x)^2][n \sum y^2 - (\sum y)^2]}}$$

and for figure 1, $r=0.99809$.

The value of r will always be between -1 and 1 . A negative value simply indicates that the gradient of the line is negative. Values close to 1 and -1 indicate that the points are close to a straight line while values near zero indicate that the data probably do not represent a straight line graph.

If the result is exactly 1 or -1 , then all the data lie precisely on a straight line. There is another test, known as the decision coefficient, which is simply the square of the correlation coefficient and has the

(continued on next page)

Table 1. Characteristics of various modes of regression analysers.

| Type of Regression | Input $x : y$ | For c | To estimate y Input | For output | To estimate x Input | For output |
|--------------------|-----------------|-------------------------|-----------------------|--------------------------|-----------------------|--------------------------|
| Linear | $x : y$ | formula yields c | x | formula yields \hat{y} | y | formula yields \hat{x} |
| Logarithmic | $\ln x : y$ | formula yields c | $\ln x$ | formula yields \hat{y} | y | find exponent of result |
| Exponential | $x : \ln y$ | find exponent of result | x | find exponent of result | $\ln y$ | formula yields \hat{x} |
| Power | $\ln x : \ln y$ | find exponent of result | $\ln x$ | find exponent of result | $\ln y$ | find exponent of result |

(continued from previous page)

symbol r^2 . This always returns a positive answer which tends to be closer to zero although values of r very close to 1 remain virtually unchanged.

There are three types of graph which may be analysed in much the same way as a straight-line graph. Figure 2 shows a logarithmic graph, which has the general equation

$$y = m \ln x + c$$

so rather than multiplying m by x , we must multiply m by the natural logarithm of x .

For those who have not used natural logarithms, they operate in just the same way as the log and antilog which are more common in lower maths, but whereas log operates to base 10, \ln (natural log) operates to base "e", which is approximately equal to 2.7183. The term for natural antilog is exponent (e^x).

It is possible to form a whole new set of equations to analyse the regression of a logarithmic graph, but there is a much simpler method. Rather than performing our calculations using y and x , we can perform them on y and the natural logarithm of x ($\ln x$). Thus we will obtain values of $\sum(\ln x)$, $\sum(\ln x)^2$, and $\sum(\ln x)y$ rather than $\sum x$, $\sum x^2$, and $\sum xy$.

We can then apply all our usual formulae except that to estimate y we must again supply $\ln x$ rather than just x , and when calculating an estimate of x we actually receive an estimate of $\ln x$ so we must find the exponent of this number to obtain the correct estimation. Similar correction processes can be applied to exponential and power regression — see figure 2 — as table 1 shows.

Ivan Soh of Sheffield writes, this program runs on the Casio FX-602P programmable calculator. It solves an $n \times n$ determinant where $n=2, 3$ or 4. These are the most common sizes that are likely to be encountered by students in mathematics course.

The program can easily be adapted to run on the 502P by anyone who has experience of Casio programmable calculators.

```

AC MinF (2)
LBL6 MRF "SIZE ?" HLT INT Min00 (15)
      3 MinF MR00-2=x>=0 GOTO8 (23)
LBL7 "E(SIZE)" PAUSE AC MinF (36)
      GOTO6 (37)
LBL8 x>=F GOTO7 (40)
      MR00 MinF 1 Min18 (44)
      AC Min17 Min19 Min1F (48)
LBL0 1+10*(MR19+1)=Min17 (61)
LBL1 MR1F "a AR17 ?" HLT IND Min18 Min1F (73)
      1 M+17 M+18 (76)
      DSZ GOTO1 (78)
      MRF Min00 (80)
      1 M+19 MR19 x=f IND GOTO0 GOTO0 (87)
LBL2 MR01*MR04-MR03*MR02=GOT05 (97)
LBL3 MR01*(MR05*MR09-MR08*MR06)- (110)
      MR02*(MR04*MR09-MR07*MR06)+ (122)
      MR03*(MR04*MR08-MR07*MR06)= GOT05 (135)
LBL4 (MR01*MR06-MR02*MR05)*(MR11*MR16-MR12*MR15)+ (156)
      (MR03*MR05-MR01*MR07)*(MR10*MR16-MR12*MR14)+ (176)
      (MR01*MR08-MR04*MR05)*(MR10*MR15-MR11*MR14)+ (196)
      (MR02*MR07-MR03*MR06)*(MR09*MR16-MR12*MR13)+ (216)
      (MR04*MR06-MR02*MR08)*(MR09*MR15-MR11*MR13)+ (236)
      (MR03*MR08-MR04*MR07)*(MR09*MR14-MR10*MR13)= (256)
LBL5 Min1F (258)
      AC Min17 Min18 Min19 Min00 (263)
      MR1F "<DET>= AR1F" HLT (275)
      GOTO6 (276)

```

TOTAL STEPS: 276

REGISTER USED: 22 MAX. (R0-R4/R9/R16-R19;F;1F)

LABLES USED: 9(0-8)

Program 1 for Casio FX-602P to solve $n \times n$ determinant. The numbers in brackets at the end of each line are step numbers for checking purposes only.

When the program is called, "Size?" is displayed as a prompt for the user to input the order — that is, the size n of the $n \times n$ determinant of whose evaluation is required. If a decimal number is entered the calculator will evaluate a determinant whose size is the integer of the input value. Should an out-of-range number be input, the error message "E (size)" appears for about a second and then the "Size?" prompt is displayed again.

The first time the program is called, by pressing the program button under which the program is stored, $n=0$ by default. Subsequent evaluations will be performed for

determinants of size $n_k=n_{k-1}$ by default.

Data is asked for in the usual notation a MN where M and N are integers which denote the position of the elements of the determinant. The user enters a 11, a 12 and so on, to evaluate the determinant.

The answer is displayed as <DET> = answer. It is stored in register 1F and hence can be displayed on pressing MR1F.

Note that when Goto n is pressed — where n is the integer-determinant size — the calculation is performed once again and the answer displayed. The elements are stored in the order in which they are

input, beginning with register 01 upwards.

Five other register 00, 17 to 19 and F are utilised when calculations are performed but are cleared at the end of each evaluation.

However, errors have to be input manually. No provision has been made for software corrections of errors because it takes up much more unnecessary program space.

Note that I have optimised the program steps, and the utilisation of registers and labels.

A reader in Haywards Heath, Sussex, has written a program in response to our ladder problem a few months ago.

Program 2. Ladder and box.

| | | | | | | | | | | | | | | | | | | | | |
|-----|----|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|----|-----|-----|----|-----|
| 000 | 76 | LBL | 025 | 10 | 10 | 050 | 04 | 04 | 075 | 00 | 00 | 100 | 30 | SIN | 125 | 95 | = | 149 | 10 | 10 |
| 001 | 11 | A | 026 | 00 | 0 | 051 | 99 | PRT | 076 | 75 | - | 101 | 30 | TAN | 126 | 35 | 1/X | 150 | 95 | = |
| 002 | 02 | 2 | 027 | 32 | X:T | 052 | 43 | RCL | 077 | 43 | RCL | 102 | 94 | +/- | 127 | 65 | X | 151 | 42 | STO |
| 003 | 93 | . | 028 | 00 | 0 | 053 | 02 | 02 | 078 | 00 | 00 | 103 | 75 | - | 128 | 43 | RCL | 152 | 00 | 00 |
| 004 | 07 | 7 | 029 | 00 | 0 | 054 | 65 | X | 079 | 95 | = | 104 | 01 | 1 | 129 | 04 | 04 | 153 | 92 | RTN |
| 005 | 42 | STO | 030 | 00 | 0 | 055 | 01 | 1 | 080 | 42 | STO | 105 | 85 | + | 130 | 95 | = | 154 | 76 | LBL |
| 006 | 00 | 00 | 031 | 71 | SBR | 056 | 00 | 0 | 081 | 00 | 00 | 106 | 43 | RCL | 131 | 65 | X | 155 | 75 | - |
| 007 | 00 | 0 | 032 | 12 | B | 057 | 95 | = | 082 | 42 | STO | 107 | 00 | 00 | 132 | 43 | RCL | 156 | 43 | RCL |
| 008 | 42 | STO | 033 | 76 | LBL | 058 | 99 | PRT | 083 | 03 | 03 | 108 | 95 | = | 133 | 01 | 01 | 157 | 10 | 10 |
| 009 | 01 | 01 | 034 | 13 | C | 059 | 98 | ADV | 084 | 99 | PRT | 109 | 92 | RTN | 134 | 95 | = | 158 | 65 | X |
| 010 | 42 | STO | 035 | 71 | SBR | 060 | 91 | R/S | 085 | 71 | SBR | 110 | 76 | LBL | 135 | 94 | +/- | 159 | 01 | 1 |
| 011 | 02 | 02 | 036 | 75 | - | 061 | 76 | LBL | 086 | 65 | X | 111 | 85 | + | 136 | 85 | + | 160 | 00 | 0 |
| 012 | 42 | STO | 037 | 71 | SBR | 062 | 12 | B | 087 | 42 | STO | 112 | 43 | RCL | 137 | 43 | RCL | 161 | 95 | = |
| 013 | 03 | 03 | 038 | 85 | + | 063 | 43 | RCL | 088 | 05 | 05 | 113 | 02 | 02 | 138 | 02 | 02 | 162 | 42 | STD |
| 014 | 42 | STO | 039 | 71 | SBR | 064 | 00 | 00 | 089 | 99 | PRT | 114 | 75 | - | 139 | 95 | = | 163 | 10 | 10 |
| 015 | 04 | 04 | 040 | 12 | B | 065 | 42 | STO | 090 | 98 | ADV | 115 | 43 | RCL | 140 | 99 | PRT | 164 | 43 | RCL |
| 016 | 42 | STO | 041 | 43 | RCL | 066 | 02 | 02 | 091 | 92 | RTN | 116 | 03 | 03 | | | | 165 | 08 | 00 |
| 017 | 05 | 05 | 042 | 04 | 04 | 067 | 99 | PRT | 092 | 76 | LBL | 117 | 95 | = | 141 | 98 | ADV | 166 | 55 | ÷ |
| 018 | 93 | . | 043 | 67 | EQ | 068 | 71 | SBR | 093 | 65 | X | 118 | 42 | STO | 142 | 65 | X | 167 | 01 | 1 |
| 019 | 01 | 1 | 044 | 14 | D | 069 | 65 | X | 094 | 43 | RCL | 119 | 01 | 01 | 143 | 43 | RCL | 168 | 00 | 0 |
| 020 | 42 | STO | 045 | 61 | GTO | 070 | 42 | STO | 095 | 00 | 00 | 120 | 43 | RCL | 144 | 10 | 10 | 169 | 95 | = |
| 021 | 00 | 00 | 046 | 13 | C | 071 | 04 | 04 | 096 | 55 | + | 121 | 04 | 04 | 145 | 95 | = | 170 | 42 | STD |
| 022 | 01 | 1 | 047 | 76 | LBL | 072 | 99 | PRT | 097 | 03 | 3 | 122 | 75 | - | 146 | 59 | INT | 171 | 00 | 00 |
| 023 | 00 | 0 | 048 | 14 | D | 073 | 98 | ADV | 098 | 95 | = | 123 | 43 | RCL | 147 | 55 | ÷ | 172 | 92 | RTN |
| 024 | 42 | STO | 049 | 43 | RCL | 074 | 43 | RCL | 099 | 22 | INV | 124 | 05 | 05 | 148 | 43 | RCL | | | |

**the vic
centre**

Big savings for starters

If you're looking for a home computer, you'll already know that the VIC does it all. To help you get started, we have put together this attractive cost-saving package.

VIC-20 Colour computer



- + Cassette Deck
- + 10 Blank Cassettes
- + Introduction to Basic Part 1
- + User Manual

- + 12 months warranty
- + Fitted 13 amp plug

for only

£ 212

(price plus VAT £243.80)

NEW

Convert your VIC to a 40 Column 32k machine with this exciting new add-on

32k RAM Expansion + 40 column screen format
£199.95 plus VAT

40 column screen format only
£99.95 plus VAT

Dot Matrix Printer

Tractor feed, 80 characters per line at 30 characters/seconds.
£199.96 plus VAT

Memory Expansion Board

Multi-slot unit used to accept memory and/or game and program cartridges
£85.00 plus VAT

Plug-in Memory Expansion Cartridges

3k - **£26.04**, 8k - **£39.09**,
16k - **£65.17 plus VAT**

Single Drive Floppy Disk Unit
£395.00 plus VAT

The standard features of the Vic are: ★ 5K RAM expandable to 32K ★ 16 screen colours ★ 8 character colours ★ 3 tone generators, each of 3 octaves - plus white noise generator ★ Screen display 22 characters × 23 lines deep ★ Full PET type graphics ★ High resolution graphics capability ★ 8 programmable special functions.

Goods required

Price

| | |
|--|--|
| | |
| | |
| | |
| | |

Add £4.00 post, packing and insurance for special deal and £1.00 post, packing and insurance for all other items. Add 15% to all prices for VAT

Total £

Name: _____

Address: _____

MAIL ORDER to: Adda Home Computers Ltd.
FREEPOST, London W3 6BR or telephone your order (24 hours a day) to 01-992 9904 quoting your Visa, Access or American Express number.

*I enclose a cheque, made payable to Adda Home Computers Limited for

£
*Please charge my Visa/Access/American Express account. My account number is

*Please add my name to your mailing list
*Delete as applicable

Date:

SHOP ADDRESS: Adda Home Computers Ltd.
154 Victoria Road, Acton, London, W3.
(near North Acton tube station)
Tel 01-992 9904
OPEN: 10am-6pm (Tuesday-Friday),
10am-5pm (Saturday).

TERMS AND CONDITIONS: All goods sold subject to Adda terms and conditions of sale. Full details available on request, but include: 7 day money back guarantee, Adda 12-month hardware warranty. Please allow 21 days for delivery. Allow 7 days for personal cheques to be cleared. Quoted prices are exclusive of VAT.

adda



ZX81 16k SOFTWARE

All our software comes with full instructions and is **SAVED** and ready to **RUN**, no need to spend hours laboriously typing in from books.

PACK 16/1 includes all of:

AIR TRAFFIC CONTROL: Animated radar screen of busy airport shown, you must bring planes into land;
INVADERS SELF PLAY: PHONEBOOK — keep friends' and relatives' numbers on cassette; **DATE '81** — computer dating program. Who will it pick for you?
ALL ONLY £4.95

PACK 16/2 includes all of:

ADVENTURE ATLANTIC: You may become very rich or you may be marooned forever; **BREAKOUT:** SQUASH PRACTICE; **LANGUAGE TRANSLATOR** translates any European language to any other; **COMPUTAPRINT** — use this program to predict results of horse races, football pools, etc.
ALL ONLY £4.95

PACK 16/3 includes all of:

INDI 500: video roadrunner; **DRAUGHTS:** Computer Chequers; **BATTLESHIPS** — nautical warfare on your own computer.
MASTERMIND — Brain Teaser, see if you can beat a microelectronic mind.
ALL ONLY £4.95

The breakthrough you've waited for:

PROGRAM THE ZX81 IN ENGLISH!!!

With **GAMAL 81** you can now write adventure programs in hours not weeks and with **GAMAL 81** you'll have every adventure you'll ever want for the price of one. Comes on cassette with instruction book, £7.95

CONTROL TECHNOLOGY — PERSONAL COMPUTER SCIENCE

Cassette 1½

A super value cassette of 16K and 1K software written in Machine Code and Basic.

Includes:

React, Invaders, Phantom Aliens, Maze of Death, Planetlander, I Ching, Hangman, Invaders, Laser Base, rectangle plus more.

ALL ONLY £4.95

Tapebook 50, Version 3

50 programs for the IKRAM ZX81.

Latest version includes:

SQUASH, BREAKOUT, COLUMBIA, SPLAT, INTEGRATION, CREDIT CARD CALCULATOR, BANK A/C, VATCHECK, TANK BATTLE, TORPEDO, HEXLOADER, BINARY CONVERTER, AND LOTS, LOTS MORE.

Still amazing value at **£8.95** the lot.

ZX~81

PACK 16/1 + 16/2 + 16/3

(any two only £5.95)

ALL THREE ONLY

£8.95

TAPEBOOK 50.3 + CASSETTE 1½

BOTH ONLY

£9.95

BOTH OFFERS ARE ONLY £13.95

SPECIAL OFFER

TO ALL ZX81 OWNERS

All prices include VAT and postage and packing

CONTROL TECHNOLOGY,
39 Gloucester Road, Gee Cross,
Hyde, Cheshire SK14 5JG
061-368 7558



Ctech Software Simply Megabytes Ahead!

AT M

DEFENDER: You defend the planet against UFO's, fast moving. Hires Graphics, Sound effects, Thrust, Laser Torpedo, climb, descend, superbly detailed **G4 + T5 £4.00**

ASTRO BATTLEZONE: fastened in the cockpit of your starcruiser, you view the 3D graphics of the earth revolving silently below, staring down your head up display you suddenly glimpse the enemy hurtling towards you, you turn at them, the horizon rolls over, the engines roar as you climb to the stars **G4 + T5 £5.00**

FRUIT MACHINE: Our version has HiResgraphics, nudge, collect, respin, gamble and even plays "Oranges and Lemons" when you win **G3 + T5 £4.00**

POLECAT: Countryside Pacman, you must move your Rabbit through the underground maze, but you are being chased by a polecat so you must run like a rabbit until you've collected all your your carrots growing on the top of the Burrow. **G4 + T5 £5.00**

MINFIELD: You must steer your way through a perilous minefield without exploding any mines; blasting mines can cause chain reactions. **G0 + T5 £5.00**

EARLY WARNING: Atomic Missile Command, destroy the attacking ICBMs using a realistic radar screen and intercept missiles. **G4 + T5 £5.00**

N.B. G = GRAPHICS T = TEXT

ANY 3 ONLY £9.00

**Control Technology, 39 Gloucester Rd,
Gee Cross, Hyde, Cheshire SK14 5JG.**

All prices include VAT, P&P.

For other Products, see our advert on page 60



Full Colour and Superb Sound

VIC-2

SOFTWARE

*Our latest VIC 20 package is **VICSOFT 7**
and includes all of —*

BREAKOUT: The noisiest and most colourful you've ever seen.

SQUASH: Will you make a tournament champion?

DEATHRACE 2000: Driving in a crazy road race you must run over as many pedestrians as you can!!

SOUNDS: A sound effects synthesizer program. Everything from helicopters to birds of paradise — menu driven.

MOROIDS: Your astronaut must avoid the asteroids, very fast graphics!!

MASTERMIND: See if you can beat a microelectronic mind at this full colour brain teaser!

WARLORDS: Protect your castle from giant boulders!!

**VICSOFT 7 costs just £5.95 and
that's inclusive.**

SOFTWARE FILE

Software File gives you the opportunity to have your programs, ideas or discoveries published. We will accept contributions for any personal computer and will group programs for like machines together in the file. Please double-check your listings before sending them, and specify the memory they require. Mark your letter clearly for *Your Computer*. We will pay £6 for each contribution published.

Breaking out

*J D H Jones,
Bangor on Dee,
Clwyd.*

MY PROGRAM is a simple version of Breakout using almost entirely Peeks and Pokes.

Control is achieved using the Z key for left and the C key for right. First the computer draws a multicoloured wall using lines 15 to 70. A dot then appears at a random position along the bottom, the ball proceeds to bounce against the wall and the sides knocking out a brick every time it hits the wall.

You have a bat with which you must bounce

the ball back up the screen to knock out another brick. If, by missing it, you let the ball reach the bottom row, you lose one of four chances. Eventually, if you do not lose all your lives you will break out of the top of the wall and win the game.

During my experiments with this program I discovered that it could be converted for use with joysticks by adding lines 13 to 470 shown at the end of the program. These extra lines allow you to use the joysticks with up for left, and down for right.

```

13 POKE 37139,0; POKE 37154,127
110 S = PEEK(37137)
140 IFS = 174THEND = D - 1:POKE 8145 + D,32
150 IFS = 182THEND = D + 1:POKE 8141 + D,32
470 POKE 37154,255:END

```

```

2 REM*****BREAKOUT*****
3 REM***BY DAVID JONES***
4 REM      11/1/82
5 PRINT"□":POKE36879,9
6 PRINT" THIS IS THE GAME OF"
7 PRINT"      BREAKOUT":PRINT:PRINT"THE Z-KEY MOVES LEFT":PRINT"THE C-KEY MOVE
S RIGHT"
8 PRINT:PRINT" HIT ANY KEY TO PLAY"
9 GETA$:IFA$=""THEN9
10 POKE36878,15:Y=20:DY=-1:C=4:GOSUB1000:PRINT"□"
15 FORJ=2TO7
20 FORI=0TO21
30 POKE38444+I+(J-2)*22,J
40 NEXTI:NEXTJ
50 FORI=0TO131
60 POKE7724+I,160
70 NEXTI
75 POKE7680+X+22*Y,81
80 POKE8142+D,98
90 POKE8143+D,98
100 POKE8144+D,98
110 S=PEEK(197)
140 IFS=33THEND=D-1:POKE8145+D,32
150 IFS=34THEND=D+1:POKE8141+D,32
160 IFD<0THEND=0
170 IFD>19THEND=19
180 POKE7680+X+22*Y,32
190 X=X+DX
200 IFX<10RX>20THENDX=-DX:POKE36876,220
210 Y=Y+DY
220 IFY=22THEN300
225 IFY=0THEN400
230 IFPEEK(7658+X+22*Y)=160ANDDY=-1THENDY=1:POKE36876,230:POKE7658+X+22*Y,32
240 IFPEEK(7702+X+22*Y)=98THENDY=-1:POKE36876,240
250 POKE36876,0
260 GOTO75
300 POKE36874,140
310 FORI=0TO1000:NEXT
320 POKE36874,0
330 C=C-1
340 PRINT"*****YOU HAVE ";C;"CHANCES"
343 FORT=0TO1500:NEXT
345 FORK=0TO34:POKE7922+K,32:NEXT
350 IFC>0THEN:Y=20:DY=-1:GOSUB1000:GOTO75
355 GOTO460
400 FORU=0TO5
410 POKE36875,240
420 FORI=1TO90:NEXTI
430 POKE36875,0
440 NEXT
450 PRINT"  CONGRATULATIONS      YOU'VE DONE IT"

```

(continued on next page)

(continued from previous page)

```
455 PRINT "XXXXXXXXXXXX"
460 POKE 36878,0
470 END
1000 X=INT(RND(1)*20)+1
```

```
1010 DX=INT(RND(1)*3)-1
1020 IF DX=0 THEN 1010
1030 RETURN
READY.
```

Mystery program

C E Lowe,
Ashton-Under-Lyne,
Greater Manchester.

ZX-81

THIS IS A short program which enables a Basic instruction to be translated into machine code without the use of an interpreter or assembly code. When you have finished entering it, simply press Run and all will be made clear.

ROM tricks

Stephen Betts,
Eaton Bray,
Bedfordshire.

ZX-81

TONY POULTER'S noughts and crosses program, which appeared in the February issue, works perfectly in 1K but not if loaded into an extended ZX-81. This is because with more than 3.25K RAM connected, the display file is expanded by the ROM to fill the screen.

To trick the ROM into setting up a minimal display file, type either as a direct command, or as line 20:

POKE 16389,68

This command followed by the CLS in line 23 sets the system variable RAMtop to 17408 as it is when only 1K RAM is connected. As Tony Poulter says, if the length of his program is altered you should recalculate the variable P by using the expression

(PEEK 16396 + PEEK 16397 * 256) - 28

Electronic keep-fit

A J Capper,
Bristol.

ATOM

THIS PROGRAM incorporates the best features from a variety of sources to provide a disciplined approach to regaining fitness. One of the problems in our society today is that we do not get enough exercise, and computer addicts are worse than most. So it seems reasonable to use your micro to help you to get fit and stay fit.

The program uses the concept of pulse-regulated exercises, a concept pioneered in the U.S. and in the City Gymnasium in London. This is based on the idea that the maximum pulse rate that should be reached during exercise will vary with the age of the person doing the exercise, and for this stage one program, the relationship is:

Training Pulse Rate = (200 - Age) × 60%

This is the value given to the variable %P in line 3, and is the rate at which the bell will sound due to lines 94 and 95, so that you can check your pulse rate at the end of the session. As long as your pulse beats no faster than the TPR, you will not be overstraining your heart — but check it promptly as the pulse rate soon drops when you rest.

The basic routine starts with 10 repetitions

LOWE MYSTERY PROGRAM

```
10 LET A = 16509
15 PRINT TAB 2; PEEK A * 256 + PEEK (A + 1);
20 LET L = PEEK (A + 2) + 256 * PEEK (A + 3) - 1
25 LET A = A + 3
30 FOR N = 1 TO L
35 IF PEEK (N + A) <> 126 THEN GOTO 50
40 LET N = N + 5
45 GOTO 55
50 PRINT CHR$ (PEEK (N + A));
55 NEXT N
60 LET A = A + N + 1
65 IF A < 16914 THEN GOTO 15
70 LET A$ = "9B25.885"
75 FOR N = 1 TO LEN A$
80 FOR J = 1 TO 50
85 NEXT J
90 PRINT AT 15,12 + N; CHR$ (CODE A$ (N) + 144)
95 NEXT N
```

FOR ZX81 IN SLOW MODE

FOR ZX80 WITH 8K ROM. CHANGE THE FOLLOWING LINES.

```
65 IF A < 16924 THEN GOTO 15
80 PAUSE 60
85 POKE 16437,255
```

of each exercise, followed by one minute of running on the spot. If you have no problem in doing this within your TPR, then you can increase the grade number up to a suggested maximum of grade 10.

An increase of one in the grade number increases the number of repetitions by one, and increases the time for running on the spot by 0.4 minutes, so that on the highest grade you will do 20 repetitions followed by running on the spot for five minutes — a total exercise time of around 25 minutes.

For those who do not feel fit enough to start at grade 0, which is the basic routine, the program allows you to have a handicap system with a negative grade number. There can be a maximum handicap with grade -9, which takes you down to one repetition of each exercise, followed by running on the spot for six seconds, which even the most unfit of us should be able to manage.

There is a considerable latitude in each exercise with regard to the degree of difficulty, or effort put in, so that each person can develop a routine which will fit their exact needs. The important point is to find a suitable starting routine which makes you work but which imposes no real strain, and then do that routine once each day for at least a week before moving up to the next grade.

Here is a description of the exercises. The first five are warm-up exercises, and it is really only on the last four that you start work.

Stand feet astride with arms at your side. One repetition of arm circling consists of lifting your arms slowly in a big circle, trying to brush your ears as you pass, and then bringing arms back to the starting point. Stretch as much as you can.

For side bends, stand feet astride with arms at your side. Bend first to the left and slide the left hand down the outside of the leg as far as you can go, then return to upright position. Do not bend forward or backward. Repeat on the right-hand side.

The trunk-and-knees bend involves your standing with feet together, weight on the front of the feet, legs slightly bent. Raise the left thigh up towards the chest as far as possible, and bend back down towards knee. Lower leg to floor and stand upright. Repeat on the right-hand side.


Stand with feet apart and both arms stretched out to the front for the head-and-arm twists. Leave the right arm pointing to the front and twist the left arm and trunk until it points directly behind you. Return to the start position and repeat with the right arm.

For the ankle reach stand with feet wide

(continued on page 75)

The Essential Software Company

47 Brunswick Centre, London WC1N 1AF

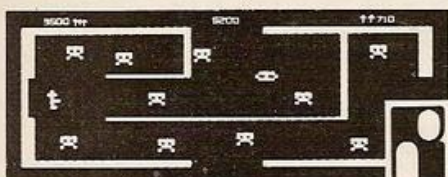

TRS 80 Levels II 16 K Tape
Video Genie 16 K Tape

The Newest and Most Astounding Arcade Game that TALKS has just Reached Planet Earth. You can't help yourself. You have to stop them at all cost. Don't let up. Written especially for high quality graphics you'll simply be dazed and excited by the action.

ROBOT ATTACK



DEFENSE COMMAND

TRS 80 Levels II 16K Tape
Video Genie 16K Tape

It is the year 2734. Our planet has chosen you to carry out the most important mission of the decade. The following is your top-secret mission briefing!


Several months ago the Kromorkrom Empire invaded our planet and stole some of our newly developed and highly efficient "Krotrium" Star Cruiser fuel cells. Your mission is to infiltrate the Kromorkrom Empire and pass yourself off as commanding officer of one of their fuel transport vessels. Once you have accomplished this, you must recover the fuel so that one of our Star Cruisers can warp in and take it back to our planet. You will be given a small shuttle armed with a powerful laser device. Eventually the aliens will uncover your plot and you will be forced to shoot and destroy them to protect the fuel. While you are defending at least one fuel cell, the aliens will be unable to use any of their high-powered battle equipment, for fear of accidentally destroying a fuel cell. Once the aliens have reclaimed all of the fuel cells they will then be able to unleash their newest and most terrifying weapon ever: the Solar Waster!

GOBBLE MAN



Watch out behind you! As you hurry through the maze collecting modules you score points. But don't let the Gobblemen catch you. If you are crafty, sneak up behind them and neutralise them to gain extra points. Just keep a watch. When they attack you they come in fast. Just don't lose your nerve.

TRS 80 Levels II 16 K Tape
Video Genie 16 K Tape



Attack Force

Dodge the alien Ramships and fire missiles to destroy them before they get you. The alien Flagship uses his deadly laser bolt to transform a Ramship into another Flagship or into your ship's double. Look out! Destroy your double and you could destroy yourself.

TRS 80 Level II 16K Tape
Video Genie EG3003 16K Tape

SCOTT ADAMS ADVENTURES

1-10

and

3D Adventures


for
TRS 80
LEVEL II
16K

3-D means that as you wander through the mazes and buildings, full screen graphic display constantly shows your position in a perspective format as though you were actually there! This "rat's eye" view adds an entirely new dimension to adventure.

English language commands can be entered at any time to manipulate your environment. The command sets are extensive and sophisticated. Dozens of objects are scattered throughout the mazes and buildings. You can pick them up, burn them, throw them, etc. You may need the sword to fight off an ugly little man. Or a steel rod to hold apart crushing walls. Deathmaze 5000 and Labyrinth allow the traditional one and two word commands. Asylum incorporates our Advanced Language Interpreter (ALI), which allows full sentence input.

Deathmaze and Labyrinth consist of over 550 locations!
Asylum tops 1200 locations!

Cosmic Fighter

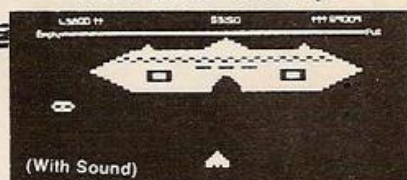

Your fighter appears below a convoy of Aliens! If you destroy them another set appears who seem to be slightly cleverer than before! Soon your space station nears but before you can dock the station comes under attack! Survival is up to you! The excitement is just beginning!!

TRS 80 Level II 16K
Video Genie 16K Tape

All Tapes £10 ea

THE ESSENTIAL SOFTWARE COMPANY
(Viscounti Ltd.) 01-837 3154
47 Brunswick Centre, London WC1N 1AF

I have a microcomputer.
Please send me your software catalogue. I
enclose a stamped self addressed envelope.
Please send me
I enclose a cheque / postal order for £
(plus 50p post & packing)

Signature

Name

Address

Postcode

My ACCESS No is

ASYLUM Tape £12

NOBODY CAN GET NEAR OUR PRICES EXCEPT OUR CUSTOMERS



MICROLINE 80 £289 + VAT

• 80 cps Uni-directional • Small size: 342 (W) x 254 (D) x 108 (H) mm. • 160 Characters, 96 ASCII and 64 graphics • 3 Character sizes: 40, 80 or 132 chars/line • Friction and Pin Feed • Low noise: 65 dB • Low weight: 6.5 kg

MICROLINE 82 £449 + VAT

• 80 cps Bi-directional logic seeking • Small size: 360 (W) x 328 (D) x 130 (H) mm. • 160 characters, 96 ASCII and 64 graphics, with 10 National character-set Variants. • 4 Character sizes: 40, 66, 80 or 132 chars/line. • Built-in parallel and serial interfaces. • Friction and Pin Feed • Low noise: 65dB • Low weight: 8kg

MICROLINE 83 £649 + VAT

• 120 cps bi-directional logic seeking • 136 column printing on up to 15in forms • Small size: 512 (W) x 328 (D) x 130 (H) mm. • 160 characters, 96 ASCII and 64 graphics with 10 National character-set variants • 3 Character spacings: 5, 10 and 16.5 Chars/in. • Built-in parallel and serial interfaces • Friction and Pin Feed • Low noise 65dB • Low weight: 13 kg

THE EPSON MX SERIES



MX80T £339 + VAT
MX80F/T £389 + VAT

- 80/132 Column
- Centronics Parallel
- Bi-directional
- Upper & lower case
- True Descenders
- 9x9 Dot Matrix
- Condensed and Enlarged Characters
- Interfaces and Ribbons available



CENTRONICS DOT MATRIX PRINTERS

737 £369 + VAT
739 £469 + VAT

- Standard Features**
- Proportional Spacing • Right Margin Justification • 3 way paper handling • Upper and lower case • True Descenders • Bi-directional Paper Mode • Underlining capability • Condensed/Expanded Print • Sub-Scripts and Super Scripts • Pin and Friction Feed • 80/132 Column

739 as above with special feature of Dot Resolution Graphics.

INTRODUCING THE NEW GENIE

Ideal for small businesses, schools, colleges, homes, etc. Suitable for the experienced, inexperienced, hobbyist, teacher, etc.



GENIE I

STILL ONLY £279 + VAT

NOW INCLUDED: Sound, Upper and lower case, Extended BASIC and Machine Code enabling the Writing and Execution of Machine Codes Programming direct from Keyboard. 16K RAM. 12K Microsoft BASIC Extensive Software Range. Self-Contained PSU UHF Modulator Cassette. External Cassette Interface. Simply plugs into TV or Monitor. Complete and Ready to Go. Display is 6 lines by 32 or 64 Characters Switchable. 3 Manuals included, Users Guide, Beginners Programming and BASIC Reference Manual. BASIC Program Tape Supplied. Pixel Graphics.




GENIE II

£299 + VAT

The **NEW GENIE II** an ideal Business Machine. 13K Microsoft BASIC in ROM. 71 Keyboard. Numeric Keypad. Upper & Lower Case. Standard Flashing Cursor. Cassette Interface 16K RAM Expanded externally to 48K.

GENIE I & II EXPANSION UNIT WITH 32K RAM £199 + VAT

PARALLEL PRINTER INTERFACE CARD £35.00 + VAT



TEAC DISK DRIVES

- TEAC FD-50A has 40 tracks giving 125K Bytes unformatted single density capacity.
- The FD-50A can be used in double density recording mode.
- The FD-50A is Shugart SA400 interface compatible.
- Directly compatible with Tandy TRS80 expansion interface.
- Also interfaces with Video Genie, SWTP, TRS80, North Star Horizon, Superbrain, Nascom, etc, etc.
- Address selection for Daisy chaining up to 4 Disks.
- Disks plus power supply housed in an attractive grey case.

| | | |
|-------------------|-------------------|-------------------------------------|
| 40 TRACK | | |
| Single Disk Drive | £225 + VAT | Double Disk Drive £389 + VAT |
| 77 TRACK | | |
| Single Disk Drive | £299 + VAT | Double Disk Drive £499 + VAT |

SALE MEMORY UPGRADES
16K (8 x 4116) **£12.90 + VAT**
4K CompuKit (8 x 2114) **£12.90 + VAT**

WE HAVE ONE OF THE LARGEST COLLECTIONS OF COMPUTER BOOKS UNDER ONE ROOF, ALONG WITH SOFTWARE FOR THE GENIE, TRS80 AND APPLE.

THE ANADEX DP9500 and DP9501 A PROFESSIONAL PRINTER



- Bi-directional printing
- Up to 220 chars/line with 4 print densities
- 500 char buffer
- RS232C and Centronics.
- Parallel interface built in
- Full software control of matrix needles allowing graphics capability
- 200 chars/sec
- Adjustable width tractor feed.

DP9500 — ONLY £845 + VAT
DP9501 — ONLY £895 + VAT

WE ARE NOW STOCKING THE APPLE II AT REDUCED PRICES



AUTOSTART EURO PLUS

48K £649 + VAT

Getting Started APPLE II is faster, smaller, and more powerful than its predecessors. And it's more fun to use too because of built-in features like:
• **BASIC** — The Language that Makes Programming Fun.
• **High-Resolution Graphics** (in a 54,000-Point Array) for Finely-Detailed Displays.
• **Sound Capability** that Brings Programs to Life.
• **Hand Controls** for Games and Other Human-Input Applications.
• **Internal Memory Capacity** of 48K Bytes of RAM, 12K Bytes of ROM; for Big-System Performance in a Small Package.
• **Eight Accessory Expansion Slots** to let the System Grow With Your Needs.

You don't need to be an expert to enjoy APPLE II. It is a complete, ready-to-run computer. Just connect it to a video display and start using programs (or writing your own) the first day. You'll find that its tutorial manuals help you make it your own personal problem solver.

APPLE DISC II 3.3 Dos

Disc with Controller **£339 + VAT**
Additional Drives **£289 + VAT**



- Powerful Disk Operating Software Supports up to 6 drives
- Name Access to Files for Ease of Use
- BASIC Program Chaining to Link Software Together
- Random or Sequential File Access to Simplify Programming
- Dynamic Disk Space Allocation for Efficient Storage
- Individual File Write Protection Eliminates Accidental File Alterations
- Loads an 8K Byte Binary Image in 6.5 sec. (1.2 sec. in Pascal)
- Storage Capacity of 116 Kilobytes (143K Bytes with Pascal) on Standard 5 1/4" Diskettes
- Powered Directly From the APPLE (Up to 6 Drives) for Convenience and High Reliability
- Packaged in Heavy Duty, Colour Coordinated Steel Cabinet

Colour Monitors for Apple — **£295 + VAT**



ACORN ATOM UNIQUE IN CONCEPT — THE HOME COMPUTER THAT GROWS AS YOU DO

Fully Assembled **£157.50 + VAT** inc. PSU



- Special features include:
- Full Sized Keyboard
 - Assembler and Basic
 - Top Quality Moulded Case
 - Optional High Resolution Colour Graphics
 - 6502 Microprocessor

4K FLOATING POINT ROOM £19.50 + VAT
COLOUR ENCODER £19.00 + VAT

We give a full one year's guarantee on all our products, which normally only carry 3 months guarantee.

A SELECTION OF APPLE INTERFACES ARE NOW AVAILABLE AT OUR EDGWARE ROAD SHOWROOM

LUXOR 14" COLOUR MONITOR FOR THE APPLE £295 + VAT

SOFTWARE FILE

(continued from page 72)

apart, both hands on left thigh. Slide hands down as far as possible towards the ankle. Return to upright position and repeat towards the right ankle.

At the start of these routines I advise you to do press-ups against a wall. Stand just further away than your outstretched fingertips and allow your body to fall towards the wall. Then push with your arms back to the vertical position. One repetition in this case equals two pushes.

If this causes no problems you can progress

to doing the pushes against the top edge of a filing cabinet, which increases the work-rate somewhat. Again, one repetition equals two pushes. When you are used to this exercise you can progress to pushes against the edge of a table. This will require more effort, and one repetition equals one push.

For the seated knees-up, sit comfortably on a chair and grip the rear edge. Raise your knees as far as possible in the direction of your chest, then extend your legs forward and gradually lower them to the ground.

Overweight or very unfit persons are

advised to treat the static jump with caution. Stand with feet together and arms by your side. One repetition consists of one jump in the air — the height will depend on how fit you are. At first you should be content just to lift both feet off the ground, but as you become fitter you can try to leap as high as you can.

In running on the spot, each pace is carefully timed, so that you do one pair of steps per second to start with, but they become very slightly faster as you progress through the grades.

```

1 P.$12;@=0
2 P."ISOTONICS STAGE ONE"
3 IN."PLEASE ENTER AGE" A;ZP=132-3*A/5
4 P.;IN."PLEASE ENTER GRADE NO." G
5 P.$12;F.W=1 TO 8
6 IF W=1 P."ARMS CIRCLING"
7 IF W=2 P."SIDE BENDS"
8 IF W=3 P."TRUNK/KNEES BEND"
9 IF W=4 P."HEAD/ARM TWISTS"
10 IF W=5 P."ANKLE REACH"
11 IF W=6 P."BODY PUSH"
12 IF W=7 P."SEATED KNEES UP"
13 IF W=8 P."STATIC JUMP"
14 F.Z=1 TO 13000;N.Z;P.$7
15 F.N=1 TO (10+G)
17 Y=12000-100*G
20 F.E=1 TO Y;N.E
30 P.$7
40 N.N
50 F.X=1 TO 5;P.$7;N.X
60 N.W
70 P."RUNNING ON THE SPOT"
75 Q=13000-G*250
80 F.Z=1 TO Q;N.Z
81 IF G<0;F.T=1 TO (120+12*G);G.83
82 F.T=1 TO (120+48*G)
83 V=710-5*G
85 F.R=1 TO V;N.R;P.$7
87 N.T
90 F.F=1 TO 25;P.$7;N.F;@=0
91 P."YOUR TRAINING PULSE RATE OF"
    Z(ZP)" BEATS PER MINUTE"
92 "WILL NOW SOUND"
94 ZB=10100/ZO;B=Z(ZB)
95 PF.P=1 TO B;N.;P.$7;G.P
100 E.
```

Read and Data

J D Tarrant,
Malvern Wells,
Worcestershire.

ATOM

THE LACK OF Read and Data on the Atom is a great disadvantage. My solution uses arrays to store Data and a variable to keep track of which element is to be Read next. The Data is read back to another variable by using the counter to define which element of the array is to be used next. This, I think, is a better way of achieving Read and Data than described in

the manual because it uses much less memory.

Data can be input by using a For-Next loop and storing each entry in a separate element of the array. It can then be read back using this technique.

Restore can be achieved by setting the counter to zero. The computer can be instructed to go back, or indeed forward, to any number in the array at any point in the program by setting the counter to the element to be jumped to.

Strings can be used by this method by using the technique of dimensioning described by

Derek Haslem, *Your Computer*, October 1981. Floating-point numbers can also be used by using fp arrays. Here is an example listing:

```

1 DIM AA(3); N=0
5 AA(0)=10; AA(1)=20; AA(2)=30; AA(3)=40; REM STORE DATA
10 REM PIECE OF PROGRAM
100 Q=AA(N); N=N+1; REM READ DATA; INCREMENT COUNTER
110 REM PIECE OF PROGRAM
200 IF N=4 THEN END; REM STOP IF NO DATA LEFT
210 PRINT Q
230 GOTO 100
```

```

1 DIM AA(3); N=0
5 AA(0)=10; AA(1)=20; AA(2)=30; AA(3)=40; REM STORE DATA
10 REM PIECE OF PROGRAM
100 Q=AA(N); N=N+1; REM READ DATA; INCREMENT COUNTER
110 REM PIECE OF PROGRAM
200 IF N=4 THEN END; REM STOP IF NO DATA LEFT
210 PRINT Q
230 GOTO 100
```

Lunar manoeuvre

S S Grewal,
Southall,
Middlesex.

ZX-81

THE INSTRUCTIONS to play this game are included in the listing with the user choosing how much fuel to burn. Just to prove how difficult my program is, I have to admit that I have never landed safely.

```

1 CLS
5 REM LUNAR LANDER
10 REM BY SSG 3-1-82
15 PRINT "INSTRUCTIONS? (Y/N)"
20 INPUT I$
```

(continued on next page)

(continued from previous page)

```

25 IF I#="N" THEN GOTO 95
30 REM INSTRUCTIONS
35 PRINT "WHILE FLYING A LOW ORBIT MAPPING"
40 PRINT "MISSION ON THE MOON, YOUR CRAFT"
45 PRINT "HAS HIT AN ASTEROID. YOU ARE "
50 PRINT "SAFE INSIDE YOUR EJECTED SPACE"
55 PRINT "CAPSULE WHEN YOU DISCOVER THAT"
60 PRINT "YOUR AUTOMATIC DESCENT COMPUTER"
65 PRINT "HAS FAILED. YOUR MAIN THRUST "
70 PRINT "UNIT IS FALTERING BUT MAY GET "
75 PRINT "YOU DOWN SAFELY."
76 PRINT "TO SAVE THE CAPSULE YOU MUST "
77 PRINT "LAND AT LESS THAN 2FT/SEC. TO "
78 PRINT "SURVIVE YOU MUST LAND AT LESS "
79 PRINT "THAN 5FT/SEC. CAPSULE INSTRUM-"
80 PRINT "ENTATION IS OK AND WILL TELL "
85 PRINT "YOU WHERE YOU ARE. REMEMBER, "
90 PRINT "GRAVITY WILL ADD 5FT/SEC. TO "
91 PRINT "YOUR DESCENT."
92 PRINT
93 PRINT "GOOD LUCK"
94 PAUSE 1400
95 CLS
96 REM L=LIMIT OF BURN
100 LET L=INT(RND*(10)+25)
110 PRINT
120 PRINT "YOUR ENGINES ARE CAPABLE OF A "
125 PRINT "MAX. BURN OF"; L;"FT/SEC."
130 REM INITIALIZE DATA:T=TIME,H=HEIGHT,V=VELOCITY,F=FUEL LEFT
135 LET T=1
140 LET V=INT(RND*75)-75
145 LET H=INT(RND*300)+200
150 LET F=120
155 PRINT
160 PRINT "MANUAL DESCENT MODE ENGAGED"
165 PRINT
170 PRINT "TIME HEIGHT VELOCITY FUEL BURN"
175 PRINT "SEC. (FEET) (FT/SEC) LEFT"
180 PRINT TAB 1;T;TAB 7;H;TAB 15;V;TAB 22;F
185 INPUT B
190 IF B>L THEN B=L
195 IF F<=0 THEN LET B=0
200 IF B+100<=100 THEN LET B=0
210 LET F=F-B
215 REM B=BURN
220 LET T=T+1
225 LET V=V+5+B
230 LET H=H+V
235 LET E=RND*(12)
240 IF E<9 AND E>6 THEN GOSUB 500
245 REM VARIABLE "E" DETERMINES THRUST FAILURE
250 IF F<=0 THEN GOTO 290
255 IF H<=0 AND V+100=95 THEN GOTO 325
260 IF H<=0 AND V+100=98 THEN GOTO 310
265 IF H>0 THEN GOTO 180
270 PRINT "CONGRATULATIONS."
271 PRINT "YOU HAVE LANDED SAFELY"
275 PRINT "YOUR VELOCITY AT TOUCHDOWN WAS"
276 PRINT V;"FT/SEC."
280 PRINT "WITH ";F;"UNITS OF FUEL LEFT"
281 PAUSE 500
285 GOTO 360
290 PRINT "OUT OF FUEL"
295 IF H>0 THEN GOTO 180
300 GOTO 325
301 CLS
310 PRINT "YOU HAVE MADE A CONTROLLED "
311 PRINT "CRASH. YOU ARE ALIVE BUT THE"
312 PRINT "LANDER IS DAMAGED AND YOU ARE"
315 PRINT "***STRANDED***"
316 PAUSE 500
320 GOTO 275
321 CLS
325 PRINT "CRUNCH. YOU HAVE JUST BECOME "
330 PRINT "THE MOON'S NEWEST CRATER. YOUR"
331 PRINT "FLIGHT PAY WILL BE FORWARDED"
332 PRINT "TO YOUR NEXT OF KIN"
333 PAUSE 500
335 GOTO 275
340 PRINT
360 PRINT
365 PRINT "LIKE TO TRY AGAIN?(Y/N)"
370 INPUT X$
375 IF X$="Y" THEN RUN
380 IF X$<>"Y" AND X$<>"N" THEN GOTO 370
385 STOP
500 REM DERIVE LEVEL OF THRUST FAILURE
505 LET L=INT(L-(RND*(10)+1))
510 IF INT(L+100)<=100 THEN GOTO 530
515 PRINT "DETERIORATION IN MAIN THRUST"
516 PRINT "UNIT "
520 PRINT "YOUR MAX. BURN IS NOW";L;"FT/SEC."
525 RETURN
530 PRINT "YOUR THRUST UNITS HAVE FAILED "
531 PRINT "COMPLETELY "
535 LET L=0
540 RETURN

```

Program conversion

Paul Kaufman,
Ely, Cambridgeshire.

UK101

THIS SHORT BASIC routine enables a program resident in a Microtan system to be dumped to cassette in a format readable by the UK101 computer. To use the program, the following steps are performed: load into the Microtan the Basic program which you wish to convert. Reset from Basic and, using Tanbug's C, or copy command, move the previously-loaded program up about 4K in memory. First note where the program ended. All Basic programs will start from \$401.

Re-enter Basic making sure that you protect your relocated program by replying to the question "Memory Size?". Enter the program form the listing and type Run. Then enter, in decimal, the start address of the relocated program and start your cassette recorder. The program will be dumped to tape in a format readable by the UK101. If you have specified the start address correctly you will obtain the message "Error — program not here".

Although both the Microtan and UK101 use the same 300-baud CUTS tape standard, the way the data is stored on tape differs. The Microtan uses a condensed method where each of Basic's keywords — For, Next, GOSUB,

etc. — is assigned a single byte code or tag.

However, the UK101 uses a less efficient method in that the entire keyword, letter by letter is stored on tape. This makes loading and saving to tape a much lengthier process, without Microtan's advantage of a high-speed 2,400-baud alternative.

What this program does then is to scan the designated text for the tags, look up the equivalent keyword and store it to tape. If an equivalent is not found, the character is directly stored to tape. The program knows when it has reached the end when it finds three consecutive nulls which designate the end of a Basic program.

```

10 REM** MICROTAN TO UK101 TAPE FORMAT CONVERTER
11 REM** PAUL B KAUFMAN JAN/82
12 REM**
14 REM**
15 REM**
20 DIMA$(69):POKE14,1:T$="":REM SET "CUTS" SPEED
30 FORI=1TO 69:READA$(I):NEXT:REM GET TAGS
40 PRINTCHR$(12):INPUT"Enter start address":AD:REM DECIMAL ADDRESS
50 IFPEEK(AD)<>0THENPRINT"Error-program not here"FORI=1TO200:NEXT:RUN
55 REM BEGIN SCAN OF PROGRAM
60 IFPEEK(AD)+PEEK(AD+1)+PEEK(AD+2)=0THENPOKE22,254:PRINTT$:GOTO999
70 PRINTT$:POKE22,254:PRINTT$:T$="":AD=AD+3
71 NM=PEEK(AD)+256*PEEK(AD+1):T$=T$+STR$(NM)+" "
72 AD=AD+2
80 IFPEEK(AD)=0THEN60
90 IFPEEK(AD)>127THENT$=T$+A$(PEEK(AD)-127):GOTO200
100 T$=T$+CHR$(PEEK(AD))
200 AD=AD+1

```

(continued on next page)

SOFTWARE FILE

(continued from previous page)

```

210 GOTO80
999 PRINT$:PRINT:PRINT:PRINT:PRINT"  PROGRAM COMPLETED":END
1000 REM DATA TABLE USED TO CONVERT TAGS INTO FULL WORDS
2000 DATAEND,FOR,NEXT,DATA,INPUT,DIM,READ,LET,GOTO,RUN,IF,RESTORE,
      GOSUB
2010 DATARETURN,REM,STOP,ON,NULL,WAIT,LOAD,SAVE,DEF,POKE,PRINT,CONT,
      LIST
2020 DATACLEAR,GET,NEW,TAB(,TO,FN,SPC(,THEN,NOT,STEP,+,*,/,
      ,↑,AND,OR
2030 DATA>,<,<,SGN,INT,ABS,USR,FRE,POS,SQR,RND,LOG,EXP,COS,SIN,
      TAN,ATN,PEEK
2040 DATALEN,STR$,VAL,ASC,CHR$,LEFT$,RIGHT$,MID$,***
      OK

```

Brahma

Paul Blythe,
Sheffield,
South Yorkshire.

ZX-80

THIS LOGIC problem is based on the project

given by Brahma, the Hindu deity, to his disciples. The object of the game is to transfer a set of rings, of different sizes, from one pillar to another but at no time can a larger ring be on top of a smaller.

The program runs on a ZX-81 1K. However, typing errors or illegal moves when

playing the game stretch the memory to its limits. There are five rings; ring 1 is the smallest. If, however, you have additional memory, you can have more rings by using the alternative lines shown at the end of the program where N is the number of rings. The solution for five rings is given below.

```

BRAHMA
10 DIM A(3,5)
11 FOR B=1 TO 5
12 LET A(1,B)=B
13 NEXT B
14 GOTO 160
20 PRINT "FROM"
21 INPUT C
50 FOR B=1 TO 5
50 IF A(C,B)>0 THEN GOTO 80
70 NEXT B
75 GOTO 20
80 PRINT "TO"
81 INPUT D
82 IF C=D THEN GOTO 20
90 FOR E=1 TO 5
100 IF A(D,E)=0 THEN NEXT E
125 IF E=6 THEN GOTO 190
130 IF A(C,B)>A(D,E) THEN GOTO 20
140 LET A(D,E)=A(C,B)
150 CLS

```

```

155 LET A(C,B)=0
160 FOR F=1 TO 5
170 PRINT "  ";A(1,F);"  ";A(2,F);"  ";A(3,F)
180 GOTO 20
190 LET A(D,5)=A(C,B)
200 GOTO 150

```

```

10 DIM A (3,N)
11 FOR B = 1 TO N
50 FOR B = 1 TO N
90 FOR E = 1 TO N
125 IF E = N+1 THEN GOTO 190
160 FOR F = 1 TO N
190 LET A (D,N)= A(C,B)

```

SOLUTION

```

1-3, 1-2, 3-2, 1-3, 2-1, 2-3, 1-3, 1-2, 3-2, 3-1,
2-1, 3-2, 1-3, 1-2, 3-2, 1-3, 2-1, 2-3, 1-3, 2-1,
3-2, 3-1, 2-1, 2-3, 1-3, 1-2, 3-2, 1-3, 2-1, 2-3,
1-3

```

Alien arcade

Stuart Debuse,
Bognor Regis, Sussex.

VIC-20

THIS IS AN arcade game for one person,

involving avoiding randomly-generated asteroids, while at the same time scoring points for hitting the occasional alien.

Z moves the spaceship to the left, and M moves it to the right. 200 points are awarded for

hitting an alien; 50 points for hitting the side of the screen, and 100 points deducted for hitting an asteroid. The program takes full advantage of the Vic-20's colour and sound facilities.

```

1 PRINT"WHAT IS YOUR NAME?"
2 INPUT P$
3 PRINT"CLR"
4 PRINT"OFF YOU GO!";P$
5 FOR H=1TO1000:NEXT H
6 POKE 36879,8
7 H=0:S=0:Z=0
8 Q=50
9 A=7900:B=11:D=8164
20 FOR J=1TO24:PRINT:NEXT
25 FOR K=1TO600
30 POKE D+INT(32*RND(1)),46
35 R=INT(25*RND(1))
36 IF R=1 THEN 700
40 FOR J=1TO Q:NEXT
45 Q=Q-0.25
50 POKE A+B,32
55 PRINT
60 GET A$
70 IF A$="" THEN 100
71 IF B=1 AND A$="M" THEN H=H+1
72 IF B=21 AND A$="Z" THEN H=H+1
80 IF B>1 AND A$="Z" THEN B=B-1

```

```

90 IF B<21 AND A$="M" THEN B=B+1
100 POKE A+B,22
105 IF PEEK((A+B)+22)=46 THEN 114
106 IF PEEK((A+B)+22)=42 THEN 900
110 NEXT K
112 GOTO 300
114 POKE 36879,42
115 PRINT"CLR"
116 PRINT"(CTRL & WHT) DESTROYED BY ASTEROID!!"
200 POKE 36877,220
201 S=S+1
210 FOR L=15TO 0STEP-1
220 POKE 36878,L
230 FOR M=1TO100
240 NEXT M
250 NEXT L
260 POKE 36877,0
270 POKE 36878,0
275 POKE 36879,8
280 GOTO 30
300 PRINT "(CLR)":POKE 36879,106
310 FOR R=1TO5:PRINT:NEXT R
313 Z=(H*50)-(S*100)+(X*200)

```

(continued on page 79)

NEW GAMES

THE NAUGHTY ONE

An adventure for (very) broadminded people. Pay your way through gambling dens, bars and houses of vice, be secluded or seduced, earn a slave, acquire part of your opponents' bodies. Loose your money and borrow... (ha... there is no bank, only a pawnbroker, whose sole collateral will be some of your clothes) Gamble for the clothes of your opponents, force the pawnbroker to auction some clothes (preferably from other players...), be given some saucy tasks or dole some out. Build a massage parlour and bankrupt (or undress) your opponents, if they are unlucky...

A mini version of this game is now available on cassette. The maxi version on disk is much more expanded and contains in between other things 40 pubs and bars, 20 gambling houses, and also... ..no, we won't tell. Play it safe (for tokens) or play it hard. If you dare, that is...

A SPHINX COMPUTER GAME



THE SIGN OF HADRIN

Become familiar with dark age Britain and dig your way to a £1,000 treasure which is actually buried in this country. A game which will tax the highest intelligence and needs real application to find the solutions.

It also includes a lot of outside activities. Follow the trail of this dark age magician and discover his tomb, with the real treasure in it.

A SPHINX COMPUTER GAME



GOLD

Find your way to more than forty rooms, collect the treasures and try to get out with them. Very addictive. With the game come instructions on how to win a Memotech Memory Expansion. On the same tape: Pick a Word, a game of skill. Try and beat your children at it.


A HILDERBAY GAME



THE MAZE GAME

Go through three dimensional mazes which are unmapped and find your way about. The game cannot become boring because the mazes change all the time.

If you are a maze addict... A SPHINX COMPUTER GAME



GOLF

A step nearer to the real thing. Played on actually existing courses, with a full selection of clubs. Contains all the necessary like weather, wind, and other atmospheric circumstances. You control yourself whether you slice or hook and you also determine yourself the impact on the ball.

Available in March, with full colour graphics. A SPHINX COMPUTER GAME



THE SECRET CODES

Not a mastermind type of game at all. There are many coded texts on the disk (or cassette) which may be very difficult to decipher. We undertake to pay £100.00 to the sender of the first complete listing of all the texts, listing which must be faultless of course.

Sample?
HOGARIM MESHA STWAND TARAGHON MOTASHIN
SOMETIMES DRASHTIM MEGRAHON SHARDSOMSH
KRIDNAHAM

A SPHINX COMPUTER GAME



ORDER FORM

| GAME TITLE | cassette (16K) | | diskette (48K) | |
|--------------------------------|----------------|-------|----------------|----------|
| | ZX 81 | Atari | Atari | Apple II |
| THE NAUGHTY ONE (mini version) | 9.50 | 9.50 | | |
| THE NAUGHTY ONE (maxi version) | | | 24.50 | 24.50 |
| THE SIGN OF HADRIN | | | 29.50 | 29.50 |
| THE SECRET CODES | 8.50 | 8.50 | 12.00 | 12.00 |
| THE MAZE GAME | 8.50 | 8.50 | 12.00 | 12.00 |
| GOLD (A Hilderbay Game) | 8.00 | 8.00 | 12.00 | 12.00 |
| GOLF (available March) | | | 29.50 | 29.50 |

Circle items wanted.

Name

Address

Town Postal Code

Remittance enclosed

V.A.T. is included. Please add 50p for P&P if order less than £10.00.

Send to

HOLDCO LTD. 14 BRITTON STREET LONDON EC1M 5NQ

reprints

If you are interested in a particular article/special feature or advertisement in this journal

HAVE A GOOD LOOK AT OUR REPRINT SERVICE!

We offer an excellent, reasonably priced service working to your own specifications to produce a valuable and prestigious addition to your promotional material. (Minimum order 250 copies). Telephone Michael Rogers on 01-661 3036 or complete and return the form below.

To: Michael Rogers, Your Computer, Reprint Department, Quadrant House, Sutton, Surrey SM2 5AS.

I am interested in copies of article/advert. headed featured in this journal on pages, issue dated

Please send me full details of your reprint service by return of post.


Name

Company

Address

..... Tel. No

NEW CASIO FP-10 MINI PRINTER

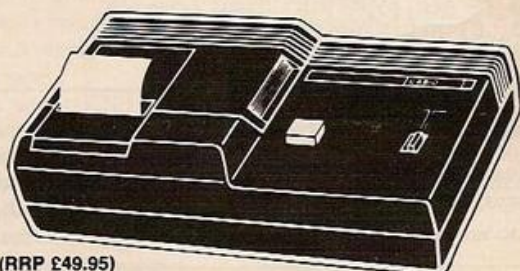

(RRP £49.95)

AN INCREDIBLE £44.95

Compatible with the FX-501P, FX-502P, FX-601P, FX-602P and FX-702P Manual and program results printout. Memory and program listing.

FP-10 electric discharge mini printer. A remarkably clear 5 x 7 dot matrix printout of 20 characters per line. Up to 30 characters store/printout over 1 1/2 lines, with overload symbol. Fast 2 lines/second print speed. Aluminium paper rolls are approx 2,500 lines/30 feet long. Connects directly to the calculator, or via FA-2 cassette interface. Four AA batteries will print approx 6,000-9,600 lines. Rechargeable pack NP-4M, 13,000 lines, (£6.90) AC adaptor AD-4150 will recharge NP-4M, in situ, (£5). Printer rolls £2.50 per pack of five. Dims: 43.5H x 157.5W x 82.5D (1 3/4" x 6 1/4" x 3 1/4") weight 372g (13.1oz)

FX-602P. 512 program steps. With FREE MICROL PPP (£9.95) £74.95
FX-702P. Basic pocket computer. 1680 to 80 program steps. 26 to 226 memories, all non-volatile. FREE MICROL PPP. £119.95
MICROL PROCOS. Professional Programming solutions on tape £24.95

DISCOUNTS ON SOFTWARE WHEN YOU BUY YOUR HARDWARE FROM US.

Catalogue of Casio calculators, keyboards and watches and further information on the 602P or 702P and PROCOS on request. (14p stamp).

Price includes VAT, P&P. Delivery normally by return. Send cheques, P.O. or phone your Access or Barclaycard number to:-

Dept PCW,
38 Burleigh Street,
Cambridge CB1 1DG.
Tel: 0223 312866.

TEMPUS

(continued from page 77)

```

314 PRINT "YOU SCORED",Z
315 PRINT "POINTS",P$
320 PRINT "WELL DONE",P$
330 PRINT "YOU ONLY HIT";S
335 PRINT "ASTEROIDS THIS TIME"
336 PRINT
337 PRINT "YOU SCORED"
338 PRINT
339 PRINT "HITS";P$
340 PRINT
345 PRINT "YOU HIT ";X;" ALIENS"
350 PRINT "DO YOU WANT ANOTHER GO?"
360 PRINT "Y OR N?"
370 INPUT W$
380 IF W$="Y" THEN 3
385 POKE 36879,44
386 PRINT "CLR"
387 FOR U=1 TO 11:PRINT:NEXT U
388 PRINT "(CTRL & YEL)O.K"
390 PRINT

```

```

395 PRINT "(CTRL & YEL)BYE FOR NOW";P$
400 END
700 FOR P=1 TO 10
710 POKE D+INT(32*RND(1)),42
720 FOR J=1 TO Q:NEXT J
730 POKE A+B,32
740 GOTO 55
900 POKE 36879,127
910 PRINT "CLR"
920 PRINT "(CTRL & BLK)GOOD HIT!"
930 POKE 36878,15
940 FOR L=1 TO 15
950 POKE 36876,160
960 FOR M=1 TO 10:NEXT M
970 POKE 36876,0
980 FOR M=1 TO 10:NEXT M
990 NEXT L
1000 POKE 36878,0
1010 X=X+1
1020 POKE 36879,8
1030 GOTO 30

```

Prime numbers

Jack Bettridge,
Wallington,
Surrey.

ZX-80

ANY PRIME NUMBER up to the arithmetical maximum of 32,767 can be identified with this program, which works fast if the computer is not asked to digest too many numbers at one time.

If there are hundreds of numbers between A and B, the screen will remain blank for some seconds and the Continue key may be subsequently needed to obtain additional pages.

Lines 90 to 140 are required just in case 1, 2, and 3 are included in the A to B range. Anyone willing to ignore the technicality that these first three numbers are primes can save six lines of program. It is obviously a waste of time counting any even number after 2, so lines 150 and 220 ensure only odd numbers are considered. Each odd number within the range is progressively divided and repeatedly tested for a remainder or zero by lines 180 to 210. Line 250 is necessary because the ZX-80 has no Step facility.

```

10 PRINT "PRIME NUMBERS FROM?"
20 INPUT A
30 PRINT "TO?"
40 INPUT B
50 CLS
60 PRINT "ALL PRIME NUMBERS BETWEEN" ;A
70 PRINT "AND ";B;" : "
80 PRINT
90 LET C=A
100 FOR Y=1 TO 3
110 IF NOT C=Y THEN GOTO 140
120 PRINT Y;" ";
130 LET C=C+1
140 NEXT Y
150 IF 2*(A/2)=A THEN LET A=A+1
160 FOR Y=A TO B
170 LET Q=3
180 LET R=Y/Q
190 LET P=Y-R*Q
200 IF P=0 THEN GOTO 250
210 IF Q>R THEN GOTO 240
220 LET Q=Q+2
230 GOTO 180
240 PRINT Y;" ";
250 LET Y=Y+1
260 NEXT Y

```

Faster slow mode

G W Hewitt,
Edinburgh.

ZX-81

IF, LIKE ME, you like to type in programs in slow mode, you will have found that it can be annoying when adding lines to a long program to have to wait while the computer writes the entire screen every time. It is especially bad if the line is a long Print or Rem line.

This small program can be temporarily stored near the start of the program using a few spare lines. When one has a screen full of lines, type Goto (first program line). Answer the prompt with the last line you have entered and it will return you to that line with an empty screen below. It also Pokes the listing-system variable to ensure that every relist after that will return to your chosen line.

(continued on next page)

```

2 CLS
3 PRINT "TYPE LINE NO"
4 INPUT XXX
5 POKE 16419, XXX - INT(XXX/256)*256
6 POKE 16420, INT (XXX/256)
7 LIST XXX
8 STOP

```


(continued from previous page)

Top drawer

A J Bissex,
Radstock,
Avon.

GENIE

THE PROGRAM is operated by means of five keys. The user can draw whatever he wants with this simple program for the Video Genie. The keys are as follows:

- 1: Left
- 2: Right
- 3: Down
- 4: Up
- 5: Clear the screen to start again

The drawing will start in the middle of the screen or at the points specified in line 20. You can alter these points as you wish. By adding a line 35, the user will be able to move the dot around the screen without leaving a trail. The line 35 would be as follows:

35 RESET (XX,YY)

```

10 CLS
20 XX=62:YY=24:SET (XX,YY)
30 A$ = INKEY$: IF A$ = "" THEN 30
40 IF A$ = "1" THEN 100
50 IF A$ = "2" THEN 110
60 IF A$ = "3" THEN 120
70 IF A$ = "4" THEN 130
80 IF A$ <> "0" THEN 30
90 CLS : GOTO 10
100 XX=XX+1
105 GOTO 140
110 XX=XX-1
115 GOTO 140
120 YY=YY+1
125 GOTO 140
130 YY=YY-1
140 IF XX<0 OR XX>127 OR YY<0 OR YY>47 THEN 30
150 GOTO 20
    
```

Biorhythms

Michael Sørensen,
Hvidovre,
Denmark.

ZX-81

YOUR BIORHYTHM tells you how you should feel. It is the average of the physical, the psyche and the intellectual rhythms. This program tells you the values of the three rhythms and their average on a certain day,

and then goes on to print the biorhythm curve for the next 30 days.

The many Rem statements make the program self-explanatory. The three rhythms are calculated as soon as you have entered your date of birth. You can omit the spaces in the program if you like — and the Rem statements, too. The program fills about 4.5K but it can be reduced to less than 3K by these omissions.



```

10 REM *****
20 REM *
30 REM * BIORHYTHM PROGRAM *
40 REM * A PROGRAM BY: *
50 REM * MICHAEL SØRENSEN *
60 REM * FOR ZX-81 WITH 16K *
70 REM *
80 REM *****
90 REM INPUT
100 PRINT AT 0,0;"BIORHYTHM FOR"
110 PRINT AT 20,0;"WRITE THE NAME"
120 PRINT AT 21,0;"AND PRESS *NEWLINE*"
130 INPUT A$
140 PRINT AT 0,13;A$
150 PRINT AT 1,0;"BORN THE"
160 PRINT AT 20,10;"BIRTHDAY"
170 INPUT FD
180 PRINT AT 1,9+(FD<10);FD;"-"
190 PRINT AT 20,10;"MONTH OF BIRTH"
200 INPUT FM
210 PRINT AT 1,12+(FM<10);FM;"-"
220 PRINT AT 20,10;"YEAR OF BIRTH"
230 INPUT FY
240 PRINT AT 1,15;FY
250 PRINT AT 2,0;"B-DAY THE"
260 PRINT AT 20,10;"BIORHYTHM DAY"
270 INPUT BD
280 PRINT AT 2,9+(BD<10);BD;"-"
290 PRINT AT 20,19;"MONTH"
300 INPUT BM
310 PRINT AT 2,12+(BM<10);BM;"-"
320 PRINT AT 20,19;"YEAR"
330 INPUT BY
340 PRINT AT 2,15;BY
350 REM PRINT 23 SPACES
360 PRINT AT 20,0;
370 "
380 "
390 "
400 LET S=0
410 REM CALCULATE THE NUMBER OF DAYS IN THE REST OF THE YEAR
420 LET D=FD
430 LET M=FM
440 LET Y=FY
450 GOSUB 2000
460 LET AD=-X
470 REM CALCULATE THE NUMBER OF INTERCALARY DAYS
480 FOR Z=FY TO BY
490 IF Z/4-INT(Z/4)=0 AND Z/100-INT(Z/100)>0 AND FY <> BY
500 THEN LET S=S+1
510 NEXT Z
520 REM CALCULATE THE NUMBER OF DAYS FROM THE BIRTH TO THE
530 BIORHYTHM YEAR STARTS
540 LET AD=AD+S+365*(BY-FY)
550 REM CALCULATE THE NUMBER OF DAYS IN THE BIORHYTHM YEAR
560 LET D=BD
570 LET M=BM
580 LET Y=BY
590
600
610
620
630
640
650
660
670
680
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850
860
870
880
890
900
910
920
930
940
950
960
970
980
990
    
```


SOFTWARE FILE

Double height

Brian Syme,
Strom,
Whiteness,
Shetland.

ZX-81

THIS PROGRAM has been written to run on the ZX-81 with 16K and printer produces a double-height character set on the printer. RAMtop must be set to 30720 by

POKE 16389,120. NEW

The program works by creating two new character sets, one for the upper half of each character and one for the lower. When printing a line, text is Poked into the printer buffer and then printed using the modified ROM routine.

Before loading, execute the following commands:

POKE 16389,120

POKE 16388,0
NEW

To print a line, use the routine at line 9200, for example:

```
10 LET P$="TEXT TO BE PRINTED"  
20 GOSUB 9200
```

Lines 10 to 65 of the main program load the new character set; lines 9000 to 9120 are the copy routine and lines 9200 to 9310 contain the LPrint routine.

```
10 REM (C) 1982 BRIAN SYME  
11 DIM E$(32)  
12 LET M=PEEK 16389*256  
15 FOR X=0 TO 63  
17 REM THIS SECTION LOADS THE NEW CHARACTER SET ABOVE RAMTOP  
20 FOR C=0 TO 3  
22 POKE 2*C+X*8+M,PEEK (7680+X*8+C)  
24 POKE 1+2*C+X*8+M,PEEK (7680+X*8+C)  
26 POKE 512+2*C+X*8+M,PEEK (7680+X*8+C+4)  
28 POKE 513+C*2+X*8+M,PEEK (7680+X*8+C+4)  
30 NEXT C  
40 NEXT X  
50 FOR I=0 TO 112  
55 POKE 31744+I,PEEK (2161+I)  
60 NEXT I  
65 POKE 31857,201  
9000 REM DOUBLE HEIGHT SCREEN COPY  
9020 LET UF=PEEK 16396+PEEK 16397*256  
9030 FOR U=0 TO 21  
9040 FOR O=1 TO 32  
9050 POKE 16443+O,PEEK (UF+U*33+O)  
9060 NEXT O  
9070 POKE 31800,PEEK 16389/2
```

```
9080 LET UZ=USR 31744  
9090 POKE 31800,PEEK 31800+1  
9100 LET UZ=USR 31744  
9110 NEXT U  
9120 RETURN  
9200 REM DOUBLE HEIGHT PRINT ROUTINE  
9210 LET Z=INT((LEN P$-1)/32)*32  
9220 LET P#=P$+E$( TO 32-(LEN P$-Z))  
9230 FOR X=0 TO INT (LEN P$/32)-1  
9240 FOR Y=1 TO 32  
9250 POKE 16443+Y,CODE P$(Y+X*32)  
9255 NEXT Y  
9260 POKE 31800, PEEK 16389/2  
9270 LET XX=USR 31744  
9280 POKE 31800,PEEK 31800+1  
9290 LET XX=USR 31744  
9300 NEXT X  
9305 LET P$=""  
9310 RETURN
```

To copy the screen use

GOSUB 9000

Satellite plot

B T Jeeves,
Sheffield,
South Yorkshire.

ZX-81


I WROTE THIS program to determine satellite parameters. When run, the program requests you to select which input your require, height or velocity. This is followed by a request for the particular figures in miles, or miles per

second. The program then prints out the satellite data including the orbital period. Not earth-shaking, but a change from the well-known "Invaders From Galactic Space Laser Blasters" genre.

```
5 REM "SATELLITES BY TERRY JEEVES"  
10 PRINT "TO DETERMINE SATELLITE VELOCITY, HEIGHT  
AND PERIOD IN A CIRCULAR ORBIT"  
15 PRINT  
20 PRINT  
25 PRINT "TO SOLVE ORBITAL ELEMENTS, CHOOSE  
1 OR 2 AND N/L"  
30 PRINT  
35 PRINT "FOR A GIVEN HEIGHT.....1"  
40 PRINT "FOR A GIVEN VELOCITY.....2"  
45 INPUT A  
50 IF A=1 THEN GOTO 70  
55 IF A=2 THEN GOTO 100  
60 IF A<>1 OR A<>2 THEN CLS  
65 IF A<>1 OR A<>2 THEN GOTO 10  
70 CLS  
75 PRINT "INPUT HEIGHT IN MILES"  
80 INPUT H  
85 LET V=(INT((SQR((144*10**10)/(3960+H)))*36))/100  
90 PRINT "ORBITAL VELOCITY AT ";H;" MILES IS ";V;" MILES/SEC"  
95 GOTO 125  
100 CLS  
105 PRINT "INPUT VELOCITY IN MILES/SEC"  
110 INPUT V  
115 LET H=(INT(100*((144*10**10)/((3600*V)**2)-3960)))/100  
120 PRINT "AT A VELOCITY OF ";V;" MILES/SEC, ORBITAL HEIGHT WILL BE  
";H;" MILES"  
125 PRINT  
130 PRINT  
135 LET P=(INT(100*(2*PI(3960+H)/(60*V))))/100  
140 PRINT "ORBITAL PERIOD WILL BE ";P;" MINUTES"
```


This memory is made for your Atom

OR OTHER 1MHz 6502/6800/6809 SYSTEM

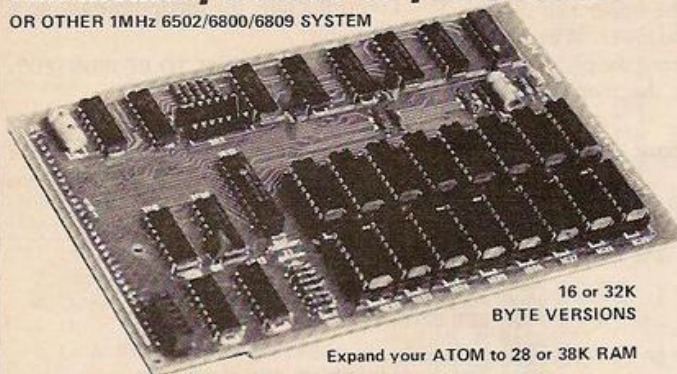

16 or 32K
BYTE VERSIONS

Expand your ATOM to 28 or 38K RAM

Ideal for Word Processing, Chess programs and Business Software.

Fully Compatible with other Acorn ATOM software and hardware

Versions available to fit inside the ATOM while still leaving room for other extensions such as the Acorn ATOM colour encoder board. Eurocard rack mounting types also available

PRICES: INCLUDING U.K. P&P & 15% VAT

| | |
|---|--------|
| MZ163A 16K Built & tested to fit inside ATOM'S case | £59.50 |
| MZ163B 32K " " " " | £74.00 |
| MZ163C 16K Built & tested, Eurocard rack mounting | £62.00 |
| MZ163D 32K " " " " | £76.50 |
| MZ163E Bare PCB to build any of above with data | £23.00 |
| MP100 DC/DC converter; powers any MZ163 board from unregulated 8V supply such as the ATOM mains adaptor | £8.50 |

S.A.E. for further details.



VISA

ALL PRICES INCLUDE U.K. P&P
+15% VAT WHERE APPLICABLE.
PAYMENT WITH ORDER PLEASE.

TIMEDATA LTD 57 Swallowdale, Basildon,
Essex. SS16 5JG Tel: (0268) 411125 (MON-FRI)

Books and bits for ZX, Atom

The Explorer's Guide to the ZX81

IF YOU'VE GOT A ZX81 THEN YOU NEED THIS BOOK!

Programs for 1K RAM, and programs for 16K RAM.
Games, Business and Engineering Applications.
RAM & I/O Circuits. Useful ROM Routines. Hints
and Tips. And Much Much More, for only

NEW!

£4.95

The ZX80 Magic Book

With 8K ROM/ZX81 Supplement

Games programs, computer music, converting programs
written in other BASICS, improving the picture
RAM & I/O circuits, and much more.

£4.75

Getting Acquainted with your ZX81

75 + programs including Draughts; by Tim Hartnell

£4.95

Mastering Machine Code on your ZX81

180 pages of immense value to beginner and expert alike.

£5.95

The Atom Magic Book

A wealth of games and other programs: storing speech in your ATOM,
converting programs written in other BASICS tape recording hints,
and many more useful hardware tips.

£5.50

Getting Acquainted with your Acorn Atom

By Tim Hartnell and Trevor Sharples. 80 programs including
Draughts!

£7.95

ZX & Atom IC's & Connectors

S.a.e. for list.

TIMEDATA

PUT YOUR MICRO TO WORK!



YOUR
MACHINE

CONTROL MACHINES, ROBOTS, FACTORY OR HOME

Have you ever wanted your MICRO to control a machine for you, or manage your house? If so, the MDR 'MICROCOMPUTER CONTROL INTERFACE' will give you isolated channels of OUTPUT (8A @ 250 volts) and switch sensing INPUTS.


Available now for connection to PET USER, PORT, RS232 and IEEE488, allowing expansion up to more than 900 channels.

Supplied complete with connecting cables, full data and guarantee from £12.54 per channel. Complete preprogrammed systems or individual components available. Write or phone for details.

M D R (INTERFACES) LTD.

Little Bridge House, Dane Hill,
Nr. Haywards Heath, Sussex RH17 7JD.
Telephone: 0825-790294.

VIC-20 VolksComputer. With colour and sound.

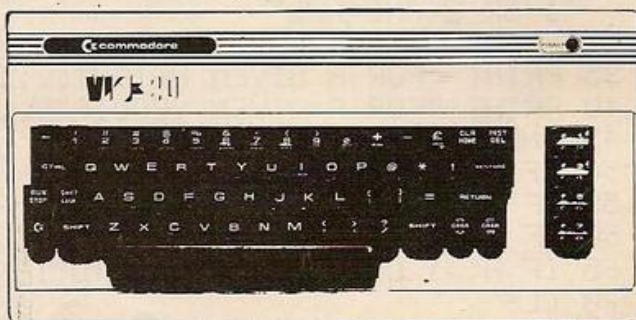

£189.95 including vat

**TWICKENHAM
COMPUTER
CENTRE LTD**
01-892 7896
01-891 1612

VISA

I WISH TO PAY
BY BARCLAYCARD TRUSTCARD
PLEASE CHARGE TO MY ACCOUNT

SIGNATURE

NAME

ADDRESS

72 Heath Road Twickenham Middlesex

COMPETITION CORNER

Klingon death

BY ANTHONY ROBERTS


THE KLINGONS' treasure is contained in a hollowed asteroid bristling with automatic defence mechanisms. One button on this control panel will defuse them all — it is your problem to find which. The other buttons will self-destruct, so a mistake will be fatal.

By a massive computer search through the Klingon central systems, find the key: each button has four symbols and it is possible to press every button but one in a closed-loop sequence in which each button is identical in all but one symbol with the previous button pressed, and in which no button is pressed twice until the first button is reached again.

The one button not in the sequence is the defuse button. What does it look like?

A £15 book token will be awarded to the first correct solution drawn from the competition bag. All entries must be at the *Your Computer* offices by the last working day in April. The name of the winner, the solution, and a competition report will be published in the June issue of *Your Computer*.

If you want to set a competition for Competition Corner, remember that the simplest solution should be calculable by a short program rather than by any other form of reckoning.

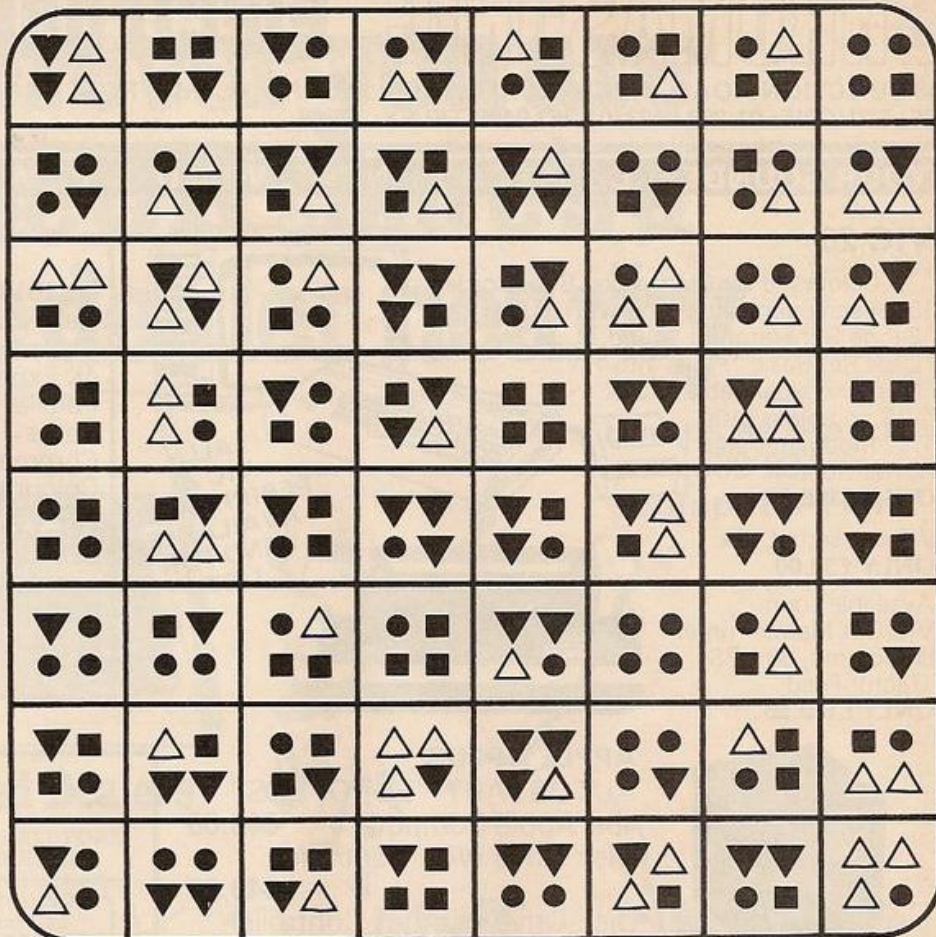

Competition results

THERE WERE more than 500 entries for the BBC Micro crossword competition in February. Most found the correct solution

without too much difficulty and suggested a plethora of alternative names for the BBC Microcomputer. After much deliberation, we declared J Parkinson of 16 Newquay Avenue, Reddish, Stockport, Cheshire, SK5 7BQ, as the winner. A BBC Micro is on its way.

His suggestion for a better name for the BBC Micro was "Zaphod — a beeb-box with

two brains". Any who does not understand the significance of that sentence is advised to read Douglas Adams' *Hitch-hiker's Guide to the Galaxy*.

Geoff Kayum of Guildford, gave vent to his feelings with "Nessy II — Everyone's seen a photo, but does it exist?" while Steve Saddington of Havant, Hampshire, took a leaf out of a popular TV series with his "Basil — B-cos sum ULA chips R Fawltly".


The Troll Plague competition published in February also drew a large response with entries coming from as far afield as Norway, Denmark and Greece. The solution, as most of you discovered, was 17 copper coins. A variety of programs were sent in, including a mammoth one from J Blackman of Norbury, London. The winning solution was provided by K Moseley of 30 The Uplands, Harpenden, Hertfordshire, AL5 2NZ.

The February crossword solution.

K Moseley's Troll Plague solution.

```

10 I=1
20 C=I:K=1:B=0
30 L=C:C=C+B:B=B+L
40 IF B+C<3 THEN GOTO 160
50 B=B-2
60 IF B>1 THEN GOTO 50
70 IF B=0 AND K<5 THEN GOTO 160
80 IF K<75 THEN GOTO 100
90 IF C<=2 THEN PRINT I:END
95 GOTO 160
100 K=K+1:IF K=6 THEN GOTO 160
110 C=C+B:B=0
120 B=B+1
130 C=C-2
140 IF C<1 THEN GOTO 30
150 GOTO 120
160 I=I+1:GOTO 10
    
```

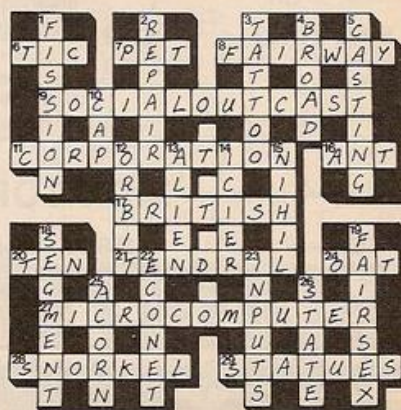

CHROMASONIC electronics

48 JUNCTION ROAD, ARCHWAY LONDON N19 5RD 100 yds FROM ARCHWAY STATION & 9 BUS ROUTES
TELEPHONE: 01-263 9493/01-263 9495 TELEX: 22568.


YOUR SOUNDEST CONNECTION IN THE WORLD OF COMPUTERS

VIC 20

- * 24 Colours, 8 for Characters, 8 for Border, 16 for screen mixed as you wish.
 - * 3 tone Generator for sound.
 - * Uses Pet Basic *Plugs into T.V.
 - * Memory expandable to 32K
 - * VIC complete with T.V. Modulator and Power Supply
- ONLY £165.00**

VIC Cassette Deck
ONLY £38.00

Available soon
VIC Dot Matrix Printer
80 Column, 30 CPS,
Tractor Feed
ONLY £199.95

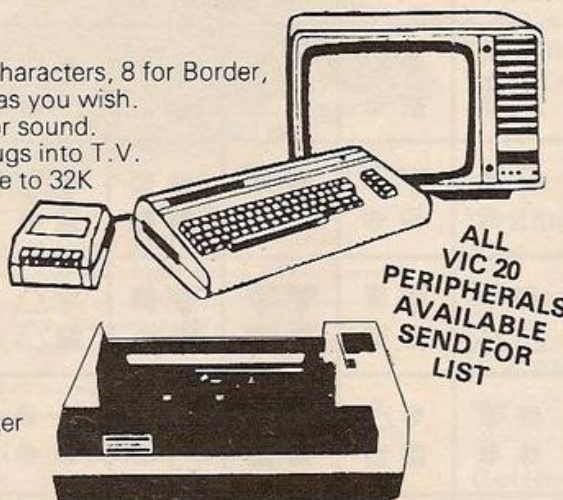

ALL
VIC 20
PERIPHERALS
AVAILABLE
SEND FOR
LIST

UK101

DOWN
IN PRICE

- UK101 Kit inc 8K memory **£125**
- Ready Built inc 8K memory **£175**
- Complete in case **£199**
- 4K Expansion 8x2114 **£10**
- Parallel Printer Interface **£24.50**
- Cases **£19.95**
- Chromasonics Sound Kit **£24.50**
- Colour Kit **£69.95**
- NEW** 32K Dynamic Memory Board only **£89.95**
- NEW** P.I.O. and Eprom Programmer Kit only **£24.50**

APPLE II PLUS

- AUTOSTART "EUROPLUS"
- 48K Apple Computer **£649.00**
- Disc Drive with Controller **£349.00**
- Disc Drive without Controller **£299.00**
- Colour Card **£69.00**
- Silentye Printer **£199.00**
- Graphics Tablet **£425.00**
- TV Modulator **£14.00**

A range of Apple
Accessories and
Software are
available



PET

- 4016 16K RAM **£445.00**
- 4032 32K RAM **£569.00**
- 8032 32K RAM **£755.00**
- 8096 96K RAM **£960.00**
- 4040 Disk Drive **£585.00**
- 8050 Disk Drive **£755.00**
- 4022 Printer 80 Col **£357.00**
- 8024 Printer 132 Col **£975.00**
- 8026 Printer/Typewriter **£835.00**
- 8027 Daisy Wheel **£735.00**

A range of Pet
Accessories and
Software are available



PRINTERS

INTERFACES AND CABLES
FOR APPLE II, PET, TRS80,
RS232, UK101, SHARP
SUPERBOARD - ALL
AVAILABLE.

EPSON MX80 £359
Dot-matrix printer with Pet
graphics interface. Centronics
parallel and serial. Pet and
Apple compatible. True bidirectional,
80 cps.

EP80 MX82 £389
As MX80 plus high Resolution
Graphics

EPSON MX80 FT/1 £399
Dual single sheet friction and
tractor feed, 9 wire head, true
descenders.

EPSON-MX80 FT/2 £440
An FT/1 with high resolution
graphics.

SEIKOSHA GP80A £199
Dot matrix 5 x 7, 80 columns, 30
cps graphics, double width
characters.

JUST PHONE FOR FURTHER DETAILS



VIDEO GENIE

£299 EG3003

Utilises Z80, 12K level II Basic, In-
tegral Cassette Deck, UHF O/P, 16K
RAM, all TRS80 features. Simply
plugs into monitor or UHF TV. With
V.U. Meter.

- PARALLEL PRINTER INTERFACE INC CABLE **£38.00**
- CHROMASONICS PROGRAMMABLE SOUND KIT **£24.50**
- SOUND KIT (FITTING EXTRA) **£8.20**
- LOWER CASE KIT (FITTING EXTRA) **£29.80**
- COLOUR KIT (FITTING EXTRA) **£36.00**
- EXPANSION BOX INC 16K RAM **£199**
- 16K/32K RAM BOARD **£94/ £129**
- NEW GENIE II NOW AVAILABLE £310**



MONITORS

- 9" Green Screen **£99.00**
- 12" Green Screen **£125.00**
- 12" BMC Green Screen **£159.00**
- HITACHI PROFESSIONAL 9" **£99.95**
- 12" **£149.00**

TANTEL

PRESTEL BY TANTEL
COMMUNICATIONS AT YOUR FINGERTIPS
FOR BUSINESS & HOME. UP TO DATE INFO

180,000 pages of information on Travel, News,
Investment, Holidays, Hotels Etc., Etc.

£159

TANTEL IS POST OFFICE APPROVED. SEND FOR DETAILS.
DEMONSTRATION AVAILABLE AT OUR SHOWROOM.


ALL ITEMS CARRY A ONE YEAR GUARANTEE



Please add VAT 15% to all prices. Postage on computers, printers and cassette decks charged at cost, all other items P&P 30. Place your order using your Access or Barclaycard (Min. tel. order £10). Export enquiries welcome. Official orders welcome.



Wherever you are in the UK there's a Genie dealer nearby

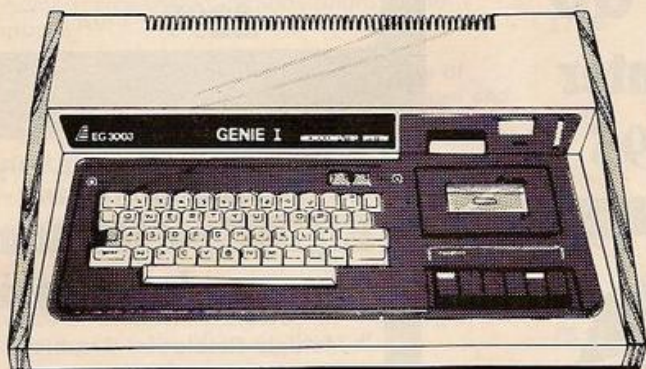

See us at Stands
336-237
Computer Fair

Genie I & II Approved Dealers

AVON Microstyle, Bath, 0225 334659/319705. **BEDFORD** Comserve, Bedford, 0234 216749. **BERKSHIRE** P.C.P., Reading, 0734 589249. **BIRMINGHAM** Ward Electronics, Birmingham, 021 554 0708. Consultant Electronics, Birmingham, 021 382 7247. A. E. Chapman and Co., Cradeley Heath, 0384 66497/8. **BUCKINGHAMSHIRE** Photo Acoustics, Newport Pagnell, 0908 610625. **CAMBRIDGESHIRE** Cambridge Micro Computers, Cambridge, 0223 314666. **CHESHIRE** Hewart Electronics, Macclesfield, 0625 22030. Mid Shires Computer Centre, Crewe, 0270 211086. **CUMBRIA** Kendal Computer Centre, Kendal, 0539 22559. **DORSET** Blandford Computers, Blandford Forum, 0258 53737. Parkstone Electronics, Poole, 0202 746555. **ESSEX** Emprise, Colchester, 0206 865926. **GLOUCESTERSHIRE** Computer Shack, Cheltenham, 0242 584343. **HERTFORDSHIRE** Photo Acoustics, Watford, 0923 40698. Q Tek Systems, Stevenage, 0438 65385. Chrisalid Systems and Software, Berkhamstead, 044 27 74569. **KENT** Swanley Electronics, Swanley, 0322 64851. **LANCASHIRE** Harden Microsystems, Blackpool, 0253 27590. Sound Service, Burnley, 0282 38481. Computercat, Leigh, 0942 605730. **LEICESTERSHIRE** Kram Electronics, Leicester, 0533 27556. **LONDON** City Microsystems, EC2, 01 588 7272/4. Wason Microchip, N18, 01 807 1757/2230. Premier Publications, Anerley SE20, 01 659 7131. **NORTH EAST** Briers Computer Services, Middlesbrough, 0642 242017. General Northern Microcomputers, Hartelepoo, 0783 863871. HCCS Associates, Gateshead, 0632 821924. **NOTTINGHAMSHIRE** Midland Microcomputers, Nottingham, 0602 298281. Mansfield Computers, Mansfield, 0623 31202. East Midland Computer Services, Arnold, 0602 267079. Electronic Servicing Co., Lenton, 0602 783938. **NORFOLK** Anglia Computer Centre, Norwich, 0603 29652. Bennetts, Dereham, 0362 2488/9. **OXFORDSHIRE** Micro Business Systems, Whitney, 0993 73145. **SCOTLAND** Computer and Chips, St Andrews, 0334 72569. Scotbyte Computers, Edinburgh, 031 343 1005. Victor Morris and Co., Glasgow, 041 221 8958. **SHROPSHIRE** Tarrant Electronics, Newport, 0952 814275. **SOUTH WEST** Diskwise, Plymouth (0752) 267000. West Devon Electronics, Yelverton, 082 285 3434. Bits and Bytes, Barnstaple, 0271 72789. **SUFFOLK** Elgelec Ltd., Ipswich, 0473 711164. **SURREY** Croydon Computer Centre, Thornton Heath, 01 689 1280. **WALES** Tryfan Computers, Bangor, 0248 52042. **WEST MIDLANDS** Allen TV Services, Stoke on Trent, 0782 616929. **WILTSHIRE** Everyman Computers, Westbury, 0373 823764. **YORKSHIRE** Advance TV Services, Bradford, 0274 585333. Huddersfield Computer Centre, Huddersfield, 0484 20774. Comprite, Bradford, 0274 668890. Superior Systems Ltd., Sheffield, 0742 755005. Photo Electronics, Sheffield, 0742 53865. **NORTHERN IRELAND** Business Electronic Equipment, Belfast, 0232 46161. Brittain Laboratories, Belfast, 0232 28374.



Sole Importers:

LOWE electronics

Chesterfield Road, Matlock, Derbyshire DE4 5LE.
Telephone: 0629 4995. Telex: 377482 Lowlec G.

INGENIOUS Genie I

All the features of the EG3003 system plus: * Machine Language Monitor
* Fitted Sound * Renumbr Command
* Full Lower Case * Screen Print



16K

£295 + VAT

Acorn Atom

Special features include

- * FULL SIZED KEYBOARD
- * ASSEMBLER AND BASIC
- * HIGH RESOLUTION COLOUR GRAPHICS



from:

£120

+ VAT

TANTEL 'PRESTEL' adaptor

Converts any black and white or colour T.V. for 'PRESTEL' reception.

£170 + VAT

Printers


EPSON MX80
EPSON MX100
ANADEx
PAPER TIGER
T.E.C.
SCRIPTA
MICROLINE 80

The most compact 80 column impact graphic-dot printer available

at a very compact price

seikosha GP80 printer

£195 + VAT

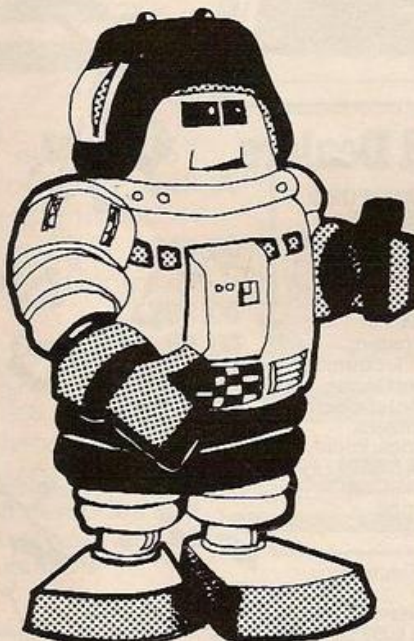

EG3014

Special adaptor to allow connection of TRS 80 to GENIE peripherals

EG3023

GENIE low cost 16K expander

Genie II

The MacroComputer


Offering all the advantages of the Genie I system, with the benefit of advanced design for the professional user.

- * 4 Defineable Function Keys
- * Full Upper & Lower Case
- * Terminal Routines
- * Facility to upload & Download
- * Screen Print
- * Includes T.V. Modulator

£299 + VAT

The Second Generation Personal Computer Highest performance lowest price

- * 48K
- * 16 Colours
- * Multiple Resolution Graphics
- * Split screen modes



DAI

£595

+ VAT

FOR

PAPER

DISK-
ETTES

BITS

RIBBONS
for most
printers
LABELS

BOOKS

SOFT-
WARE

LATEST
SECOND
- HAND
PRICES
Ring: 0225-
334659

MONITORS

all this and
much much
more

MicroStyle

29 Belvedere, Lansdown Road, Bath.
Telephone: (0225) 334659.



ZX81 SOFTWARE FROM VIDEO SOFTWARE LTD 1K & 16K

16K SOFTWARE

PRICE

£

VIDEO-SKETCH (ZX81 only). Move the cursor to any part of the screen. Draw or rub-out as you move it. Mix in text or graphics. Save picture in memory. Save picture sequence on cassette.

7.95

VIDEO-PLAN (ZX81 only). Performs the function of an analysis book. Arithmetic functions include addition, subtraction, multiplication. Printer options.

£7.95

VIDEO-AD. Rotating display of 16 pages of advertising material. Set-up your own pages and change them as and when required.

£7.95

VIDEO-GRAPH. Planning and design aid. Create pictures/charts/graphs and store within the program. Save on cassette. Combine pictures like an 'identikit'.

£5.95

VIDEO-VIEW. Do it yourself teletext. Create pages of data. Store them within the program. Save on cassette. View on demand.

£5.95

VIDEO-MAP (ZX81 only). Educational game based on maps. Navigate your plane to its destination. Bomb the target and return to base.

£5.95

FORCE-FIELD (ZX81 only). Animated bombardment game. You control the force-field which protects your city against hostile UFOs.

£3.95

SPACE-RACE (ZX81 only). Party game for eight players. Rockets race to build stations in space. Winners gradually take over losers until only one winner remains.

£3.95

TEST-MATCH. Realistic simulation of a test match series. Dynamic scoreboard. Give each player your own ratings for skill, technique, etc.

£3.95

FOOTBALL-LEAGUE. Realistic simulation of an entire season. Every match played and results shown with progressive league table. You give teams ratings for skill, effort, etc.

£3.95

STOCK-MARKET (ZX81 only). An exciting game of skill and judgement. Buy and sell stocks and shares as prices change in response to world events.

£3.95

PACK 1 — VIDEO-PLAN + VIDEO-AD 17.95
PACK 2 — VIDEO-VIEW + VIDEO-GRAPH 13.95
GAMESET — VIDEO-MAP + 5 GAMES 19.95

1K PARTY TRICKS (ZX81 ONLY)

If you don't have a 16K RAM this set of programs is for you. Ten separate programs — some games, some more serious. All completely original, all ten programs included in the price.

4.95

WHAT DO YOU RECEIVE

1. Instruction manual.
2. Two copies of program on side A.
3. Audio commentary on side B. (16K only).
4. Built in demonstration. (16K only).

Cash with orders please.

Prices include VAT.

Mail order customers add £1.00 per order.

Allow 28 days for delivery.

NEW VIDEO-INDEX NEW

- Q. How do you store 57000 characters in a 16K RAM.
A. Use VIDEO-INDEX.

Catalogue your cassettes, your record collection, references to magazine articles. Amazingly versatile. Capacity for 1000 individual references each of which can generate 57 characters of text. Powerful search facilities once the index has been created.

How is it done? The system cannot really fit 57000 characters in a 16K RAM. It gives the illusion of doing so by eliminating duplicates. For instance in an index of articles in computer magazines about the ZX81 certain words occur time and again. VIDEO-INDEX detects these duplications and thereby conserves space.

What do you get?

1. A machine code master program which sits at the top of RAM. This is initially loaded like a BASIC program.
2. A demonstration index containing 1000 references to articles about the ZX81 in the popular magazines.
3. A detailed instruction manual.

You may then proceed to create your own catalogues and indexes and save them on cassette.

This program is fast, efficient and ingenious and is by far the best product we have introduced for the ZX81.

N.B. There isn't room for a commentary on this cassette so you'll have to read the manual.

ZX81 or ZX80 + 8K ROM.

ZX printer is useful but not essential.

Price £9.95.

New Packaging.

We have discontinued our de-luxe boxed programs except for PACK 1, PACK 2 and GAMESET. All programs are now supplied in resealable "minigrip" plastic wallets.

SUPPORTED SOFTWARE

A new catalogue of software produced by named authors is in course of preparation. Watch this space.



STONE LANE,
KINVER,
STOURBRIDGE,
WEST MIDLANDS,
DY7 6EX,
ENGLAND.

Tel: KINVER 2462.
Std. 058-483-2462.

VIDEO
SOFTWARE LIMITED

Directors: P. Smith, B.A., D.J. Smith (Director and Secretary).

Registered Number: 1085129 England.

V.A.T. Reg. No. 278 0605 51

Personal callers welcome during office hours.
Send s.a.e. for further details.

AT LAST!

THE COMPLETE SINCLAIR ZX81 BASIC COURSE

At last, a comprehensive text for your Sinclair ZX81! The complete BASIC Course is a manual which will immediately become an indispensable work of reference for all your ZX81 programming.

Whether you have never done any programming or whether you are an experienced microcomputer user, the Complete BASIC Course will provide itself to you as an invaluable aid.

The Complete BASIC Course is designed to teach you to write and develop BASIC programs for the Sinclair ZX81 – no other books or aids are necessary. All is revealed in our easy step-by-step guide with programs and "test yourself" exercises all the way through.

As you become more proficient with computing, the Complete BASIC Course will continue to be an essential guide, giving you finger tip references, numerous advanced programming techniques and memory saving devices specifically for the Sinclair ZX81.

HOW TO WRITE PROGRAMS:

Even if the idea of writing programs is completely mystifying to you, the Complete BASIC Course will show you just how easy it is. In no time you will be able to write and enjoy complex programs for whatever use you desire.

Using the proven "TOP-DOWN" approach, the Complete BASIC Course will show you systematic and simple ways to write programs. Even experienced programmers will benefit from this Course, making programs easier to write and less prone to error!

NUMEROUS EXAMPLES:

Every concept, every function is fully described by simple programs that you can enter on your Sinclair ZX81 in minutes.

The Complete BASIC Course contains over 100 programs and examples! These programs illustrate the use and possibilities of the Sinclair ZX81:

- Home use
- Financial analysis and planning
- Educational applications
- Games
- Mathematical applications
- Displays of 'Artificial Intelligence'

EVERY FUNCTION COVERED:

No matter what your application, what your confusion about any function, you will find it covered in the Complete BASIC Course.

A full and detailed discussion is included of even traditionally taboo topics such as USR, PEEK and POKE.

A handy alphabetical summary section lists all functions, and provides a short description and example programs of all topics.

A PERMANENT WORK OF REFERENCE:

The Complete BASIC Course is an excellent reference work for experienced programmers (including tips on using special techniques) as well as a comprehensive step-by-step guide for complete beginners.

The Complete BASIC Course has over 240 pages filled with information in an attractive durable ring binder – this is a lay-flat work of reference that deserves a place next to every Sinclair ZX81 microcomputer.

OTHER TITLES AVAILABLE:

Melbourne House is the world's leading publisher of books and software for the Sinclair ZX81.

The following titles are also available if you wish to expand your horizons:

BASIC Course Programs on Cassette -

All major programs in the BASIC Course are available pre-recorded in this set of cassettes. This is a valuable adjunct to the Course, saving you time and effort.

Not Only 30 Programs for the Sinclair ZX81: 1K -

Not only over 30 programs, from arcade games to the final challenging Draughts playing program, which all fit into the unexpanded 1K Sinclair ZX81 but also notes on how these programs were written and special tips! Great value!

Machine Language Programming Made Simple for the Sinclair -

A complete beginner's guide to the computer's own language – Z80 machine language. Machine language programs enable you to save on memory and typically give you programs that run 10-30 times faster than BASIC programs.

Understanding Your ZX81 ROM -

A brilliant guide for more experienced programmers by Dr. Ian Logan, this book illustrates the Sinclair's own operating system and how you can use it. Includes special section on how to use machine code routines in your BASIC programs.



Order Form:

Orders to Melbourne House Publishers
131 Trafalgar Road, Greenwich London SE10

(Correspondence to
Glebe Cottage, Station Road, Cheddington, Leighton
Buzzard, BEDS LU7 7NA)

NAME:


ADDRESS:

.....Postcode.....

| | |
|--|----------|
| The Complete Sinclair ZX81 BASIC Course | @ £17.50 |
| Basic Course Programs on Cassette | @ £ 2.50 |
| Not Only 30 Programs/Sinclair ZX81:1K | @ £ 6.95 |
| Machine Language Programming Made Simple | @ £ 8.95 |
| Understanding Your ZX81 ROM | @ £ 8.95 |

Postage and Packing £ 0.80

Remittance enclosed £

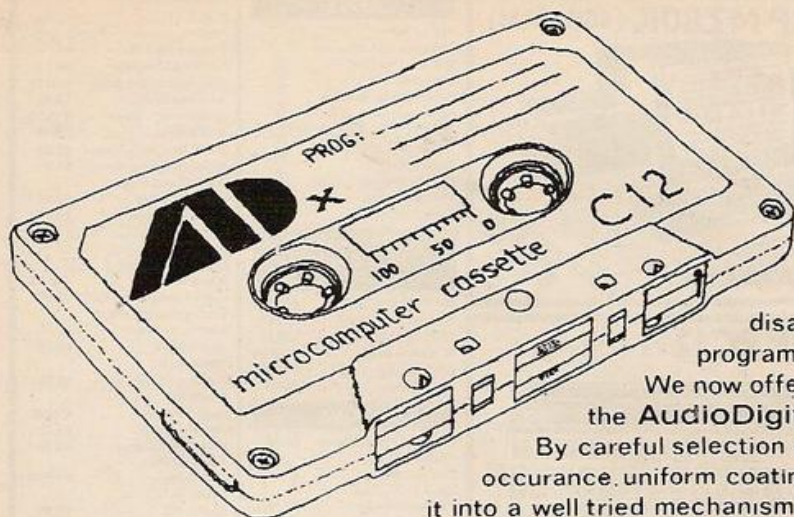

FREE!

Launch Offer

Until now, if you wanted to avoid the disappointment of fouled and lost micro-programs, you had to pay a great deal.

We now offer you **reliability** and **economy** with the **AudioDigital** microcomputer cassettes.

By careful selection of a tape with an extremely low dropout occurrence, uniform coating, and high saturation level and assembling it into a well tried mechanism in the Far East, we have achieved a truly reliable and economical product.

To prove this is not too good to be true, send us two s.a.e.'s and we will send by return a sample ADx C12 cassette and later a list of stockists. This offer is limited to the first 10,000 replies received before the opening of the 1982 Microcomputer Fair in April.

The ADx C12 carries a R.R.P. of 47pence each, with good quantity discounts and a full 12 months guarantee.

Sole U.K. distributor:
BASICare
Microsystems Ltd.
5 Dryden Court,
London
S.E.11 4NH

Dealers, are you prepared for the demand on the ADx C12 cassettes?
Call to-day on 01-735 6408.....



**moving ahead
with
ZX software**

ZX CHESS & ADVENTURES

PROGRAMS FOR THE ZX81/80 INCLUDING -

ZX CHESS I
reduced to £6.50

ZX CHESS II
now only: £12.99

ADVENTURES
ADVENTURE 'A'
£6.00

ADVENTURE 'B'
£7.00

ADVENTURE 'C'
£8.00

Very popular machine code program, with six levels of play and an analysis option. Unbeaten except by:

A new improved version, with a faster response time, seven levels of play, and in addition a recommended move option.

Exciting machine code games with instant response, choose from the range below. You find yourself stranded on an alien planet.

Can you reach your ship and escape?
In a jungle clearing you come across an Inca temple. You must break in, collect treasure and escape alive. Beware. Includes a cassette save routine.

You are unfortunate enough to be drawn to an alien cruiser. Can you reach the control room and free yourself or will they get you first?
Includes a cassette save routine.

GALAXY WARRIOR £3.00

Fast and exciting interactive animated graphics game. Hunt clings and go through black holes...

1K GAMES PACK £6.00

and many more. For a catalogue giving full details, please send a S.A.E. to:

GALAXIANS £6.50

All the features of the arcade game in a fast machine code program. Swooping attackers, explosions and personalised scoring.

ZXBUG £7.00

A 30 in 1 machine code tool and disassembler, allows access to registers and search through and modify memory; with cassette routines.

Artic Computing,

396 James Reckitt Avenue Hull, HU8 0JA



ZXCHESS



TWO GREAT ZX81 16K CHESS GAMES ZXCHESS (ENHANCED)

- Written totally in machine code.
- Full graphic display of Chess board.
- Six levels of play: Two play within competition time limits.
- Option to play Black or White.
- Plays all legal moves including castling and en-passant.
- Cassette routines for saving unfinished game and returning to later.
- Displays moves of game on screen or printer for analysis.
- Print a copy of the Chess board onto the printer.
- Board can be set up in any position, you can even swap sides midgame.
- Clear whole board with one command: for end game analysis.

£6.50

ZXCHESS II We believe the strongest ZX81 Chess game as no other has beaten it!!

- All the features of ZXCHESS plus:
- Book of 32 opening moves.
- Seven levels of difficulty: FOUR play within competition time limits.
- A move is suggested by the ZX81 if wanted.
- Optional Full Graphic version using the QS CHRS Board.

£12.99

2 copies supplied on cassette with full instructions.
Cheques and postal orders payable to:




ARTIC COMPUTING

396 JAMES RECKITT AVENUE,

HULL HU8 0JA





THE SYMBOL OF VALUE

NASCOM

| | |
|--------------------------|---------|
| KITS | |
| Nascom 1, with | |
| NAS-SYS 1 less PIO | £112.50 |
| Nascom 2, no user RAM | £202.50 |
| BOARD LEVEL | |
| Nascom 1, with | |
| NAS-SYS 1 less PIO | £126.00 |
| Nascom 2, no user RAM | £238.50 |
| CASED SYSTEMS | |
| Nascom 3, no user RAM | £338.40 |
| 8K user RAM | £36.00 |
| 16K user RAM | £90.50 |
| 32K user RAM | £103.50 |
| 48K user RAM | £117.00 |
| POWER SUPPLY | |
| Kit form | £29.25 |
| MEMORY CARDS | |
| RAM B memory card | |
| with 16K RAM - kit | £72.00 |
| RAM B memory card | |
| with 16K RAM board | £90.00 |
| Additional 16K RAM | £13.50 |
| Additional 32K RAM | £27.00 |
| I/O BOARDS | |
| I/O boards for 3 x PIO, | |
| 1 x CTC, 1 x UART | |
| (kit) ex PIO | £40.50 |
| PIO for above I/O | £10.80 |
| CTC for above I/O | £12.60 |
| UART for above I/O | £14.40 |
| DISC SYSTEMS | |
| Nascom single disc drive | |
| (350KB) incl. FDC card | £423.00 |
| Nascom dual disc | |
| drive (350KB each) | |
| incl. FDC card | £616.50 |
| NAS DOS disc pp system | £40.50 |

SOFTWARE

| | |
|------------------|--------|
| NAS-SYS 1 ROM | £10.80 |
| NAS-SYS 3 EPROM | £18.00 |
| ZEAP 2.1 for NAS | |
| SYS in 4 x EPROM | £26.30 |
| ZEAP 2.1 for NAS | |
| SYS on tape | £22.50 |
| 8K microsoft | |
| basic in ROM | £18.00 |

ATARI

| | |
|------------------------|--|
| 800 Computer | |
| 400 Computer | |
| Recorder | |
| Disk Drive | |
| 16K RAM | |
| Joysticks (pair) | |
| Blank Diskettes (5) | |
| Assembler Editor | |
| Space Invaders (ROM) | |
| Star Raiders (ROM) | |
| Missile Command (ROM) | |
| Asteroids (ROM) | |
| Invitation to | |
| Programming (1) | |
| Invitation to | |
| Programming (3) | |
| Touch Typing | |
| Conversational French | |
| Conversational German | |
| Conversational Spanish | |

TAPES

| | |
|---------------------|--------|
| Blank C12 | £4.00 |
| Tapes (6 mins/side) | for 10 |


SHARP MZ80K (48K RAM)



SUPAVALUE

£326
+ VAT

SHARP PC1211

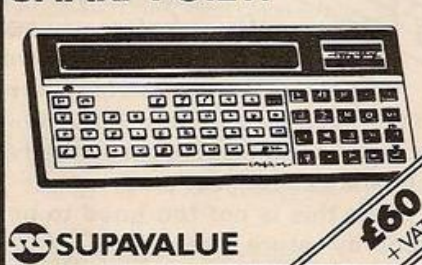

SUPAVALUE

£60
+ VAT

ATARI 800 (16K RAM)



SUPAVALUE

£100
+ VAT

APPLE

| | |
|----------------------------|--|
| Apple II 48K | |
| Disk drive with controller | |
| Disk drive without | |
| controller | |
| Parallel printer interface | |
| High speed serial | |
| interface | |
| Colour card | |
| Apple Writer | |
| PASCAL language system | |
| Silentyne printer | |
| Blank diskettes | |

RING FOR OUR PRICES.

ACCESSORIES FOR APPLE (Not Apple Manufacture)

| | |
|--------------------|---------|
| 16K RAM card | £85.00 |
| Z80 processor card | £85.00 |
| CP/M disk & manual | £28.75 |
| 80 column board | £162.50 |
| Display switch | £18.00 |
| Slot extender | £8.00 |

BOOKS

| | |
|------------------------|--------|
| Computers for Everyone | £6.00 |
| Science & Eng | |
| Prog Apple II Ed | £11.60 |
| Apple BASIC Data | |
| File Programming | £8.95 |
| Make a success of | |
| Micro-computing in | |
| your Business | £4.95 |

| | |
|-------------------------|--------|
| Inside BASIC Games | £11.50 |
| Intro to PASCAL | £11.50 |
| PASCAL H'book | £13.95 |
| Program the Z-80 | £11.95 |
| Your First Computer | £7.75 |
| 6502 Applications Book | £10.25 |
| Advanced BASIC | £8.95 |
| Apple II User's Guide | £11.10 |
| Basic BASIC | £8.95 |
| BASIC Business Software | £7.05 |
| BASIC Computer Games | £5.95 |
| BASIC Comp Progs | |
| in Science & Eng | £8.55 |
| BASIC with style | £6.95 |
| BASIC A self | |
| teaching guide | £5.95 |
| CP/M User's Guide | |
| (Osborne) | £10.10 |
| Game Playing with BASIC | £8.20 |
| Getting acquainted with | |
| your Acorn Atom | £7.95 |
| Instant BASIC | £8.75 |
| Micros Vol 0 | |
| Beginner's Book | £3.50 |
| Micros Vol 1 | |
| Basic Concepts | £10.10 |
| Microsoft BASIC | £8.75 |
| More BASIC Games | £6.25 |
| Mostly BASIC | |
| Applies Apple II | £7.95 |
| Mostly BASIC | |
| Applies PET | £7.95 |
| Programming a | |
| Micro - 6502 | £8.05 |


**YOU'LL VALUE OUR EXPERIENCE
YOU'LL VALUE OUR PRICES**

ACCESS & BARGAIN CARD WELCOME - HIRE PURCHASE & PART EXCHANGE AVAILABLE
ALL PRICES EXCLUDING VAT I.L.D.C.B.



SRS MICROSYSTEMS

161 Bramley Road, Oakwood, London N14 4XA.
Telephone: 01-363 8060.
(Closed Monday).

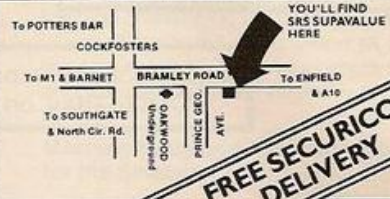

**FREE SECURICOR
DELIVERY**

If you own a ZX80/ 81 then you need the ABACUS CONTROLLER

●BUILT IN MICROPHONE/ SPEAKER:

Allows you to name
programs before
saving and cue up
programs accurately
ready for loading

●SINGLE SWITCH OPERATION:

Load and save
programs simply by
selecting position on
switch. Eliminates
hum caused by
leaving both jack
plugs in cassette
recorder.

●PLUG IN CONNECTIONS:

Supplied ready to use,
just plug into
computer and cassette
recorder - no need
to remove plugs
again.



●SMART COMPACT CASE: White A.B.S. housing measuring 100 x 65 x 50mm.

TRS 80 OWNERS

Your controller
incorporates a
cassette motor.
Overide switch.
Price: £13.95.

●SIMPLE EASY TO FOLLOW INSTRUCTIONS:

Connect up the
controller in seconds
- learn to use in
minutes.

●70 CENTIMETRES OF CABLE:

Allows you to site
cassette recorder
conveniently.

Send Cheque or P.O. for £12.00 including P&P to:

ABACUS ELECTRONICS

186, St Helens Avenue
Swansea, West Glam.
Tel: (0792) 50282

VIC GAMES for the standard VIC 20

Challenging games of skill
and initiative all in
full colour and
with great sound effects

ASTRO-DOCKER: Get the supply pods safely through to
Scorpio's supply hatch. Progressive levels of
difficulty.

PETALS-AROUND-THE-ROSE: So you think you're
bright! Try and break this frustrating code in less than
100 attempts. As mind boggling as the cube.

MAZE OF DEATH: Can you guide your way through the
maze avoiding monsters and collecting rewards?
Watch out for the Hobgoblins!!

DEFENDER: Defend the planet's fuel elements against the
marauding aliens using lasers and photon torpedos.
Nine skill levels, time and score.

PROTECTOR AND SHIELDER: Use defence screens to
ward off attacking missiles - how long can you hold
out? Two games for the price of one.

PRICES: £6.95 for each cassette or £12.95 for any two.
Inc. P&P.

All programs produced on top quality cassettes.

ABACUS PROGRAMS

186 St. Helens Avenue, Swansea, W. Glam.
Tel: (0792) 50282

NEW ZX81

16K SOFTWARE

AN ENTIRELY NEW CONCEPT IN SOFTWARE FOR THE HOME COMPUTER.

WE BELIEVE THAT INFORMATION TECHNOLOGY WILL REPLACE THE BOOK.

THIS CASSETTE WILL GIVE YOU OVER 50 PAGES OF RECIPES.

SUBSEQUENT VOLUMES WILL BUILD UP A WORLD WIDE COOKERY BOOK.

SUPERB RECIPES TRIED AND TESTED BY THE AUTHORS.

GIVE THE LADIES A LOOK IN!

Mail order only

Send **£4.99** (inc. P&P and VAT)

Please specify Volume 1 as further volumes will follow shortly.

MICRO COMPUTER SOFTWARE
Unit D6, Pear Industrial Estate,
Stockport Road, Lower Bredbury,
Stockport SK6 2BP
Tel: 061-494 2441

THE

BUFFER MICRO SHOP

(NEXT TO STREATHAM STATION)

NEW SOFTWARE SHOP EXCLUSIVELY FOR

ZX81

PROGRAMS, GAMES, "ADD-ONS"

MOST OF THE MAIL ORDER ITEMS ADVERTISED
IN THIS MAGAZINE AVAILABLE OVER THE COUNTER

LOADING PROBLEMS? TRY OUR INTERFACE
BUSINESS & TECHNICAL DATA HANDLING PROGS;
PROPER KEYBOARDS; CONSOLES; VDUs

The **BUFFER** Micro Shop,
374a Streatham High Road,
London SW16
Tel: 01-769 2887



THE PROFESSIONAL ZX81 KEYBOARD

- All-you-need Keyboard Kit £28.95.
- Case only £15.00.
- Keyboard Kit assembled and soldered ready for use but without legends fitted £31.04.

All prices inclusive of VAT, postage and packing.
Please allow 21 days for delivery.

- Plug in — no desoldering.
- Space bar linked to space key.
- Full travel keys. Six spare keys for your own use.
- Case available to hold keyboard and ZX 81 microcard.
- 16K RAM pack clamp supplied with case to eliminate white outs!!



**COMPUTER KEYBOARDS DIV.
DEAN ELECTRONICS LIMITED**
Glendale Park Fernbank Road Ascot Berkshire England
Dial-a-leaflet 03447 5661 Telex 849242

HILDERBAY LTD PROFESSIONAL SOFTWARE

If you don't believe that the Sinclair ZX81 can do real work, come and see us at the Computer Fair Exhibition, Earls Court (23rd-25th April) and the ZX Micro Fair, Central Hall, Westminster, London SW1 (30th April-1st May).

ZX81 & 16K SOFTWARE: Reviewed in "Your Computer" (Feb. 1982).

- ★ Payroll for up to 30 employees. Meets all regulations £25.
- ★ Stock Control Fast, big, and versatile £25.
- ★ Budget £15.
- ★ Critical Path Analysis Up to 500 activities £15.
- ★ VAT & Mortgage & Loan £8.
- ★ GOLD: A really good adventure; together with the intriguing "Pick a Word". £8.
- ★ RELIABLE 16K RAM Pack for the ZX81 £42.
- ★ BEAMSCAN: Beam analysis for architects and engineers £25.
- ★ APPLE II Payroll: £35.
- ★ HEWLETT PACKARD 9845B: Superspline (general purpose interpolation and tabulation).
- ★ MEMOTECH 64K Memopak £79.

DO YOU HAVE DIFFICULTY LOADING TAPES! We have the answers; and for well under £10.

Contact us for more details.

CROFTON PROFESSIONAL KEYBOARDS, MONITORS, VDU's
Prices include VAT, Post & Packing. COD Orders £2 extra.

TAPE HINT: Don't use the first 20 seconds of your cassettes — most tape problems are found near the ends of the tape.

GOLD

An
**ADVENTURE
Game**

**COMPETITION
WIN A
64K MEMOTECH**

Open to all purchasers of 'GOLD'
or Games Pack 1.

A 64K Memotech will be sent to the
player who sends us the highest
score received by 31 July 1982.

Monthly prizes of blank cassettes
for your programs!

If you have already bought 'GOLD',
send sae for a copy of the rules.

© HILDERBAY LTD 1981

HILDERBAY LTD (YCM), 8/10 Parkway, Regents Park, London NW1 7AA.

Telephone enquiries for Hilderbay Ltd. will now be handled by HOLDCO LTD.
Tel. 01-251 3090

ZX81 & 16K SOFTWARE

EQUATION PACK: linear and quadratic equations, sets, equations of higher degree. £8.

MATRIX ROUTINES: the matrix statements of normal basic (MAT...) £8.

CALCULATOR PACK: the equivalent of RPN calculators. 40 operations and functions. £8.

ELEMENTARY STATPACK: mean, variance, stand.dev., stand.err., covariance, corr. coeff., anal. of variance, lin. regression £10.

METRIC/IMPERIAL/US CONVERSIONS: length, surface, volume, weights and measures, speed £6.

TRIANGLES: complete trigs package £8.

POLYNOMIAL EVALUATION: operations, zero's (int., real, complex) and Descartes £10.

BARCharts FOR ARCHITECTS: a simplified version, takes away the tedious task of manually handling the problem £25.

BANK ACCOUNT: calculate your bank charges whilst keeping your account £5.

HOLDCO GAMES — See our special advertisement in this magazine

Prices include VAT, Post & Packing. COD Orders £2 extra.

HOLDCO LTD.
14, BRITTON STREET
LONDON EC1M 5NQ
Tel: 01-251 3090

THREE PET TITLES

from Nick Hampshire

LIBRARY OF PET SUBROUTINES

A book which will save the software designer considerable time by providing 55 proven subroutines to integrate with his own programmes.

Each subroutine is preceded by a page of general information describing its purpose and implementation and possible problems that may arise. Basic, machine language and a combination of both, are used throughout this publication.

"... We like this book very much and thoroughly recommend it."

Printout

"... well prepared, fun to use, and will help in better program development."

Compute

THE PET REVEALED


A reference book which details everything you need to know about the workings of the PET. Containing information helpful to writing more elaborate programmes, which in turn create more interesting functions.

"... Should be congratulated. Supplies some much needed, useful and correct documentation."

Compute

"... 'PET Revealed' will save you an awful lot of time. I rate this book as good value for money."

Printout

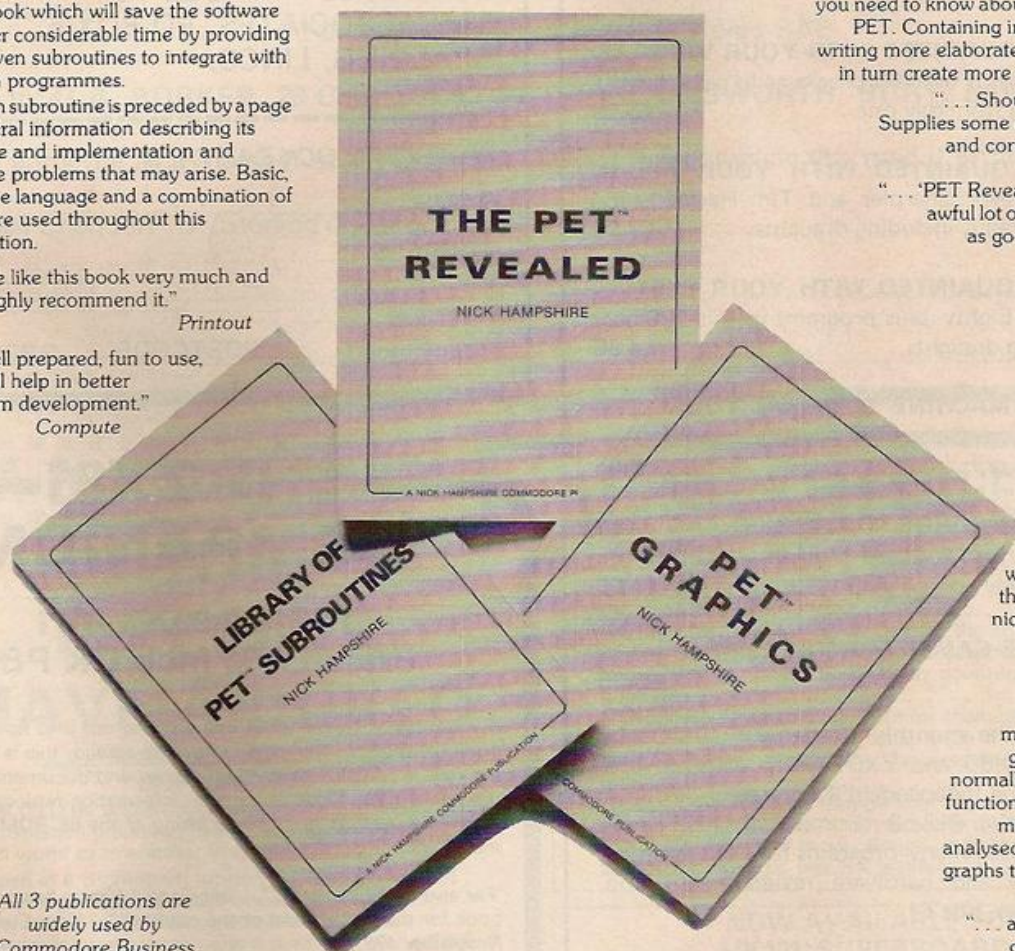

All 3 publications are widely used by Commodore Business Machines.

PET GRAPHICS

This book has two objectives. One, to provide the reader with an introduction to the programming techniques used to generate graphic displays.

Two, providing the programmer with a complete package of machine code routines giving a wide range of normally unavailable graphic functions. The book contains many comprehensively analysed routines and photographs to illustrate the effects created.

"... an invaluable guide to graphics on the PET."

Micro Forecast

Please send me:

- copy/ies of Library of PET Subroutines
@ £10.00 each
..... copy/ies of The PET Revealed
@ £10.00 each
..... copy/ies of PET Graphics @ £12.00 each

I enclose a cheque for £ payable to Computabits Ltd., P.O. Box 13, Yeovil, Somerset.

Name

Address

Postcode

ZX81 ATOM VIC

Make the most of your microcomputer with our popular range of proven books:—

- [] **GETTING ACQUAINTED WITH YOUR VIC 20**, by Tim Hartnell, with over 60 programs to get your VIC up and running from day one. **£5.95**
- [] **GETTING ACQUAINTED WITH YOUR ACORN ATOM**, by Trevor Sharples and Tim Hartnell. 184 pages, 80 programs, including draughts. **£7.95**
- [] **GETTING ACQUAINTED WITH YOUR ZX81**, by Tim Hartnell. Eighty plus programs in this 120-page book, including draughts. **£4.95**
- [] **MASTERING MACHINE CODE ON YOUR ZX81 OR ZX80**, by Tony Baker. 180 pages, teaches machine code from first principles. **£5.95**
- [] **THE GATEWAY GUIDE TO THE ZX81 AND ZX80**, by Mark Charlton. Over 60 programs and routines, ZX BASIC explained in detail. **£5.95**
- [] **49 EXPLOSIVE GAMES FOR THE ZX81**, edited by Tim Hartnell. **£5.25**
- [] **INTERFACE**, the monthly magazine published by the National ZX80 and ZX81 Users' Club, in conjunction with the Independent Atom Users' Group, is just £9.50 (UK), £12.50 (Europe) for 12 issues. **Sample copy**, with many programs for each machine, book, software and hardware reviews, education, contact addresses, **just £1.**

Please send me the items marked. I enclose £

Name:


Address:

Postcode

Please make cheques payable to **INTERFACE** and send the above form, or a copy, to: **INTERFACE, Dept. YC14 44-46 Earls Court Road, London W8 6EJ**

ZX81 OTHELLO

EXCEPTIONAL
COMPUTER
RESPONSE
(AV. 15 SECONDS)

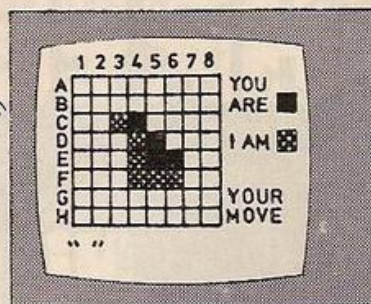

WE
CHALLENGE
YOU

IF YOU OWN A SINCLAIR ZX81 (16K) PIT YOUR WITS AGAINST THE ZX81 COMPUTER AT **ZX81 OTHELLO** SEND **£3.95** PAYABLE TO DLS ASSOCIATES, PO BOX 5, SPALDING, Lincs.

Please use **BLOCK CAPITALS**

YC482

NAME

ADDRESS

..... POSTCODE

THE ZX81 COMPANION

ISBN 0 90721 01 1
Price **£7.95 incl. UK P&P**

If you have a Sinclair ZX81 and want to use it to its full potential then, as the experts have all agreed, this is the book for you. It contains detailed guidelines and documented programs in the areas of gaming, information retrieval and education, as well as a unique listing of the 8K ROM for machine code applications.

'Far and away the best . . . once again Linsac has produced the book for the serious end of the market'. — *Your Computer*, November 1981.

'The ZX81 Companion is a most professional product . . . with many good illustrative programs, tips and warnings'. — *Education Equipment*, October 1981.

'Bob Maunders' attempt to show meaningful uses of the machine is brilliantly successful . . . thoughtfully written, detailed and illustrated with meaningful programs . . . To conclude — the book is definitely an outstandingly useful second step for the ZX81 user'. — *Educational ZX80/81 Users' Group Newsletter*, September 1981.

Send your cheque for £7.95 to:

LINSAC (YC) 68 Barker Road, Linthorpe
Middlesbrough TS5 5ES

ZX81 ZX81 JOIN ZX-GUARANTEED

(Club is devoted exclusively to the ZX81 . . . and ZX82 when available)

All games/progs are guaranteed error free. ZX-guaranteed is not just games, it is intended to be educational to the user. Includes articles on BASIC, PEEK, POKE, MACHINE CODE, FLICKER FREE PROGRAMMING, HINTS & TIPS, etc. etc.

Membership is April to April. If joining late, all current year's back issues sent. Membership £5 per year. (Overseas £6.50. Outside Europe by air £10).

For sample back issue send £1 plus SAE

Send to: **G.A. BOBKER, 29 CHADDERTON DRIVE, UNSWORTH, BURY, LANCs. BL9 8NL**

Please enrol me as a member of ZX-GUARANTEED. I will complain like mad if errors found.

I enclose Cheque/P.O./Sterling draft for _____

NAME _____

ADDRESS _____

* **A & F SOFTWARE** *

THE CYLONS HAVE ARRIVED



GO104 CYLON ATTACK: This 3D all action game in high resolution graphics, takes you into the Science Fiction world of Interstellar Wars.

Strapped in a Starfighter, looking out into the void of space, you glance at the instruments, the long range scanner has the CYLONS pinpointed. You select the nearest target and turn to meet it ready to defend Earth to the end!!!

In keeping with our Companies pricing policy on all ATOM GAMES SOFTWARE this REMARKABLE game is only £4.95

5K Text 6K Graphics — NO FLOATING POINT.

GO105 ROBOT NIM Perhaps the most entertaining and novel versions of this classic puzzle available. Watch the antics of the Robot as you vie with Atom ☐ for control of the game. Offered at the give-away price of only £4.95

Special Offer! Deduct £1.00 per additional cassette when ordering two or more programs

ORDERS TO:

**A & F SOFTWARE, 10 WILPSHIRE AVENUE,
LONGSIGHT, MANCHESTER M12 5TL
24 HOUR TELEPHONE ORDERS ON (061) 248 7195**

Orders normally dispatched within 72 hours

Please enclose a SAE with enquiries

Co. Reg. No. 2771093

ATOM UK101-SUPERBOARD

OTHER TITLE FOR THE ATOM

GO100 POLECAT: Avoid being eaten by polecat searching the maze for you. 5K test 6K graphics£4.95

GO101 EARLY WARNING: Destroy the attacking ICBM's using a realistic radar display and intercept missiles. 48 levels. Sound. Score and screen counters. 4K text 6K graphics£4.95

GO102 MINEFIELD: Watch out for chain-reactions as you clear the mines with your tank. Each mission becomes harder! Sound. Score and high score. 5K test ½K graphics£4.95

GO103 TANGLED: Challenge your friend or the Atom to this game of skill. The more you score the harder you find the game. Four skill levels. Sound. Individual and highest scores displayed. 5K test ½K graphics£3.95

NOW AVAILABLE FOR UK101/ SUPERBOARDS 2K RAM BASIC TOOLKIT

This toolkit adds nine new basic words for you to use. The tape loads from Basic with or without another program present. It loads directly into the top 2K of RAM independent of the RAM size and secures its own boundaries.

Features: Fast load in under two minutes, and is compatible with all popular monitors and basics*.

New commands: Auto, Help, Find, Dump, Step, Trace, Off, Delete and Renumber.

Excellent value at only £7.95.

* Disables Basic 5 commands (please state, machine and monitor when ordering).

ALSO SGO100 MADMAN. Watch out for the Guardians as you travel the maze collecting points and bonuses. Can you beat the high score so far — 141,600?

Runs in 8K. Priced at £4.95.

We pay 25% royalties on Atom — UK101 — SUPERBOARD and NASCOM II PROGRAMS — PHONE FOR DETAILS.

LASERBUG

London And South East Region BBC Users Group

Whether you are a BBC Microcomputer owner, have limited access or are merely interested, then **LASERBUG** has something to offer you.

LASERBUG is an independent users group dedicated to the support and enhancement of the BBC Microcomputer.

LASERBUG is a central point for ideas and information — we want to hear from you and pass on your ideas and discoveries. Write to us at the address below — but please enclose a SAE if you want a reply.

LASERBUG newsletter is distributed to members each month and is full of news, reviews, letters, articles, programs, contacts and classifieds (rates on application). Our regular meetings also go a long way to help you get the best out of your BBC Microcomputer.

You want to join? For £12.00 you get a year's subscription to **LASERBUG**, 12 issues of the newsletter and free entry to all **LASERBUG**'s meetings and shows — or send £1 and a large SAE for a sample copy of the **LASERBUG** newsletter and all the latest information.

Write to:

LASERBUG

Box No 100, Your Computer, Quadrant House
The Quadrant, Sutton, Surrey.

ACORN ATOM QUEST FOR

Somewhere in the Old Country House, the famous AFRICA DIAMOND was hidden. Legend has it that possession of the gem will give countless wealth and even magical powers! However, to take the gem is no easy task! Vampires, dwarfs, wild dogs, to name a few, have taken over the house, and will welcome you with open jaws! If you can get to the gem, a surprise awaits you! All this makes the AFRICA DIAMOND a true test of cunning, intelligence and wit. Are you smart enough to take the gem? After all, the most you have to lose is your life!

THE AFRICA DIAMOND

Maybe the most advanced adventure game written for the ACORN ATOM. AFRICA DIAMOND was written to give you a full 10K of program power for the regular expanded ATOM, in doing the AFRICA DIAMOND has used techniques new to ATOM programs.

RAMTRONICS

Please rush me AFRICA DIAMOND. I enclose cheque/PO for only £8 (fully inclusive). Payable to Ramtronics.

Name

Address

.....

.....

Send to:
RAMTRONICS, P.O. BOX 173, LONDON SE24 9QZ

ZX81 Hardware

KEYBOARD Kit £20.50 Built £25.75

Simply plug in, the ???????? (built version)

40 typewriter style keys.

All graphics and keywords shown on keys.

KEYBOARD CASE £10.30

For our keyboard (does not hold ZX81).

Black or grey plastic.

Aluminium top. Punched to fit our keyboard.

KEYBOARD IN CASE Built £36.15.

24 LINE I/O PORT Kit £16.95 Built £18.95

24 lines. In or Out.

Controlled by BASIC.

MUSIC BOARD/Timer, Osc Board. Kit

£16.95 Built £19.95

3 channels. .01Hz to 800KHz.

Controlled by BASIC.

CONNECTORS

23 way gold plated female connector.....£2.95

23 way male connector£1.30

24 way ribbon cable (per metre)£1.40

Assembled connector to mount RA.

pack away from ZX81

£6.95

All prices included VAT and P&P.

?????????

Send 9x7 SAE for free illustrated catalogue.

Payment by cheque or postal order or ACCESS.

REDDITCH ELECTRONICS (YC)

21 Ferney Hill Avenue, Redditch,

Worcs B97 4RU

Tel: (0527)61240

NOW STOCK!

a must for your ZX81

Authors:

Ian Stewart & Robin Jones

The reader-friendly guide
to getting started with
the Sinclair ZX81.

Includes an intro-
duction to looping and branching,
graphics, subroutines, and debugging techniques, with over
50 programs designed to run on the standard 1K memory.

110 pages — Paperback £4.95

ISBN 0 906812 17 8

Published by: Shiva Publishing Ltd. 4, Church Lane,
Nantwich, Cheshire CW5 5RQ. Telephone: (0270) 628272

Order from your bookseller or fill in the coupon

Please supply me with copy/copies of PEEK,POKE,BYTE &
RAM. For 1st Class Postage please add 25p

Price: £4.95 per copy. Cheques payable to Shiva Publishing Ltd.

NAME (Capitals please)

Full Postal address

For payment by Access/American Express

Card No. Signature



ASSOCIATION OF LONDON COMPUTER CLUBS

Proudly presents

THE 3rd LONDON COMPUTER FAIR

APRIL 15th 16th & 17th 1982 10am - 6pm
[7pm 16th]

Including: Retail Exhibitors • Hobbyists
Club Stands • Seminars • Workshops
Bring and Buy Sale [17th only]

Admission £1.00

POLYTECHNIC OF NORTH LONDON
THEATRE

⊖ Opposite Holloway Rd. tube station ⊕

SPONSERED BY EDUCATIONAL COMPUTING,
COMPUTING TODAY and

The Polytechnic
of North London

ZX-80 & ZX-81

THE FINEST MACHINE CODE FAST MOVING GRAPHICS ARCADE GAMES AVAILABLE

QS-DEFENDERS



UP-DOWN-THRUST-FIRE CONTROLS. FULL SCREEN DISPLAY. 84 fast moving chrs. 10 missiles. Attack waves. Moving surface. Generally considered to be the best arcade type game written for the ZX COMPUTERS. REQUIRES 3K RAM; 8K ROM

QS-ASTEROIDS



LEFT-RIGHT-THRUST-FIRE CONTROLS. 2 sizes of ASTEROIDS. Wrap-around screen. Full mobility of ship. Bonus ship. QUICKSILVA'S latest arcade game. As good as QS-DEFENDER. REQUIRES 4K RAM; 8K ROM + SLOW MODE

Both programs feature on screen scoring and have software to drive QS SOUND BD. They are recorded twice on High quality cassettes and have FULL COLOUR cassette inserts of original paintings by 'STEINAR LUND'

HARDWARE

QS MOTHER BOARD AND QS CONNECTOR

The heart of any expansion system. Features on board 5V regulator + two expansion sockets to take add-on boards. Can be used in two ways.

- 1) ZX COMPUTER CONNECTOR-ANY SINGLE ADD-ON (but no extra RAM PACK)
- 2) ZX COMPUTER CONNECTOR-MOTHER BD. (for two extra bds).

ANY RAM PACK

QS 3K RAM BOARD (using 2114 I.C.s)

A 3K static Ram bd to fit ZX-80/81. Combines with original 1K to give 4K

QS SOUND BOARD (using AY-3-8910)

A 3 channel sound effects and music board easily programmed from BASIC

QS CHRS BOARD

A programmable Graphics generator giving user control of 128 different chrs. Comes with Demo cassette of M/C routines for easy use. Works with ZX PRINTER (Demo cassette available separately to make use of Printers graphics possibilities).

NEW HARDWARE

QS HI-RES BOARD (available end of Jan). 256 x 192 PIXELS. SOFTWARE SELECT. 6K ON BOARD RAM. MIXED TEXT & GRAPHICS. RESIDENT HI-RES SOFTWARE IN ROM.

COMMANDS . . . MOVE x,y; PLOT x,y; DRAW x,y; PRINT X; COPY; WHITE; BLACK; CLEAR

A MASTERPIECE of ZX design. Resident software in ROM provide extremely fast Hi-res facilities. No tedious cassette loading. No loss of valuable Ram space. Just instant HI-RES GRAPHICS. Screen may COPIED TO the printer.

All products fully guaranteed. Fully inclusive prices are as follows:

QS DEFENDER £5.50/QS ASTEROIDS £5.50/QS CHRS DEMO (separately) £3.50
QS MOTHER BD. £12.00/QS CONNECTOR £4.00/QS SOUND BD. £26.00
QS CHRS BD. £26.00/QS 3K RAM £18.00/QS HI-RES £85.00

Cheques should be made payable to "Quicksilva" and sent to the following address

QUICKSILVA, 95 UPPER BROWNHILL ROAD,
MAYBUSH, SOUTHAMPTON, HANTS.

Send S.A.E. for Catalogue and data sheets to above address.

COME AND SEE OUR FULL RANGE AT THE ZX MICROFAIR MAY 1982

ATOM USERS!



ADPROM 4000 UNIT

for adding on EPROMS as required. Can be used on other computers with 24 pin EPROM sockets (e.g. ZX 80). . . . £32 (excl. vat & p.p.)

WANTED!! Elegant programs for our EPROM and TAPE library service. Details on request with brochure.

ATOM CONSOLE CASE

Case only . . . £25 (excl. vat & p.p.)

Polished teak veneered sides, textured black stielvetite and aluminium chassis. Plenty of room inside for RAM expansion (units available from us), power supplies etc., and T.V. on top. Available as case only, or with integral RAM expansion unit, and/or integral ADPROM 4000.

CASES FOR YOUR OWN PROJECTS

Low priced QUALITY cases-STRONG enough for the workshop-ATTRACTIVE enough for the home.

Matt black plastic end cheeks, textured Stielvetite body . . from £6-25
Teak veneered end cheeks, Aluminium & Stielvetite body . . from £7-88

(excl. vat & p.p.)

FOR BROCHURE & PRICE LIST SEND A5 SAE TO

ELINCA PRODUCTS LTD., LYON WORKS
CAPEL ST., SHEFFIELD S6 2HL

DIS-ASSEMBLER 5-1 £10

For the VIC 20

D/H-H/D converter.

FULL MNEMONIC

follow the jumps
take the returns,
selectively
dumps to screen-printer
or tape for printing by pet

DIS-ASSEMBLER 4-1 £10

For the PET like 5-1

brings

understanding to the novice

sophistication to the expert

KALEIDOSCOPE £7

a program displaying
the 8 million colour
combinations on the
standard VIC 20
& shows you how
to program them
both hi-res & multicolour

PIXEL TWIXEL £12

Define hi-res pixels or
multicolour twixels
with just this program on a
standard VIC
no plug-in extras needed

QUADRANT HOUSE

read all about it in
PRACTICAL COMPUTING
Today



PLEASE ADD 15% VAT

Avon Computer Rentals


FREEPOST 6 THORNBURY BRISTOL BS12 1BR
TELEPHONE (0454) 415460

ZX81 GAMES

FED UP WITH BEING RIPPED OFF?
HAVE YOU BOUGHT
BORING/WORTHLESS/RUBBISH GAMES?
DON'T DESPAIR, TRY THESE!

GAMESTAPE 1, for 1K only £3.95
10 games incl. ASTEROIDS, UFO, CODE, BOMBER,
GUILLotine, ETC.
PROBABLY THE BEST VALUE 1K TAPE AVAILABLE!
We've done in 1K, games that some of our competitors
required 16K to do!

ASTEROIDS



STARFIGHTER GAMESTAPE 2, for 16K only £4.95
*STARFIGHTER . . . You are fighting at the end of the
universe, how many enemy can you destroy? A graphic
simulation.
PYRAMID . . . Can you move the PYRAMID? Make a
mistake and it will collapse! A thinkers game.
ARTIST . . . become an ARTIST, then use the 10
memories to store your drawings. Incl. SAVE, COPY, etc.

GAMESTAPE 3, for 16K only £4.95
*CATACOMBS . . . A Multi-Level Graphics Adventure.
You are alone and lost in the CATACOMBS. How long
can you survive? Before you starve to death, or one of
the many MONSTERS gets you! Can YOU discover the
secrets of the CATACOMBS.



3D MONSTER MAZE GAMESTAPE 4, for 16K only £5.95
Unbelievable Graphics! Can you find your way through the
Maze? The EXIT is there somewhere, but then so is a T.REX
and its after YOU! All in 3D, you've never seen anything like
this before!



GAMES MARKED * incl. Machine Code

J. K. GREYE SOFTWARE

Dept. YC, 16 PARK STREET, BATH, AVON BA1 2TE

Trade enquiries welcome

SOFTWARE

for ZX-81(1K & 16K) or BBC Micro

New maths programs – improve your maths and programming skills by playing Simon maths Games.

Choose your own level of difficulty – suit ages 10-16.
10 programs on each tape – most incorporate Moving Graphics and are fun to run.

Let your computer help you to pass your exams.

| | |
|----------------|--|
| Maths 1 | Number, Area, Fractions, Decimals, Money, Length, Number, Estimation, Test 1, Game 1. |
| Maths 2 | Volume, Ratio, Percentages, Perimeter, Bases, Time, Number, Estimation, Test 2, Game 2. |
| Maths 3 | Directed Number, Co-ordinates, Angles, Scale, Probability, Density, Temperature, Estimation, Test 3, Game 3. |
| Maths 4 | Square Roots, Indices, Circles, Inequalities, Statistics, Number, Fractions, Angles, Test 4, Game 4. |
| Maths 5 | Equations, Directed Number, Statistics, Probability, Circles, Equations, Pythagoras, Simultaneous Equations, Test 5, Game 5. |

Simon Software

Quality tapes copied at normal speed for better reproduction.

Cassettes £4 each (inc. VAT).

Printed Programs £1 (inc. VAT).

Please add £1 p&p.

FREE! blank tape with each set ordered.

Send cheque/PO to: Simon Software,

Freepost, New End, Redditch.

(State ZX-81(1K), (16K) or BBC)



Microgame Simulations ZX81 (16K)

Soccer Supremo Run your favourite club in your own style, controlling game strategy, watching your team play other great sides in the Super League, transferring players, including star names, making boardroom decisions or delegating to solve business problems; improve facilities; spend gate money; lots of the fun and headaches of the soccer boss's lifestyle. Includes graphics.

Balance of Power As leader of a superpower you strive to maintain superiority of arms over a neighbouring country. The problem is that you and your enemy are mutually dependent on each other for raw materials. Can your economic, diplomatic and military judgements prevent a rapid slide towards nuclear war? Use threats, sanctions, force, tactical concessions etc.

Tycoon Start a company producing "widgets" and compete in the market against a computer controlled rival. Start small and build up your business or borrow money and start big. You have to make decisions about financing, staffing, factory space, machinery etc.

Battle of Britain As strategic commander of nine British fighter squadrons you must track and intercept the devious enemy bomber squadrons before they reach London. Micro acts as a flight control and communications centre for patrols, missions, intelligence reports etc. Sketch map provided. May also be played on any map of SE England with standard grid.

Asset Stripper Compete against your computer controlled arch-rival "KO Investments", capitalizing companies on the stock market and bidding for takeovers to gain control of lucrative assets. Can your micro really outwit you?

Kingdom of Nam As ruler of Nam you must control its economy; allocating labour; building cities, factories and ships; importing and exporting; negotiating pay claims and fighting the looming threats of inflation, strikes, starvation, overpopulation and revolution. How long can you stay in power?

All programs 16K for 1 player.

Send £4.95 for 1/£8.90 any 2/£12.85/£16.80/£20.75/5

73 The Broadway, Grantchester, Cambridge CB3 9NQ

Have you bought a ZX81? Now here's a cassette recorder to match it!

The ECR81 Enhanced Certified Recorder from MONOLITH is a major advancement in cassette recorder technology which minimises the problems associated with standard audio recorders. This is a high quality proven cassette mechanism, enhanced to provide just the right signal levels to ensure reliable read and write data transfer between the magnetic tape and your ZX81.

- Each ECR81 comes complete with its own individual certification tape, tested and serial numbered to prove your machine reliability.
- Signal enhancement circuit board with phase - locked - loop control and signal shaping for peak performance.



£47.50

Including VAT.
complete

- A long life head is fitted, matched to TDK CrO2 high bias, super avilyn cassette tapes.

- Mains & DIN connector leads provided.
- Certification of tape head alignment - height and azimuth.
- Certified tape tension, torque and speed.
- Fast forward and rewind tape search controls.

The ECR81 is also suitable for Sinclair ZX80

- Please allow up to 28 days delivery.
- The ECR81 is backed by our 14 day money-back option.
- The ECR81 is not suitable for audio reproduction.

MONOLITH
electronic products
Telephone: Crewkerne 0460 74321

To: MONOLITH ELECTRONICS CO. LTD., 5/7 CHURCH STREET, CREWKERNE, SOMERSET

Please supply me with:

----- (Qty.) Monolith ECR 81 Enhanced Certified Recorder(s) £47.50 (Each)

to be used with my ZX81

I also enclose postage & packing per recorder

£2.50

Please print

Prices include VAT

£

Name: Mr/Mrs/Miss.

Address

EDUCATIONAL COMPUTING

Suit
children
ages 5-11

on the ZX81

No comparable
collection
offers so much
for so little

THE
LITTLE
PROGRAMMES
WHICH ARE
BIG
EDUCATORS

Here at last. A set of programmes to turn your Sinclair ZX81 into a powerful educational tool. And you don't even need to know programming. There are clear instructions and plenty of tips & advice. Designed to go beyond drill & practice the promote learning through interaction & discovery.

All programmes
fit 1K

Creative use of
graphics

Many innovative
ideas

Fully documented

Includes many
games

Educare's
50

1K PROGRAMMES
for
PRIMARY
EDUCATION

Includes:-

TORTOISE

A simplified
version of the
famous Turtle
programme

CODED MISSILE

Combines the
fun of arcade
games with
learning

£4.95 only

incl. p & p

Graph-plotter • Histogram • Simon-spell • Sketchboard • Times-table • Sets
Series-quiz • XY-coordinates • Count • Equations • Areas • Guess-a-Volume
Angles • Upstairs-Downstairs • Music-notes • See-saw • Wipe-out • Spell
Temperature • Clock • Money • Snake
Mastermind • Number-shoot • +26 more

EDUCARE

To:
EDUCARE
139a Sloane St.
London
SW1X 9AY

Please send mecopies Educare's 50.

I enclose cheque/postal order for £.....

Name.....

Address.....

Let your child benefit early. Send now.

CALCULEX VII

ZX 80/ 81 General Statistical Program

This powerful new system converts your ZX81 (16 RAM) or ZX80 (8KROM) into an instrument for calculating the whole range of required statistical measures and at the same time constitutes a progressive course in the fundamental ideas of statistics as a theoretical subject. It offers many options both for calculation and for instruction. It of course plots on the CALCULEX Graph data input singly as a histogram or bar chart and data input with classified values as a frequency polygon. It automatically calculates the number of items input, the mean, the sum of deviations and of squares, the population and sample variance and standard deviations and allows one to compare the graph drawn in this way with the normal curve distribution, adjusted appropriately for the mean and standard deviation of the data input (showing on the face of the graph the length of one and two standard deviations). Other calculation options are: 1. determination of the binomial coefficients 2. calculation of binomial probabilities for differing values of P and Q 3. calculation of the correlation coefficient for data graphed as a scatter diagram and of the linear regression equation for the data 4. calculation of chi-squared for comparing expected and actually found experimental values 5. calculation of probabilities where the Poisson distribution is required. The more instructional section of the program explains and illustrates the binomial theorem and its application to probability problems, explains the use and significance of the correlation coefficient and regression and of the chi-squared measure and, very interestingly, the manner in which the properties of the normal frequency curve depend on the mean and standard deviation of the given data. (The integral of the equation of the normal curve can be calculated directly using CALCULEX II as advertised in *Your Computer* in March).

As with CALCULEX II, the system can be operated immediately by anyone without difficulty and will give you more grasp of the methods and principles of statistics than usual textbook teaching can achieve. Invaluable for A level statistics, for higher courses in the social or physical sciences requiring statistical techniques and as a practical instrument for anyone who has to process statistics. On cassette with full instructions and guidance.

Send cheque/PO for £12 to:

CALCULEX


21 Headland Avenue, Seaford, Sussex

MACRONICS

ZX81

26 Spiers Close
Knowle, Solihull
West Midlands
B93 9ES England

ZX80




1K Space Intruders £5.00
3K Super Version £6.00

Written in machine code
to give fast moving
'Flicker Free' graphics.
A superb achievement.
Supplied on cassette with listing



16K High Resolution £4.00
(192x184) graphic pictures

Never before achieved on the ZX.
Create your own artwork.
Supplied on cassette with listing
and demonstration picture.



9K Nightmare Park £3.75

The park of DEATH — can
you get through this
nightmare. No human has
yet succeeded. Confronted by all
sorts of 'Happenings' you'll be
taken to your wits end.
Supplied on cassette only.

Specify 4K, 8K ROM or ZX81 when ordering.

NEW INTERACTIVE GRAPHICS for the 16k ZX81

DRAGON MAZE... are you cunning enough to evade
the dragon? you are impeded by darkness; the walls
are only displayed when you make a bad move, this
gives the dragon an advantage. You have to play by
the rules - the dragon breaks them when he gets
angry. Fun for all ages!

Cassette and listing..... £5.00 (for ZX81 only)

WORLD CUP 82

ZX81 SOFTWARE (16K)

This program will simulate the 1982 World Cup
action. Set each team performance rate and kick
off.

Other programs included:

• **ENGLISH LEAGUE/ PREMIER LEAGUE/
WORLD LEAGUE/ ANGLO SCOTTISH
LEAGUE**

- Set your own weighting
- League positions on request
- Relegation/promotion
- 10 year history

• **FA CUP/ SCOTTISH CUP/ EUROPEAN CUP**

- Set your own weighting
- Last 10 years history

Unlike most games software, this package
will hold your interest

SEND £5.50

GLENROTHES COMPUTER SERVICES
81 ARDROSS PLACE, GLENROTHES
FIFE KY5 2SQ

CALCUSLAVE FOR ZX 81 (16K)



"Your calculating slave at your command! I'm a quite extraordinary programmable program and I can do involved calculations, repeatedly, MASTER"

CRACK YOUR HOME, SCHOOL AND SMALL BUSINESS NUMBER CRUNCHING PROBLEMS with this program and you never again will need to buy or write a calculation program. Features **ERROR-FREE SAFE INPUT ROUTINE, MULTIPLE CHOICES** of expressions and functions, conditional statements for **DECISION MAKING**, up to **20 VARIABLES** per calculation, **SAVE** your programmed expressions on tape, and **MANY MORE FEATURES**.

ONLY £4.95 for the standard program tape and **COMPLETE DOCUMENTATION**. Send s.a.e. for **FREE FACTSHEET** and for details of modified programs.

SOFTOUCH, 16 WEST LEYS, ST IVES, HUNTINGTON, CAMBS.

Fight your way to Stand V9 at the COMPUTER FAIR

To see the
ZX81
Colour Programmable
Character Generator

10 Ports (with interrupts!)
DMA transfers
Programable display size
Prestel — Compatable
Foremat etc etc

Fountain Computers Ltd.



FOOTBALL MANAGER

A GREAT NEW GAME
from

Addictive Games

for ZX81, ZX80, TRS80, VIDEO GENIE

JUST LOOK AT THESE FEATURES

- ★ 4 Divisions ★ Promotion & Relegation ★
- ★ F.A. Cup ★ Full League Tables ★
- ★ Transfer Market (Buy and Sell Players) ★
- ★ Pick your Team for each Match (but watch out for Injuries!) ★
- ★ As many Seasons as you like ★
- ★ 7 levels of Play (from Beginner to Genius!) ★
- ★ Managerial Rating (tells you how good you REALLY are!) ★
- ★ Save Game Facility (continue again another time) ★

All this and much much more packed tightly into 16K RAM

**"IF YOU LIKE FOOTBALL
YOU'LL LOVE THIS GAME"**

HARDWARE REQUIRED:

| | |
|-------------------|-----------------------|
| ZX81/ ZX80 | TRS80/ Video Genie |
| 8K ROM 16K RAM | LEVEL II 16K RAM |

To Order send Cheque/ P.O for £9.95
made payable to:
ADDICTIVE GAMES
at:
P.O. BOX 278
CONNIBURROW
MILTON KEYNES
MK14 7NE
PLEASE STATE COMPUTER

AVALON HILL

MICROCOMPUTER GAMES

No less than 10 thrilling, action packed games on cassette, suitable for use with Pet, TRS 80 and Apple computers. And our latest titles include programs for the Atari.



TANKTICS

A unique game which uses a board and counters as well. The computer moderates combat and movement and keeps records letting you plan your strategy in this classic tank vs tank battle.

£15.95 + £1.60 p&p

Also available in this series:

| | |
|---------------------------------------|---------------------------------|
| • MIDWAY CAMPAIGN £10.95 | † PLANET MINERS £10.95 |
| • B-1 NUCLEAR BOMBER £10.95 | † LORD OF KARMA £12.95 |
| • NORTH ATLANTIC CONVOY RAIDER £10.95 | # EMPIRE OF THE OVERMIND £18.95 |
| • NUKEMAR £10.95 | ** CONFLICT 2500 £10.95 |
| • 16k all machines | • ACQUIRE £12.95 |

† 16k TRS 80, Apple, PET: 24k Atari †† 48k TRS 80; 32k Apple, PET; 40k Atari
48k TRS 80, Apple: 40k Atari :
not available for PET

All games on cassette only
When ordering by mail, please add £1.60 postage & packing per game. Please send cheque/PO's to: **AVALON HILL GAMES**, 650 High Road, North Finchley, London N12 0NL, Dept YC4
LOOK OUT FOR MORE NEW MICROCOMPUTER GAMES IN 1982.
Trade enquiries welcome.

ACORN ATOM

Special Offer Christmas Prices

| | |
|-----------------------------|------|
| Atom kit with 12k ram | £162 |
| Atom assembled with 12k ram | £187 |
| Games cassette Atom G1 | £6 |
| Atom Power Supply | £10 |

All prices fully inclusive of VAT and P&P
Please allow 28 days for delivery

ELECTRONEQUIP
128 West Street, Porchester
Hants PO16 9XE
Telephone: 0705-373455

BRIDGE SOFTWARE

Quality Software

"I have bought numerous other items of software . . . Yours are excellent . . . They LOAD well, have perfect instructions . . . the most user-friendly I have ever met." (P.R. Notts)

NEW! 16k RAM Pack for ZX81 £37-
including FREE "GALAXY INVADERS" cassette

ZX81 Software

SAMPLE PRICES

| | |
|---|-------|
| GALAXY INVADERS (requires minimum 4K RAM) cassette and instructions | £3.00 |
| 1K GAMES (5 games — no additional memory needed) cassette and instructions | £3.00 |

"Just a short note to say how good your Space Invader cassette is . . . I will recommend your company any day." (S.A.R. Preston)

"I have just received your cassette of GALAXY INVADERS which I think is the best on the market . . . I am very pleased with your quick service." (S.C. Beds.)

"Enjoying 'GAMES' very much — 'Letter Square' is quite addictive." (F.W. Manchester)

| | |
|---|-------|
| MULTIGRAPHICS 2.3 (requires minimum 16K RAM) cassette and 20 page illustrated Manual | £4.50 |
| 1K GRAPHICS (4 programs — no additional memory needed) cassette and instructions | £3.00 |
| 1K STATISTICS (4 programs — no additional memory needed) cassette and instructions | £3.00 |

"I acknowledge receipt of . . . MULTIGRAPHICS and STATISTICS. Having experienced nothing but trouble with *****'s software, I was agreeably surprised by the good quality and flexibility of your products." (V.S. Berks.)

ZX80 software now half price

NEW! INVADERS for VIC-20 COLOUR COMPUTER £6-90
(no additional memory needed) cassette and instructions

Send s.a.e. for further info, detailing your computer, memory etc.

BRIDGE SOFTWARE (Y) *Mail order only*

36 FERNWOOD, MARPLE BRIDGE,
STOCKPORT, CHESHIRE SK6 5BE
Prices include VAT, post and packing in U.K.
European customers add 30p per item. Worldwide, 70p per item

PSION COMPUTERS

ZX81-16K RAM BACKGAMMON

the oldest game on the youngest computer

"Backgammon is a great game—easy to learn, fast, exciting, a perfect game of chance and skill . . . it has lasted for three thousand years"

£5.95
including VAT and postage

Psion Computers brings you a program of the highest quality to play Backgammon on the Sinclair ZX81. It plays with remarkable skill using high-speed machine-code to evaluate the statistics and strategy of the game—outstanding display, rolling dice, doubling cube, 4 levels of play.

Also from PSION
£3.85
including VAT and postage

Sci-Fi FANTASY GAMES
Side A: Perilous Swamp, Side B: Sorcerer's Island
Role-playing adventure-style games

Dear Sir,
Many thanks for the Fantasy Games cassette received on the 5th.
An excellent cassette, looks for hours and is great fun to play

PSION Cassettes are factory produced by high-speed automated equipment under strict quality control. Colourful printed inserts contain detailed description and instructions

I enclose a postal order/cheque for £
in payment for

☐ Backgammon (£5.95) ☐ Fantasy Games (£3.85)

Name

Address

To: Psion Ltd
2 Huntsworth Mews
Gloucester Place
London NW1 6DD

POET

ZX81 (16K) Software

Not only does it write verse but it has different moods.

It can concentrate on a single theme. Or it can produce a thought-provoking range of images.

You can also modify its vocabulary — but please do not make it too saucy!

Price £4.95 incl postage

from

microZ

Dept (Y), 86 Lowther Road, London SW13

VIDEO GENIE-TANDY OWNERS

JOYSTICKS

Atari Joystick interfaced for your computer. Will work with all the Big 5 Joystick Games, Tandy Model 1 Level 2 £22.50, Video Genie £22.50. Single Joystick.



LE STICK

The ultimate Joystick. Real Home Arcade Action. Brings those Joystick games to life. Tandy Model 1 Level 2 £32, Video Genie £32, Tandy Colour Computer £25 Single Joystick.



JOYSTICK GAMES

For use with above. Galaxy Invasion, Attack Force, Robot Attack, Cosmic Fighter, Meteor Mission. ALL £9.95

TANDY COLOUR COMPUTER OWNERS

Now available — Chromasette Magazine. A monthly tape of at least six programs. Single copy £5.95, 6 month sub. £32, 12 month £55.

VIDEO GENIE & TANDY MODEL 1 & 3

Now available in UK — Cload Magazine

America's monthly program tape for games orientated people. Why pay high prices when each month you can receive a cassette with at least six programs. Latest issue includes:

SPACE WAR Fight the enemy as he flies at you. **CATERPILLAR** Similar to the arcade game "Centipede". **ELEPHANT ADVENTURE** Full length Safari adventure program. Plus four other programs.

Single cassette £5.75 6 month subscription £28.50 12 month subscription £52.00. All programs for Model 1 Level 2. Most for Model 3. Over 44 back issues available plus many programs for Level 1.

Post your order to:

MICRODEAL
Deal House, Bridges, Bodmin, Cornwall

ALL PRICES INCLUDE TAX AND POSTAGE

ATOM SPECIALISTS



- New Full Size "No Bounce" Keyboard
- Basic & Assembler
- High Resolution Graphics
- Wide Choice of Software

| | |
|--|-------|
| 8K + 2K Kits..... | £112 |
| 8K + 2K Kits..... | £119* |
| 8K + 2K Assembled & Tested..... | £129 |
| 8K + 2K Assembled & Tested..... | £149* |
| 8K + 12K Assembled & Tested..... | £174* |
| 12K + 12K Assembled & Tested..... | £194* |
| 12K + 12K with Printer Interface..... | £205* |
| 16K + 38K Text Editor & Printer I/face..... | £322* |
| Floppy Disc Drive & Utilities..... | £298 |
| Bus Buffer Pack & Connectors for Floppy Disc..... | £ 10 |
| New Atom Power Supply..... | £ 8 |
| GP/80 Printer with ATOM Lead..... | £195 |
| 2114L RAM Chips — each..... | 99p |
| Econet — ATOM Interface..... | £ 70 |
| "NEW" 2K/4K PROM Programmer — for use with ATOM — incl. Software..... | £ 40 |
| All Acornsoft ATOM Software plus others Spares & Repairs Service | |

Post FREE on all orders over £25

Add 50p Postage on orders below £25

Send for Stock Lists and Prices

Add 15% V.A.T. to ALL prices


D.A. COMPUTERS LTD.,
184 LONDON ROAD, LEICESTER LE2 1ND
Telephone: (0533) 549407

GRAPHICS & GRAPHICS GRAPHICS

What's going on in Computer Aided Design — and how will it develop? Ever wondered about the maths behind interactive 3-D graphics? Want to know about the graphics capabilities of the powerful Hewlett Packard HP-83?

Our April issue examines three aspects of graphics in computing. We review Grandstand, a game for gamblers with a Pet computer; show how microprocessor control has come to the farm...

That's just a sample of Practical Computing, together with advice for users of Pet, Apple, Tandy and Sinclair ZX 80/81 computers. Buy Britain's leading personal computer magazine.

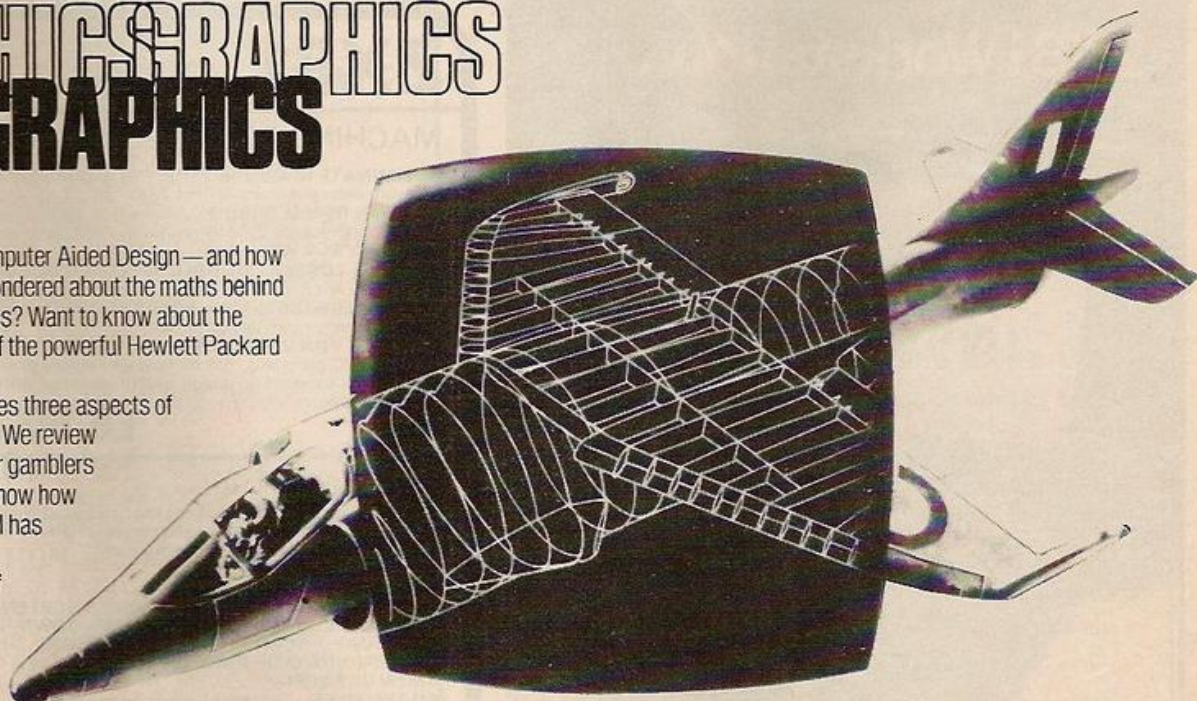

Practical Computing

APRIL ISSUE OUT NOW. 80p AT YOUR NEWSAGENT'S — BUT HURRY.

ZX81 with 16K RAM-PACK 6 GAMES ON CASSETTE FOR ONLY £3.50 (Post free)

Not one, not two, but SIX exciting games on one high-quality cassette, ready to load on your ZX81 with add-on 16K RAM pack. Easy to operate, fun to play! Hours of entertainment for all the family! Comes with full documentation, games descriptions and easy-to-follow loading instructions.

● **THE MONSTERS OF DRARGOOL** Enter the underground labyrinth of Drargool at your peril. Risk death fighting the many weird and fierce monsters in your search for treasure. Only the luckiest get their treasure out alive!

● **SNAIL RACE** Back the snail you fancy in each of four races — unless you lose your shirt first! Constant on-screen display reminds you how much cash you've got, which snail you backed and at what odds (which vary from race to race and game to game).

● **GUNFIGHT** Shoot it out across a canyon with three desperadoes. Get them all before they get you!

● **ROULETTE** For two players against the ZX81. The classic casino game, with eight different betting options and simulated wheel-spin.

● **BATTLESHIPS** The schoolboy game brought up to date. How good a naval gunner will you be?

● **ONE-ARMED BANDIT** Your own "fruit machine" on the TV screen. "Hold" facility and constantly-updated screen display of your progress.

All the above games have informative and attractive screen displays with none of the unpleasant "screen-flashing" that spoils some other ZX81 games. Get your cassette of six games today!

SEND TODAY! MONEY BACK IF NOT DELIGHTED!
Price includes cassette, library case, inlay, documentation and postage. Send £3.50 cash/PO/cheque to:

MOVIEDROME VIDEO (YC1)
19 Leighton Avenue, Pinner HA5 3BW



SCISOFT

PROGRAMS for EDUCATION 16K ZX81

REVISE

ALL PROGRAMS FULLY TESTED BY SCHOOLS

'O' level PHYSICS

PASS 'O' LEVEL PHYSICS

- PROGRAMS
1. EQUATIONS AND UNITS
More than 100 multiple choice equations on:
LIGHT & SOUND; HEAT & PRESSURE;
MECHANICS; ELECTRICITY; S.I. UNITS.
 2. PROBLEMS — 10 Problems. Data randomized.
Superb graphics. Infinite variation in questions. etc.
 3. HINTS ON REVISION. Progress reports incl.
 4. COMPREHENSIVE BOOK OF REVISION NOTES. 2 tapes + notes!

£7.50

MARKBOOK for teachers

PERMANENT RECORD OF MARKS
SORTS by 1. Rank 2. Name 3. Form up to 70 pupils

IDEAL FOR PARENTS EVENING

£4.50

Complete pupil profile. Printer routine incl. menu driven, etc.
Many hidden extras
Plus notes!

SCISOFT
5 MINSTER GARDENS
NEWTORPE,
EASTWOOD, NOTTS.

ZX81 Workstation...



... is a stylish and ergonomic plinth for the ZX81. It raises and tilts the TV to avoid eyestrain, holds the 16K RAM in place and hides the wiring and power supply. This very professional unit costs £15, a built-in power switch is £3, plus postage at £1.50, inc. VAT. Peter Furlong Products, 125 Catford Hill, London SE6 4PR. Callers by appointment, please. Tel 01690 7799. Visa, Access.

ZX81

16K

MACHINE CODE DEBUG/MONITOR

- **ELIMINATE MACHINE CODE PROBLEMS** with ZX-MC — a new software debug/monitor for the ZX81 16K.
- **ENTER, RUN & DEBUG** your machine code programs independently of Basic commands. ZX-MC resides in RAM, and leaves you 12½K of memory to work with.
- **SAVE & LOAD AT DOUBLE SPEED** any specified area of free RAM. At last you are freed from storing your M/C in arrays or REM lines.
- **REGISTERS DISPLAY & BREAKPOINTS** to make de-bugging easier — PLUS many more useful commands.
- **A MUST FOR BEGINNERS & ADVANCED USERS** — concentrate on your M/C programs, not on how and where to store them.
- **ZX-MC** is supplied on a high quality cassette, with a 32 page operating manual, for only

£6.50 fully inclusive (C.W.O.)

SCREEN KIT 1

A suite of machine code routines that are called from Basic programs, to enhance your screen display, and create Data Files on cassette. SCREEN KIT becomes part of your Basic program.

- **DRAW A BORDER**
- **CLEAR PART OF SCREEN**
- **LOAD ANY CHARACTER TO WHOLE SCREEN**
- **CLEAR SCREEN BY SCROLLING UP, DOWN, LEFT OR RIGHT**
- **KEYBOARD SCAN + FLASHING CURSOR**
- **INVERT VIDEO OF PART OF SCREEN**
- **MEMORY LEFT**
- **DATA FILES** — lets you Save & Load, at double speed, just the Basic variables. Different Data Files can now be Loaded into the same Basic program.
- Supplied on cassette with instructions.

£4.95 fully inclusive (C.W.O.)

Send large SAE for more details. Programs available mail order only. Allow up to 14 days delivery. Please make cheques/PO payable to:

PICTURESQUE

6 CORKSCREW HILL, WEST WICKHAM, KENT BR4 9BB

ZX81

HEWSON CONSULTANTS

ZX81

HINTS & TIPS for the ZX81

by ANDREW HEWSON

£4.25

"Good value and quite fascinating . . . a very inexpensive way of acquiring months of programming experience"
Your Computer Nov 1981

"Excellent . . . very good value for money"

SYNC

80 pages explaining how to squeeze a computing quart out of a Sinclair pint pot. Saving Space — vital reading for all ZX81 users. Understanding the Display File — using the display file as memory, clearing a part of the display, using tokens in PRINT statements. Converting ZX80 programs — explaining simply but comprehensively how to convert the hundreds of published ZX80 programs. Chaining programs — revealing techniques for passing data between programs, calling subroutines from cassette and establishing data files. Machine Code Programs — all you want to know about Z80 machine language. Explaining how to write, load, edit and save machine code and how to debug your routines. Routines and programs are scattered liberally throughout the text and the final chapter consists of 12 useful, interesting and entertaining programs such as LINE RENUMBER, BOUNCER, SHOOT, STATISTICS, etc.

16K RAM

£37.50

A top-quality add-on memory, simply plugs into the back of your Sinclair computer. Can be used in conjunction with the ZX printer. Neatly packaged in a black plastic shell to match your ZX81. Supplied with one year's guarantee.



64K MEMORY

£79.00

Developed by Memotech this amazing 64K RAM needs NO extra power supply. Simply plugs neatly and firmly into the rear port of your ZX81. Can be used with the ZX printer and other add-on hardware. Just look at these features . . .
*8-16K can be switched in and out in 4K blocks to leave space for memory mapping.
*12-16K can be protected against overwriting during loading from cassette.
*directly addressable and user transparent.
*up to 15K of basic program.
*32K or more of variable area.

Z80 OP CODES

£1.45

A must for the beginner and the experienced programmer alike. This handy ready reckoner lists all the 600 plus Z80 machine code instructions in decimal and hexadecimal with their mnemonics. Each Op Code is succinctly explained and cross-referenced. Supplied in a protective transparent wallet for easy reference and durability.


Cheque with order or quote access number to:

HEWSON CONSULTANTS, Dept. YC, 7 Grahame Close, Blewbury, Oxon OX11 9EQ. Tel: (0235) 850075

16K SOFTWARE

SPACE INTRUDERS £4.95

Not to be missed. All action display. 40 alien ships in each squadron. Automatic option — the machine plays itself. Squadron after squadron of aliens attack your position. Three laser guns. Full score display. Written in machine code for super fast fun.



PROGRAMMERS TOOLKIT £6.50

Are you writing your own programs for your ZX81? Then use our TOOLKIT to do the donkey work. Copy into RAM before you start work and then you will have it at your fingertips. Comprehensive LINE RENUMBER including GOSUBS and GOTOS; LOAD, EDIT and RUN machine code programs; INSPECT the ZX81 system routines; COPY them into RAM and PATCH and/or EXTEND them; FIND a given piece of BASIC code and replace all occurrences of it; move blocks of Basic lines with EDIT.

LANGUAGE DICTIONARY £3.75

Now you can construct your own English/French, English/Anything dictionary with our LANGUAGE DICTIONARY. UPDATE the entries, SEARCH for a word, CREATE a new dictionary and save it on tape.

1K SOFTWARE

MINI INTRUDERS for the 1K machine £3.95

An incredibly fast moving game, dodge left and right to avoid falling missiles. Fire Salvo after Salvo at the attacking alien squadron, more aliens join the squadron all the time. Count how many laser bases you lose before you have cut them down.

PLANET LANDER £3.75

Four programs:
i) Planet Lander; ii) Space Docking; iii) Stopwatch; iv) Clock.

STATISTICS £3.75

Three programs:
(1) (I) Statistics; prints the current mean and standard deviation after each value is entered. (II) Regression; prints the current mean and standard deviation of the y values, the x values and the intercept and slope of the regression line. (III) Trend; prints the current mean and standard deviation of the y values; the x values and the intercept and slope of the trend line.
(2) Chi square test calculates the value of the chi square statistic for comparing observed and expected values.
(3) Graph plot; plots a graph of data entered from the keyboard.

FREE
Software

INSTANT INTERACTIVE GRAPHICS ON ZX81

LIGHT PEN SET **£49.50**
for the RD 8100 (includes VAT & P&P)

- *DRAW complex graphics with ease on your TV screen and avoid tedious line by line programming.
- *Revise your display and SAVE on cassette, while your program runs.
- *Push pictures points and pixels with a poke of the Pen and a program PEEK. Try our VIDEO-TIDDLYWINKS!
- *MENU SELECTION — without keyboard entry.

The RD 8100 LIGHT PEN SET consists of the RD 8101 'MICROMUM' MOTHERBOARD, the RD 8180 LIGHT PEN with MODULE, and the RD 8100 SYSTEM MANUAL. Plug into your ZX81 — and LOAD, from the FREE RD 8100 SOFTWARE CASSETTE (1K and 16K), or write your own BASIC programs.

All orders are acknowledged, with a firm delivery date. Send just £49.50 (VAT and postal charges are included) to:

R D Laboratories

5 Kennedy Road, Dane End, Ware, Herts.
SG12 0LU (0920 84380)

For details of the Full RD 8100 SYSTEM of ZX81 interfaces, including Logic I/O, Analogue Input, Analogue Output, 8-Channel Analogue Multiplexer, Buffered Motherboard, send us a stamp.

COMPUTACALC ZX

| FAMILY BUDGET FIGURES | | | | | | | | | | | |
|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| DECEMBER 1981 | | | | | | | | | | | |
| MORTGAGE | 167 | 167 | 167 | 167 | 167 | 167 | 167 | 167 | 167 | 167 | 167 |
| PHONE | 42 | | | | | | | | | | |
| GAS | | 52 | | | | | | | | | |
| ELECT. | | 43 | | | | | | | | | |
| CAR | 63 | 71 | 63 | 61 | 70 | 68 | | | | | |
| INSUR. | 12 | 12 | 12 | 12 | 12 | 12 | | | | | |
| RATES | | | | | | | 235 | | | | |
| TOTAL | 284 | 290 | 234 | 275 | 254 | 27 | | | | | |

Financial Planning for the ZX81 16K

Ideal for solving "what if" problems at work or home. The screen acts as a window on an "electronic worksheet" consisting of a grid of rows and columns of headings, numbers or formulae.

This powerful piece of software brings the capabilities of the ZX81 into line with much more expensive computers. Computacalc will quickly become the most used program in your library as it takes over from pen, paper and calculator in aiding everyday financial decisions. For further details see Guy Kewney's article in Datalink 30/11/81, send SAE or ring 01-603 6074.

For cassette and full documentation send cheque or P.O. for £7.95 to: **Silicon Tricks, Dept. C5, 2-4 Chichester Rents, Chancery Lane, London WC2.**

**Silicon
Tricks**



Apple II + 48K £649.00
Disk drive + controller £349.00
Disk drive £289.00
16K Ram card £60.00
Parcal system £239.95

● APPLE SOFTWARE

Visicalc (3.3) £99.00
Visiplot £95.00
Visidex £9.00
Visitrend/plot £135.00
Apple word £29.95
Apple writer £35.00
Desk top lan II £105.00
DOS plus £19.95
Aplus £19.95
Appleguard £19.95

● WORD PROCESSING

Apple Writer (I) £39.00
Apple writer II (80 col) p.o.a.
Magic window £59.95
Mailmerge (80 col) £60.95
Wordstar

● MONITORS

12" green screen £129.95
9" b/w Hi-Risul £127.95

● COLOUR MONITOR

14" JVC PAL/SECAM/NTSC £299.95
Euro colour card £69.00
Integer card £95.00
Language card £97.50
Parallel interface card £87.00
Communication card £99.00
Centosonic card £99.00
High speed serial card £94.95

WHAT'S the CATCH?

HOW COME THESE PRICES ARE SO LOW?
There is no catch except you always catch a good deal at DEANS

● PRINTERS

Silentype £190.00
Centosonic 737 £345.00
Paper Tiger £545.00
Epson
MX80 T2 £399.00
MX80 FT/1 £395.00
Epson/Sharp cassette £65.00
Epson/Sharp disk p.o.a.

● GAMES

Space Warrior, Alien Rain, All Snoggle, Galaxy Wars, Gobbler, Star Cruiser, Alien, Typhoon, Cribbage, Galactic Empire all at £12.95
Star Mines, Apple Panic, Tartusian, Tawala's Creature, venture, all at £14.95
Star Thief, Missile Defence, Epoch, Soft Porn Adventure, The Wizard and the Princess, Threshold, Sneakers, Oldofa Revenge, Peagus II all at £17.95



● PC 1211

PC1211 Pocket computer £69.95
CE121 Cassette Interface £10.95
CE122 Printer £59.95
CSR700 Paper roll (40) p.o.a.

● MZ80K

MZ80K computer 48K £345.00
MZ80FD Dual disk £550.00
MZ80P3 Dot printer £360.00
MZ80F I/O Disk interface £49.95
MZ80F 15 Disk cable £8.00
MZ80 I/O Expansion box £94.00
MZ80T 20C Machine language £18.00
MZ80TU Assembler £35.00
400 16K computer £295.00
800 16K computer £549.00
16K Ram upgrade £49.95
Disk drive £295.00



● VIDEO RECORDERS

Sony SLC5 £390.95
Sony SLC7 £548.10
JVC HS7200 £451.53
JVC HR7300 £451.53
Akai VS5

● FLOPPY DISC

5 1/4" Verbatim SS/DD £2.30
5 1/4" Verbatim SS/DDX10 £19.95
5 1/4" Verbatim DS/DD £2.60

● BOOKS

APPLE
Apple II Ref. Manual £11.00
6502 Assembly language £12.10
DOS 3.2 Manual £6.00
Apple II Basic tutorial Pascal Reference Manual £8.50

● ZX81

Getting Acquainted with your ZX81 £5.95
Mastering Machine code on your ZX81 or 80 £5.95
The Gateway Guide to the ZX81 and ZX80 £5.95
49 Explosive Games for the ZX81 £5.25

MOST of our prices are heavily discounted therefore please send cheques payable to DEANS. Credi-card sales add 3%. Add 15% VAT. Postage and packing free on books and software.

DEANS of Kensington
191 KENSINGTON HIGH STREET, LONDON W8
Tel. 01-937 7896 Ext. 3.

ZX81 users

I need more memory!
please rush me within
10 days, the fully assembled,
tested and guaranteed
'BYG BYTE'

16K RAM

Name
Address

Make all cheques & PO's payable to:
Phoenix Marketing, Oaklands House,
Colartron Road, Farnborough, Hants.
Tel (0252) 514990

FULLY INCLUSIVE PRICE

£34.95

ADVERTISEMENT INDEX

| | | | |
|--------------------------|------------|------------------------------|---------------------|
| Abacus Electronics | 90 | Jelbond | 52 |
| Acorn | 6 & 7 | JRS Software | 13 |
| ADDA Computers Ltd. | 69 | K D Electronics | 39 |
| Addictive Games | 101 | Laser Bug | 96 |
| A F Software | 95 | Linsac | 94 |
| Altim Trading | 9 | London Computer Fair | 97 |
| A P Electronics | 66 | Lowe Electronics | 2 & 85 |
| Artic | 89 | Macronics | 100 |
| Audio Computers | 44 | MDR Interface | 82 |
| AvaLon | 52 | Melbourne House | 88 |
| Avon Computer | 98 | Michael Orwin | 59 |
| Basicare Micros | 89 | Micro Age | 36 |
| Bee Bug | 47 | Micro Gen | 51 |
| Bridge Software | 102 | Micro 80 | 8 |
| Buffer Micro Shop | 91 | Micro Deal | 103 |
| Bug-Byte | 22, 23 | Micro Games Simulations | 99 |
| Butler Currie & Hook | 66 | Microstore | 14 |
| Byte Shop | Back cover | Microstyle | 86 |
| Calculex | 100 | Microz | 102 |
| Cambridge Computer Store | 63 | Mine of Information | 47 |
| CEL | 63 | Monolith | 99 |
| Chromasonic | 84 | Moviedrome | 104 |
| Commodore | 35 | National user ZX-80 club | 94 |
| Computer 100 | 36 | Norfolk Computer Consultancy | 63 |
| Computer Contact | 59 | Oakleaf | 60 |
| Computer Fair | 30 & 31 | Phipps Associates | 60 |
| Computabits | 93 | Phoenix | 106 |
| Computers For All | 5 | Picturesque | 104 |
| Computer User Aides | 13 | Premier Publications | 64 |
| C Soft | 59 | Practical Computing | 10 |
| Comp Shop | 74 | PR Software | 9 |
| Control Technology | 92 | Program Publications | 64 |
| D A Computers | 103 | Psion Computers | 102 |
| Deans Electronics | 91 | Quicksilver | 98 |
| Deans of Kensington | 106 | Ramtronics | 96 |
| D K Tronics | 10 & 11 | RD Laboratories | 105 |
| DLS Associates | 94 | Redditch Electronics | 96 |
| DRG | 18 | SCI Soft | 104 |
| East London Robotics | 9 | Shiva Publishing | 96 |
| Educare | 78 | Silicon Tricks | 105 |
| Elbee Graphics | 100 | Sinclair | 53, 54, 55, 56, 107 |
| Electronique | 102 | Silversoft | 8 |
| Eltek Services | 101 | Simon Software | 99 |
| Elinca | 98 | Softouch | 101 |
| Essential Software | 47 & 73 | SRS | 90 |
| Frome Computers | 52 | Tangerine Computers | 4 |
| Furlong Products | 104 | Thurnell Engineering | 66 |
| Fountain | 52 | Time Data | 82 |
| Glenrothes, Ian Stuart | 100 | Twickenham Computers | 82 |
| Grege, J. K. Software | 98 | Video Software | 87 |
| Holdco | 78 | Wideband | 9 |
| Holdco/Hilderbay | 70 | William Stuart System | 60 |
| Hewson Consultants | 105 | ZX Guarantees | 95 |
| J D Electronics | 91 | ZX80 Microfair | 13 |

Make the most of your Sinclair ZX Computer...

Sinclair ZX software on cassette.

£3.⁹⁵ per cassette.

The unprecedented popularity of the ZX Series of Sinclair Personal Computers has generated a large volume of programs written by users.

Sinclair has undertaken to publish the most elegant of these on pre-recorded cassettes. Each program is carefully vetted for interest and quality, and then grouped with other programs to form a single-subject cassette.

Each cassette costs £3.95 (including VAT and p&p) and comes complete with full instructions.

Although primarily designed for the Sinclair ZX81, many of the cassettes are suitable for running on a Sinclair ZX80 - if fitted with a replacement 8K BASIC ROM.

Some of the more elaborate programs can be run only on a Sinclair ZX Personal Computer augmented by a 16K-byte add-on RAM pack.

This RAM pack and the replacement ROM are described below. And the description of each cassette makes it clear what hardware is required.

8K BASIC ROM

The 8K BASIC ROM used in the ZX81 is available to ZX80 owners as a drop-in replacement chip. With the exception of animated graphics, all the advanced features of the ZX81 are now available on a ZX80 - including the ability to run much of the Sinclair ZX Software.

The ROM chip comes with a new keyboard template, which can be overlaid on the existing keyboard in minutes, and a new operating manual.

16K-BYTE RAM pack

The 16K-byte RAM pack provides 16-times more memory in one complete module. Compatible with the ZX81 and the ZX80, it can be used for program storage or as a database.

The RAM pack simply plugs into the existing expansion port on the rear of a Sinclair ZX Personal Computer.



Cassette 1 - Games

For ZX81 (and ZX80 with 8K BASIC ROM)

ORBIT - your space craft's mission is to pick up a very valuable cargo that's in orbit around a star.

SNIPER - you're surrounded by 40 of the enemy. How quickly can you spot and shoot them when they appear?

METEORS - your starship is cruising through space when you meet a meteor storm. How long can you dodge the deadly danger?

LIFE - J.H. Conway's 'Game of Life' has achieved tremendous popularity in the computing world. Study the life, death and evolution patterns of cells.

WOLFPACK - your naval destroyer is on a submarine hunt. The depth charges are armed, but must be fired with precision.

GOLF - what's your handicap? It's a tricky course but you control the strength of your shots.

Cassette 2 - Junior Education: 7-11-year-olds

For ZX81 with 16K RAM pack

CRASH - simple addition - with the added attraction of a car crash if you get it wrong.

MULTIPLY - long multiplication with five levels of difficulty. If the answer's wrong - the solution is explained.

TRAIN - multiplication tests against the computer. The winner's train reaches the station first.

FRACTIONS - fractions explained at three levels of difficulty. A ten-question test completes the program.

ADDSUB - addition and subtraction with three levels of difficulty. Again, wrong answers are followed by an explanation.

DIVISION - with five levels of difficulty. Mistakes are explained graphically, and a running score is displayed.

SPELLING - up to 500 words over five levels of difficulty. You can even change the words yourself.

Cassette 3 - Business and Household

For ZX81 (and ZX80 with 8K BASIC ROM) with 16K RAM pack

TELEPHONE - set up your own computerised telephone directory and address book. Changes, additions and deletions of up to 50 entries are easy.

NOTE PAD - a powerful, easy-to-run system for storing and

retrieving everyday information. Use it as a diary, a catalogue, a reminder system, or a directory.

BANK ACCOUNT - a sophisticated financial recording system with comprehensive documentation. Use it at home to keep track of 'where the money goes,' and at work for expenses, departmental budgets, etc.

Cassette 4 - Games

For ZX81 (and ZX80 with 8K BASIC ROM) and 16K RAM pack

LUNAR LANDING - bring the lunar module down from orbit to a soft landing. You control attitude and orbital direction - but watch the fuel gauge! The screen displays your flight status - digitally and graphically.

TWENTYONE - a dice version of Blackjack.

COMBAT - you're on a suicide space mission. You have only 12 missiles but the aliens have unlimited strength. Can you take 12 of them with you?

SUBSTRIKE - on patrol, your frigate detects a pack of 10 enemy subs. Can you depth-charge them before they torpedo you?

CODEBREAKER - the computer thinks of a 4-digit number which you have to guess in up to 10 tries. The logical approach is best!

MAYDAY - in answer to a distress call, you've narrowed down the search area to 343 cubic kilometers of deep space. Can you find the astronaut before his life-support system fails in 10 hours time?

Cassette 5 - Junior Education: 9-11-year-olds

For ZX81 (and ZX80 with 8K BASIC ROM)

MATHS - tests arithmetic with three levels of difficulty, and gives your score out of 10.

BALANCE - tests understanding of levers/fulcrum theory with a series of graphic examples.

VOLUMES - 'yes' or 'no' answers from the computer to a series of cube volume calculations.

AVERAGES - what's the average height of your class? The average shoe size of your family? The average pocket money of your friends? The computer plots a bar chart, and distinguishes MEAN from MEDIAN.

BASES - convert from decimal (base 10) to other bases of your choice in the range 2 to 6.

TEMP - Volumes, temperatures - and their combinations.

How to order

Simply use the order form below, and either enclose a cheque or give us the number of your Access, Barclaycard or Trustcard account. Please allow 28 days for delivery. 14-day money-back option.

Sinclair ZX SOFTWARE

Sinclair Research Ltd,
6 Kings Parade, Cambridge,
Cambs., CB2 1SN. Tel: 0276 66104.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GU15 3BR. Please print
Please send me the items I have indicated below.

| Qty | Code | Item | Item price | Total |
|-----|------|-------------------------------------|------------|-------|
| | 21 | Cassette 1 - Games | £3.95 | |
| | 22 | Cassette 2 - Junior Education | £3.95 | |
| | 23 | Cassette 3 - Business and Household | £3.95 | |
| | 24 | Cassette 4 - Games | £3.95 | |
| | 25 | Cassette 5 - Junior Education | £3.95 | |
| | 17 | *8K BASIC ROM for ZX80 | £19.95 | |
| | 18 | *16K RAM pack for ZX81 and ZX80 | £49.95 | |
| | | *Post and packing (if applicable) | £3.95 | |
| | | | Total £ | |

*Please add £2.95 to total order value only if ordering ROM and/or RAM.

I enclose a cheque/PO to Sinclair Research Ltd for £

Please charge my Access*/Barclaycard/Trustcard no.

*Please delete as applicable.

Name: Mr/Mrs/Miss

Address:

YOC 04



VIC-20

See it here, buy it now
AT YOUR LOCAL
BRANCH TODAY!

Birmingham Byteshop Computerland 94/96 Hurst St, B5 4TD **Tel:** 021 622 7149 **London** Byteshop Computerland 324 Euston Road, London W1 **Tel:** 01-387 0505 **Nottingham** Byteshop Computerland 92A Upper Parliament St NG1 6LF **Tel:** 0602 40576 **Manchester** Byteshop Computerland 11 Gateway House Piccadilly Station Approach **Tel:** 061 236 4737 **Glasgow** Byteshop Computerland Magnet House 61 Waterloo St, G2 7BP **Tel:** 041 221 7409

A member of the Comart Group of Companies.

106 HILARY AVE